


OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSION ITEMS

Symbol	Definition and Description
L1	Horizontal distance from datum point to rearmost point of power unit
L2	Horizontal distance from datum point to forefront (depends on the model) of power unit
L3	Distance from datum point to farthest point on tiller handle, when the handle is in horizontal position (in use)
L4	Horizontal distance from datum point to rearmost point of the lower case
L5	Minimum distance from transom board or its extension to forefront of the lower case, with motor fully trimmed down and steered to the full
L6	Horizontal distance from datum point to rearmost point of protrusion when motor is tilted up (over-tilt position)
L7	Horizontal distance from datum point to protruded forefront when motor is tilted up (over-tilt position)
L8	Horizontal distance from datum point to lowest point of protrusion when motor is tilted up (over-tilt position)
L9	Horizontal forward protrusion of lower case from the datum line when PTT is fully trimmed down
L10	Horizontal distance from datum point to bracket shaft (bolt) center
H1	Vertical distance from datum point to lowest point of motor
H2	Vertical distance from datum point to highest point of power head
H3	Vertical distance from anti-cavitation plate undersurface to the center of propeller shaft
H4	Vertical distance from datum point to anti-cavitation plate undersurface
H5	Vertical distance from datum point to tiller handle tip when the handle is in vertical position
H6	Vertical distance from skeg tip at H1 to the lowest point of lower unit when motor is tilted up (over-tilt position)
H7	Vertical distance from datum line to protruded forefront when motor is tilted up (over-tilt position)
H8	Vertical distance from datum line to lowest point of protrusion when motor is tilted up (over-tilt position)
H9	Vertical distance to the highest point of the motor when it is tilted up (over-tilt position)
H10	Vertical distance from datum point to bracket shaft (bolt) center
H11	Difference in the height of lower unit lowest point comparing to the height in the standard position and with PTT in the fully trimmed down position
W1	Leftward protrusion from center line of motor body when looking at the front face
W2	Distance from tiller handle tip to centerline of motor body when looking at the front face
W3	Distance from centerline to left or right edge of motor body, except for levers and handles
W4	Distance from centerline to left or right end of motor body protrusion, except for levers and handles
W5	Distance from centerline to the farthest point on the body when steered to the maximum angle
W6	Distance from centerline to the farthest point on the tiller handle when steered to the maximum angle
A1	Maximum steering angle each way (symmetrical), from centerline of motor body
A2	Tilt up angle (whole rotating range to over-tilt angle including negative trim angle)
A3	Maximum negative trim angle from the vertical line through the datum point
T1	Centerline-to-centerline minimum distance of the engines in case of twin installation

OUTBOARD MOTOR DIMENSIONS

OVERALL DIMENSION ITEMS

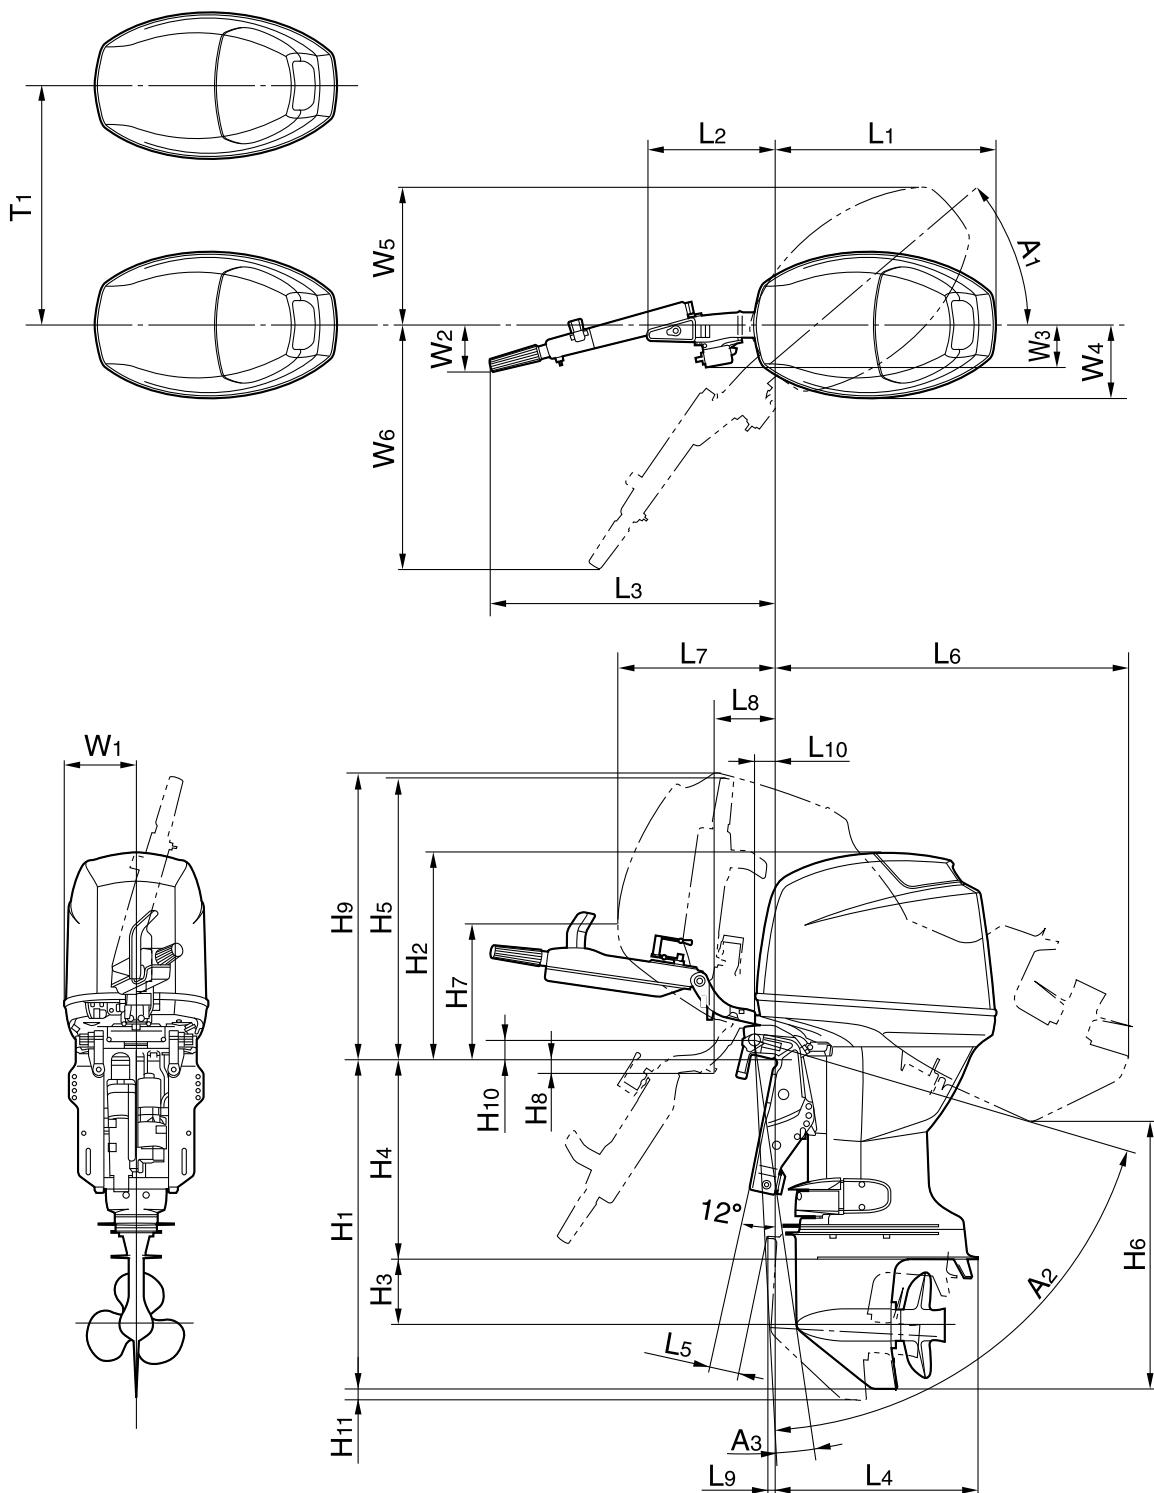

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model) Symbol		F2BMH F2.5BMH	(F2.5MHB) w/ EPA cap	F4BMH F5AMH F6CMH	(F4MHA) (F6MHA) w/ EPA cap	F8FWH	F8FMH (F8MH-B) F9.9JMH (F9.9MH-B) F9.9JEH (F9.9EHB) F9.9JWH	F9.9JE (F9.9EB)	FT8GMH FT9.9LMH (T9.9MH-B) FT9.9LWHD (T9.9EHB)
L1	mm (in)	316 (12.4)	316 (12.4)	409 (16.1)	409 (16.1)	436 (17.2)	436 (17.2)	436 (17.2)	436 (17.2)
L2	mm (in)	80 (3.1)	80 (3.1)	130 (5.1)	130 (5.1)	124 (4.9)	124 (4.9)	121 (4.8)	121 (4.8)
L3	mm (in)	309 (12.2)	309 (12.2)	341 (13.4)	341 (13.4)	547 (21.5)	547 (21.5)	—	607 (23.9)
L4	mm (in)	214 (8.4)	214 (8.4)	259 (10.2)	259 (10.2)	356 (14.0)	356 (14.0)	356 (14.0)	367 (14.4)
L5	S L X U	mm (in)	57 (2.2)	57 (2.2)	71 (2.8)	71 (2.8)	—	49 (1.9)	49 (1.9)
			57 (2.2)	57 (2.2)	93 (3.7)	93 (3.7)	67 (2.6)	67 (2.6)	67 (2.6)
			—	—	—	—	—	—	67 (2.6)
			—	—	—	—	—	—	—
L6	S L X U	mm (in)	633 (24.9)	633 (24.9)	635 (25.0)	635 (25.0)	—	707 (27.8)	707 (27.8)
			753 (29.6)	753 (29.6)	753 (29.6)	753 (29.6)	823 (32.4)	823 (32.4)	823 (32.4)
			—	—	—	—	—	—	943 (37.1)
			—	—	—	—	—	—	—
L7	mm (in)	332 (13.1)	348 (13.7)	383 (15.1)	401 (15.8)	276 (10.9)	276 (10.9)	276 (10.9)	276 (10.9)
L8	mm (in)	142 (5.6)	142 (5.6)	134 (5.3)	134 (5.3)	141 (5.6)	141 (5.6)	138 (5.4)	138 (5.4)
L9	S L X U	mm (in)	—	—	—	—	18 (0.7)	18 (0.7)	—
			—	—	—	—	27 (1.1)	27 (1.1)	27 (1.1)
			—	—	—	—	—	—	27 (1.1)
			—	—	—	—	—	—	—
L10	mm (in)	57 (2.2)	57 (2.2)	63 (2.5)	63 (2.5)	66 (2.6)	66 (2.6)	66 (2.6)	66 (2.6)
H1	S L X U	mm (in)	645 (25.4)	645 (25.4)	644 (25.4)	644 (25.4)	—	677 (26.7)	677 (26.7)
			772 (30.4)	772 (30.4)	771 (30.4)	771 (30.4)	804 (31.7)	804 (31.7)	804 (31.7)
			—	—	—	—	—	—	932 (36.7)
			—	—	—	—	—	—	—
H2	mm (in)	383 (15.1)	404 (15.9)	395 (15.6)	410 (16.1)	331 (13.0)	331 (13.0)	331 (13.0)	331 (13.0)
H3	mm (in)	102 (4.0)	102 (4.0)	104 (4.1)	104 (4.1)	123 (4.8)	123 (4.8)	123 (4.8)	157 (6.2)
H4	S L X U	mm (in)	433 (17.0)	433 (17.0)	435 (17.1)	435 (17.1)	—	431 (17.0)	431 (17.0)
			560 (22.0)	560 (22.0)	562 (22.1)	562 (22.1)	558 (22.0)	558 (22.0)	558 (22.0)
			—	—	—	—	—	—	620 (24.4)
			—	—	—	—	—	—	—
H5	mm (in)	470 (18.5)	470 (18.5)	430 (16.9)	430 (16.9)	614 (24.2)	614 (24.2)	—	678 (26.7)
H6	S L X U	mm (in)	551 (21.7)	551 (21.7)	555 (21.9)	555 (21.9)	—	604 (23.8)	604 (23.8)
			637 (25.1)	637 (25.1)	637 (25.1)	637 (25.1)	682 (26.9)	682 (26.9)	682 (26.9)
			—	—	—	—	—	—	730 (28.7)
			—	—	—	—	—	—	771 (30.4)
H7	mm (in)	298 (11.7)	309 (12.2)	191 (7.5)	194 (7.6)	216 (8.5)	216 (8.5)	216 (8.5)	216 (8.5)
H8	mm (in)	27 (1.1)	27 (1.1)	1 (0.0)	1 (0.0)	7 (0.3)	7 (0.3)	8 (0.3)	8 (0.3)
H9	mm (in)	419 (16.5)	419 (16.5)	503 (19.8)	503 (19.8)	527 (20.8)	527 (20.8)	527 (20.7)	609 (24.0)
H10	mm (in)	31 (1.2)	31 (1.2)	39 (1.5)	39 (1.5)	37 (1.5)	37 (1.5)	37 (1.5)	37 (1.5)
H11	S L X U	mm (in)	—	—	—	—	19 (0.7)	19 (0.7)	—
			—	—	—	—	19 (0.7)	19 (0.7)	19 (0.7)
			—	—	—	—	—	—	19 (0.7)
			—	—	—	—	—	—	—
W1	mm (in)	150 (5.9)	150 (5.9)	181 (7.1)	181 (7.1)	—	156 (6.1)	177 (7.0)	172 (6.8)
W2	mm (in)	213 (8.4)	213 (8.4)	222 (8.7)	222 (8.7)	188 (7.4)	188 (7.4)	—	189 (7.4)
W3	mm (in)	145 (5.7)	145 (5.7)	—	—	156 (6.1)	156 (6.1)	156 (6.1)	156 (6.1)
W4	mm (in)	145 (5.7)	145 (5.7)	153 (6.0)	153 (6.0)	156 (6.1)	156 (6.1)	156 (6.1)	156 (6.1)
W5	mm (in)	262 (10.3)	262 (10.3)	325 (12.8)	325 (12.8)	284 (11.2)	284 (11.2)	284 (11.2)	284 (11.2)
W6	mm (in)	417 (16.4)	417 (16.4)	425 (16.7)	425 (16.7)	562 (22.1)	562 (22.1)	—	603 (23.7)
A1	degree	360	360	90	90	43	43	43	43
A2	degree	79	79	69	69	71	71	71	71
A3	degree	8	8	—	—	4	4	4	4
T1	mm (in)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model) Symbol		FT9.9LEHP (T9.9PHB)	FT8GE FT9.9LE (T9.9EB)	FT8GEP FT9.9LEP (T9.9PB)	F9.9HMH F15CMH (F15MHA) F15CEH (F15EHA) F15CWH F20BMH (F20MHA) F20BEH (F20EHA) F20BWH F20CMH	F15CEHP (F15PHA) F20BEPH (F20PHA)	F9.9HE F15CE F20BE (F20EA) F20CE	F15CEP F20BEP (F20PA)	F25DMH (F25MHA) F25DEH (F25EHA) F25DWH
L1	mm (in)	435 (17.1)	436 (17.2)	435 (17.1)	489 (19.3)	488 (19.2)	489 (19.3)	488 (19.2)	601 (23.7)
L2	mm (in)	122 (4.8)	121 (4.8)	122 (4.8)	219 (8.6)	220 (8.7)	176 (6.9)	176 (6.9)	—
L3	mm (in)	608 (23.9)	—	—	559 (22.0)	559 (22.0)	—	—	580 (22.8)
L4	mm (in)	367 (14.4)	367 (14.4)	367 (14.4)	387 (15.2)	386 (15.2)	387 (15.2)	386 (15.2)	433 (17.0)
L5	S L X U	mm (in)	—	—	64 (2.5)	—	64 (2.5)	89 (3.5)	85 (3.3)
			35 (1.4)	67 (2.6)	35 (1.4)	82 (3.2)	82 (3.2)	82 (3.2)	103 (4.1)
			35 (1.4)	67 (2.6)	35 (1.4)	—	—	—	115 (4.5)
			—	—	—	—	—	—	—
L6	S L X U	mm (in)	—	—	730 (28.7)	—	730 (28.7)	727 (28.6)	761 (30.0)
			879 (34.6)	880 (34.6)	879 (34.6)	847 (33.3)	840 (33.1)	847 (33.3)	840 (33.1)
			941 (37.0)	943 (37.1)	941 (37.0)	—	—	—	960 (37.8)
			—	—	—	—	—	—	—
L7	mm (in)	273 (10.7)	276 (10.9)	273 (10.7)	381 (15.0)	356 (14.0)	321 (12.6)	309 (12.2)	378 (14.9)
L8	mm (in)	139 (5.5)	138 (5.4)	139 (5.5)	237 (9.3)	176 (6.9)	184 (7.2)	188 (7.4)	189 (7.4)
L9	S L X U	mm (in)	—	—	9 (0.4)	—	9 (0.4)	18 (0.7)	15 (0.6)
			62 (2.4)	27 (1.1)	62 (2.4)	18 (0.7)	18 (0.7)	18 (0.7)	6 (0.2)
			62 (2.4)	27 (1.1)	—	—	—	—	1 (0.05)
			—	—	—	—	—	—	—
L10	mm (in)	67 (2.6)	66 (2.6)	67 (2.6)	66 (2.6)	67 (2.6)	66 (2.6)	67 (2.6)	65 (2.6)
H1	S L X U	mm (in)	—	—	701 (27.6)	—	701 (27.6)	706 (27.8)	707 (27.8)
			869 (34.2)	864 (34.0)	869 (34.2)	828 (32.6)	833 (32.8)	828 (32.6)	833 (32.8)
			937 (36.9)	932 (36.7)	937 (36.9)	—	—	—	920 (36.2)
			—	—	—	—	—	—	—
H2	mm (in)	326 (12.8)	331 (13.0)	326 (12.8)	377 (14.8)	372 (14.6)	377 (14.8)	372 (14.6)	450 (17.7)
H3	mm (in)	157 (6.2)	157 (6.2)	157 (6.2)	133 (5.2)	133 (5.2)	133 (5.2)	133 (5.2)	144 (5.7)
H4	S L X U	mm (in)	—	—	438 (17.2)	—	438 (17.2)	443 (17.4)	423 (16.7)
			557 (21.9)	552 (21.7)	557 (21.9)	565 (22.2)	570 (22.4)	565 (22.2)	570 (22.4)
			625 (24.6)	620 (24.4)	625 (24.6)	—	—	—	635 (25.0)
			—	—	—	—	—	—	—
H5	mm (in)	673 (26.5)	—	—	570 (22.4)	566 (22.3)	—	—	—
H6	S L X U	mm (in)	—	—	616 (24.3)	—	616 (24.3)	574 (22.6)	667 (26.3)
			717 (28.2)	730 (28.7)	717 (28.2)	694 (27.3)	643 (25.3)	694 (27.3)	748 (29.4)
			757 (29.8)	771 (30.4)	757 (29.8)	—	—	—	803 (31.6)
			—	—	—	—	—	—	—
H7	mm (in)	213 (8.4)	216 (8.5)	273 (10.7)	399 (15.7)	414 (16.3)	218 (8.6)	230 (9.1)	258 (10.2)
H8	mm (in)	5 (0.2)	8 (0.3)	5 (0.2)	44 (1.7)	37 (1.5)	32 (1.3)	28 (1.1)	41 (1.6)
H9	mm (in)	604 (23.8)	527 (20.7)	522 (20.6)	580 (22.8)	575 (22.6)	580 (22.8)	575 (22.6)	705 (27.8)
H10	mm (in)	32 (1.3)	37 (1.5)	32 (1.3)	37 (1.5)	32 (1.3)	37 (1.5)	32 (1.3)	43 (1.7)
H11	S L X U	mm (in)	—	—	19 (0.7)	—	19 (0.7)	19 (0.7)	23 (0.9)
			33 (1.3)	19 (0.7)	33 (1.3)	19 (0.7)	19 (0.7)	19 (0.7)	22 (0.9)
			33 (1.3)	19 (0.7)	33 (1.3)	—	—	—	22 (0.9)
			—	—	—	—	—	—	—
W1	mm (in)	172 (6.8)	177 (7.0)	177 (7.0)	210 (8.3)	210 (8.3)	210 (8.3)	210 (8.3)	199 (7.8)
W2	mm (in)	189 (7.4)	—	—	210 (8.3)	210 (8.3)	—	—	213 (8.4)
W3	mm (in)	156 (6.1)	156 (6.1)	156 (6.1)	176 (6.9)	176 (6.9)	180 (7.1)	180 (7.1)	—
W4	mm (in)	156 (6.1)	156 (6.1)	156 (6.1)	—	—	—	—	—
W5	mm (in)	265 (10.4)	284 (11.2)	265 (10.4)	341 (13.4)	320 (12.6)	341 (13.4)	320 (12.6)	387 (15.2)
W6	mm (in)	567 (22.3)	—	—	598 (23.5)	568 (22.4)	—	—	604 (23.8)
A1	degree	38	43	38	45	40	45	40	42
A2	degree	74	71	74	71	67	71	S:63 / L:67	73
A3	degree	8	4	8	4	4	4	S:0 / L:4	4
T1	mm (in)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Symbol		F25DMHD (F25MHB) F25DEHD (F25EHB) F25DWHD	F25DEHT	F25DEH w/6X4 tiller handle	F25DE (F25EA)	F25DET (F25A)	F20GMH (F20MHB) F20GWH (F20WHB) F25GMH (F25MHC) F25GWH (F25WHC)	F20GE (F20WB) F25GW (F25WC)	F25GET (F25C)
L1	mm (in)	601 (23.7)	601 (23.7)	601 (23.7)	601 (23.7)	601 (23.7)	495 (19.5)	495 (19.5)	511 (20.1)
L2	mm (in)	—	—	255 (10.0)	123 (4.8)	123 (4.8)	—	138 (5.4)	122 (4.8)
L3	mm (in)	580 (22.8)	580 (22.8)	769 (30.3)	—	—	635 (25.0)	—	—
L4	mm (in)	433 (17.0)	433 (17.0)	433 (17.0)	433 (17.0)	433 (17.0)	414 (16.3)	414 (16.3)	422 (16.6)
L5	S	mm (in)	—	—	103 (4.1)	—	34 (1.3)	34 (1.3)	—
	L		111 (4.4)	111 (4.4)	103 (4.1)	103 (4.1)	111 (4.4)	85 (3.4)	85 (3.4)
	X		124 (4.9)	124 (4.9)	—	—	—	—	—
	U		—	—	—	—	—	—	—
L6	S	mm (in)	—	—	880 (34.6)	—	750 (29.5)	750 (29.5)	—
	L		875 (34.4)	875 (34.4)	880 (34.6)	880 (34.6)	875 (34.4)	868 (34.2)	868 (34.2)
	X		951 (37.4)	951 (37.4)	—	—	—	—	—
	U		—	—	—	—	—	—	—
L7	mm (in)	353 (13.9)	353 (13.9)	378 (14.9)	378 (14.9)	353 (13.9)	344 (13.5)	344 (13.5)	318 (12.5)
L8	mm (in)	197 (7.8)	197 (7.8)	159 (6.3)	147 (5.8)	150 (5.9)	202 (8.0)	137 (5.4)	128 (5.0)
L9	S	mm (in)	—	—	6 (0.2)	—	34 (1.3)	34 (1.3)	—
	L		14 (0.6)	14 (0.6)	—	6 (0.2)	14 (0.6)	14 (0.6)	3.0 (0.1)
	X		10 (0.4)	10 (0.4)	—	—	—	—	—
	U		—	—	—	—	—	—	—
L10	mm (in)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	66 (2.6)	66 (2.6)	65 (2.6)
H1	S	mm (in)	—	—	834 (32.8)	—	707 (27.8)	707 (27.8)	—
	L		834 (32.8)	834 (32.8)	834 (32.8)	834 (32.8)	834 (32.8)	834 (32.8)	838 (33.0)
	X		920 (36.2)	920 (36.2)	—	—	—	—	—
	U		—	—	—	—	—	—	—
H2	mm (in)	450 (17.7)	450 (17.7)	450 (17.7)	450 (17.7)	450 (17.7)	399 (15.7)	399 (15.7)	395 (15.6)
H3	mm (in)	144 (5.7)	144 (5.7)	144 (5.7)	144 (5.7)	144 (5.7)	146 (5.8)	146 (5.8)	146 (5.8)
H4	S	mm (in)	—	—	423 (16.7)	—	424 (16.7)	424 (16.7)	—
	L		550 (21.7)	550 (21.7)	550 (21.7)	550 (21.7)	550 (21.7)	551 (21.7)	551 (21.7)
	X		636 (25.0)	636 (25.0)	—	—	—	—	—
	U		—	—	—	—	—	—	—
H5	mm (in)	—	—	766 (30.2)	—	—	625 (24.6)	—	—
H6	S	mm (in)	—	—	748 (29.4)	—	629 (24.8)	629 (24.8)	—
	L		665 (26.2)	665 (26.2)	748 (29.4)	748 (29.4)	665 (26.2)	708 (27.9)	708 (27.9)
	X		711 (28.0)	711 (28.0)	—	—	—	—	—
	U		—	—	—	—	—	—	—
H7	mm (in)	282 (11.1)	282 (11.1)	258 (10.2)	258 (10.2)	282 (11.1)	199 (7.8)	199 (7.8)	234 (9.2)
H8	mm (in)	26 (1.0)	26 (1.0)	47 (1.9)	12 (0.5)	22 (0.9)	39 (1.5)	11 (0.4)	10 (0.4)
H9	mm (in)	706 (27.8)	706 (27.8)	705 (27.8)	705 (27.8)	706 (27.8)	591 (23.3)	591 (23.3)	607 (23.9)
H10	mm (in)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	37 (1.5)	37 (1.5)	42 (1.7)
H11	S	mm (in)	—	—	22 (0.9)	—	21 (0.8)	21 (0.8)	—
	L		18 (0.7)	18 (0.7)	22 (0.9)	22 (0.9)	18 (0.7)	20 (0.8)	16 (0.6)
	X		17 (0.7)	17 (0.7)	—	—	—	—	—
	U		—	—	—	—	—	—	—
W1	mm (in)	199 (7.8)	199 (7.8)	199 (7.8)	199 (7.8)	199 (7.8)	189 (7.4)	189 (7.4)	189 (7.4)
W2	mm (in)	213 (8.4)	213 (8.4)	128 (5.0)	—	213 (8.4)	143 (5.6)	—	—
W3	mm (in)	—	—	—	—	—	—	—	—
W4	mm (in)	—	—	—	—	—	—	—	—
W5	mm (in)	387 (15.2)	387 (15.2)	387 (15.2)	387 (15.2)	387 (15.2)	352 (13.9)	352 (13.9)	352 (13.9)
W6	mm (in)	604 (23.8)	604 (23.8)	665 (26.2)	—	604 (23.8)	595 (23.4)	—	—
A1	degree	42	42	42	42	42	45	45	45
A2	degree	66	66	73	73	66	71	71	66
A3	degree	3	3	4	4	3	4	4	3
T1	mm (in)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model) Symbol		F20GEP (F20WPB)	F20GWHP (F20WPHB)	FT25FET (T25A)	F30BEHT F40FEHT	F30BEHD (F30EHA) F40FEHD (F40EHA)	F30BET (F30A) F40FET (F40A)	F40FED (F40EA)	F40HET F50HET (F50B) F60FET (F60B)
L1	mm (in)	495 (19.5)	495 (19.5)	601 (23.7)	583 (23.0)	583 (23.0)	583 (23.0)	583 (23.0)	584 (23.0)
L2	mm (in)	138 (5.4)	—	134 (5.3)	235 (9.3)	235 (9.3)	134 (5.3)	134 (5.3)	122 (4.8)
L3	mm (in)	—	635 (25.0)	—	779 (30.7)	779 (30.7)	—	—	—
L4	mm (in)	S:413 (16.3) L:414 (16.3)	414 (16.3)	522 (20.6)	522 (20.6)	522 (20.6)	522 (20.6)	522 (20.6)	533 (21.0)
L5	S L X U	mm (in)	91 (3.6)	—	—	77 (3.0)	77 (3.0)	77 (3.0)	—
			85 (3.3)	85 (3.3)	66 (2.6)	66 (2.6)	66 (2.6)	66 (2.6)	97 (3.8)
			—	—	66 (2.6)	—	66 (2.6)	—	121 (4.8)
L6	S L X U	mm (in)	750 (29.5)	—	—	816 (32.1)	817 (32.2)	816 (32.1)	—
			863 (34.0)	863 (34.0)	924 (36.4)	925 (36.4)	923 (36.3)	924 (36.4)	923 (36.3)
			—	—	1025 (40.4)	—	1024 (40.3)	1025 (40.4)	1036 (40.8)
			—	—	—	—	—	—	—
L7	mm (in)	333 (13.1)	333 (13.1)	338 (13.3)	345 (13.6)	342 (13.5)	345 (13.6)	342 (13.5)	417 (16.4)
L8	mm (in)	141 (5.6)	203 (8.0)	158 (6.2)	177 (7.0)	178 (7.0)	158 (6.2)	158 (6.2)	147 (5.8)
L9	S L X U	mm (in)	—	—	—	29 (1.1)	29 (1.1)	29 (1.1)	—
			14 (0.6)	14 (0.6)	29 (1.1)	29 (1.1)	29 (1.1)	29 (1.1)	0 (0.0)
			—	—	29 (1.1)	—	29 (1.1)	—	0 (0.0)
			—	—	—	—	—	—	—
L10	mm (in)	66 (2.6)	66 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	65 (2.6)	62 (2.4)
H1	S L X U	mm (in)	712 (28.0)	—	—	757 (29.8)	757 (29.8)	757 (29.8)	—
			839 (33.0)	839 (33.0)	879 (34.6)	879 (34.6)	879 (34.6)	879 (34.6)	870 (34.3)
			—	—	993 (39.1)	—	993 (39.1)	993 (39.1)	984 (38.7)
			—	—	—	—	—	—	—
H2	mm (in)	394 (15.5)	394 (15.5)	433 (17.0)	471 (18.5)	471 (18.5)	471 (18.5)	471 (18.5)	545 (21.5)
H3	mm (in)	146 (5.8)	146 (5.8)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)
H4	S L X U	mm (in)	429 (16.9)	—	—	414 (16.3)	414 (16.3)	414 (16.3)	—
			556 (21.9)	556 (21.9)	536 (21.1)	536 (21.1)	536 (21.1)	536 (21.1)	527 (20.7)
			—	—	650 (25.6)	—	650 (25.6)	650 (25.6)	641 (25.2)
			—	—	—	—	—	—	—
H5	mm (in)	—	—	—	770 (30.3)	770 (30.3)	—	—	—
H6	S L X U	mm (in)	586 (23.1)	—	—	594 (23.4)	606 (23.9)	594 (23.4)	—
			657 (25.9)	657 (25.9)	667 (26.3)	660 (26.0)	667 (26.3)	660 (26.0)	708 (27.9)
			—	—	728 (28.7)	—	728 (28.7)	—	774 (30.5)
			—	—	—	—	—	—	—
H7	mm (in)	209 (8.2)	—	274 (10.8)	306 (12.0)	304 (12.0)	306 (12.0)	304 (12.0)	354 (13.9)
H8	mm (in)	11 (0.4)	44 (1.7)	14 (0.6)	44 (1.7)	43 (1.7)	14 (0.6)	15 (0.6)	22 (0.9)
H9	mm (in)	586 (23.1)	586 (23.1)	698 (27.5)	695 (27.4)	695 (27.4)	695 (27.4)	695 (27.4)	759 (29.9)
H10	mm (in)	32 (1.3)	32 (1.3)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	43 (1.7)	49 (1.9)
H11	S L X U	mm (in)	—	—	—	19 (0.7)	19 (0.7)	19 (0.7)	—
			20 (0.8)	20 (0.8)	19 (0.7)	19 (0.7)	19 (0.7)	19 (0.7)	24 (0.9)
			—	—	19 (0.7)	—	19 (0.7)	—	24 (0.9)
			—	—	—	—	—	—	—
W1	mm (in)	189 (7.4)	189 (7.4)	199 (7.8)	192 (7.6)	192 (7.6)	192 (7.6)	192 (7.6)	192 (7.6)
W2	mm (in)	—	143 (5.6)	—	128 (5.0)	128 (5.0)	—	—	—
W3	mm (in)	—	—	—	—	—	—	—	—
W4	mm (in)	—	—	—	—	—	—	—	—
W5	mm (in)	352 (13.9)	352 (13.9)	376 (14.8)	364 (14.3)	364 (14.3)	364 (14.3)	364 (14.3)	360 (14.2)
W6	mm (in)	—	595 (23.4)	—	654 (25.7)	654 (25.7)	—	—	—
A1	degree	45	45	40	40	40	40	40	40
A2	degree	S:63 L:67	67	66	66	65	66	65	69
A3	degree	4	4	3	3	3	3	3	4
T1	mm (in)	—	—	—	—	—	—	—	560 (22.0)

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model)		F40JMHD	F50HED	F50DET	F50HEHD	F50HEHT (F50HB) F60FEHT (F60HB)	FT50JET (T50B) FT60GET (T60B)	FT50CET	FT60GEHT	
Symbol										
L1	mm (in)	572 (22.5)	584 (23.0)	576 (22.7)	584 (23.0)	584 (23.0)	584 (23.0)	576 (22.7)	584 (23.0)	
L2	mm (in)	297 (11.7)	122 (4.8)	142 (5.6)	225 (8.9)	225 (8.9)	122 (4.8)	142 (5.6)	225 (8.9)	
L3	mm (in)	669 (26.3)	—	—	788 (31.0)	788 (31.0)	—	—	788 (31.0)	
L4	mm (in)	522 (20.6)	533 (21.0)	532 (20.9)	533 (21.0)	533 (21.0)	561 (22.1)	560 (22.1)	561 (22.1)	
L5	S	mm (in)	—	—	—	—	—	—	—	
	L		66 (2.6)	97 (3.8)	97 (3.8)	97 (3.8)	98 (3.9)	98 (3.9)	98 (3.9)	
	X		—	—	—	—	114 (4.5)	85 (3.4)	—	
	U		—	—	—	—	—	—	—	
L6	S	mm (in)	—	—	—	—	—	—	—	
	L		923 (36.3)	930 (36.6)	933 (36.7)	930 (36.6)	932 (36.7)	996 (39.2)	991 (39.0)	996 (39.2)
	X		—	—	—	—	1099 (43.3)	1095 (43.1)	—	
	U		—	—	—	—	—	—	—	
L7	mm (in)	397 (15.6)	406 (16.0)	407 (16.0)	406 (16.0)	417 (16.4)	417 (16.4)	407 (16.0)	417 (16.4)	
L8	mm (in)	297 (11.7)	148 (5.8)	148 (5.8)	168 (6.6)	165 (6.5)	147 (5.8)	148 (5.8)	165 (6.5)	
L9	S	mm (in)	—	—	—	—	—	—	—	
	L		29 (1.1)	0 (0.0)	0.6 (0.02)	0 (0.0)	0 (0.0)	0 (0.04)	0 (0.0)	
	X		—	—	—	0 (0.0)	0 (0.0)	16.0 (0.63)	0 (0.0)	
	U		—	—	—	—	—	—	—	
L10	mm (in)	65 (2.6)	62 (2.4)	63 (2.5)	62 (2.4)	62 (2.4)	62 (2.4)	63 (2.5)	62 (2.4)	
H1	S	mm (in)	—	—	—	—	—	—	—	
	L		879 (34.6)	870 (34.3)	876 (34.5)	870 (34.3)	870 (34.3)	910 (35.8)	917 (36.1)	910 (35.8)
	X		—	—	—	—	1024 (40.3)	1026 (40.4)	—	
	U		—	—	—	—	—	—	—	
H2	mm (in)	493 (19.4)	545 (21.5)	519 (20.4)	545 (21.5)	545 (21.5)	545 (21.5)	519 (20.4)	545 (21.5)	
H3	mm (in)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	191 (7.5)	194 (7.6)	191 (7.5)	
H4	S	mm (in)	—	—	—	—	—	—	—	
	L		536 (21.1)	527 (20.7)	533 (21.0)	527 (20.7)	527 (20.7)	530 (20.9)	536 (21.1)	530 (20.9)
	X		—	—	—	—	644 (25.4)	645 (25.4)	—	
	U		—	—	—	—	—	—	—	
H5	mm (in)	550 (21.7)	—	—	790 (31.1)	790 (31.1)	—	—	790 (31.1)	
H6	S	mm (in)	—	—	—	—	—	—	—	
	L		660 (26.0)	682 (26.9)	711 (28.0)	682 (26.9)	708 (27.9)	746 (29.4)	750 (29.5)	746 (29.4)
	X		—	—	—	—	812 (32.0)	813 (32.0)	—	
	U		—	—	—	—	—	—	—	
H7	mm (in)	209 (8.2)	354 (13.9)	327 (12.9)	354 (13.9)	354 (13.9)	354 (13.9)	327 (12.9)	354 (13.9)	
H8	mm (in)	94 (3.7)	25 (1.0)	3.5 (0.14)	33 (1.3)	37 (1.5)	22 (0.9)	3.5 (0.14)	37 (1.5)	
H9	mm (in)	728 (28.7)	762 (30.0)	733 (28.9)	713 (28.1)	759 (29.9)	759 (29.9)	733 (28.9)	759 (29.9)	
H10	mm (in)	43 (1.7)	49 (1.9)	44 (1.7)	49 (1.9)	49 (1.9)	49 (1.9)	44 (1.7)	49 (1.9)	
H11	S	mm (in)	—	—	—	—	—	—	—	
	L		19 (0.7)	24 (0.9)	24 (0.9)	24 (0.9)	24 (0.9)	28 (1.1)	24 (0.9)	
	X		—	—	—	—	24 (0.9)	27 (1.0)	—	
	U		—	—	—	—	—	—	—	
W1	mm (in)	189 (7.4)	192 (7.6)	181 (7.1)	192 (7.6)	192 (7.6)	192 (7.6)	181 (7.1)	192 (7.6)	
W2	mm (in)	162 (6.4)	—	—	137 (5.4)	137 (5.4)	—	—	137 (5.4)	
W3	mm (in)	—	—	181 (7.1)	—	—	—	181 (7.1)	—	
W4	mm (in)	—	—	—	—	—	—	—	—	
W5	mm (in)	358 (14.1)	360 (14.2)	345 (13.6)	360 (14.2)	360 (14.2)	360 (14.2)	345 (13.6)	360 (14.2)	
W6	mm (in)	612 (24.1)	—	—	672 (26.5)	672 (26.5)	—	—	672 (26.5)	
A1	degree	40	40	40	40	40	40	40	40	
A2	degree	65	67	65	67	69	69	65	69	
A3	degree	3	4	4	4	4	4	4	4	
T1	mm (in)	—	560 (22.0)	560 (22.0)	—	—	560 (22.0)	560 (22.0)	—	

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model) Symbol		FT50CEHD	FT60GEHD	F70AET (F70A) F40GET	F70AET (F70A) F40GET w/6X4 tiller handle	F80BET F90BET F100DET	F80BET F90BET F100DET w/6X4 tiller handle	F75DET (F75B) F80DET (F80B) F90CET (F90B) F90DET (VF90A) F100FET (F100B)	F75DET (F75B) F75FET F80DET (F80B) F90CET (F90B) F90DET (VF90A) F100FET (F100B) F100GET w/6X4 tiller handle
L1	mm (in)	576 (22.7)	584 (23.0)	591 (23.3)	591 (23.3)	651 (25.6)	651 (25.6)	683 (26.9)	683 (26.9)
L2	mm (in)	272 (10.7)	225 (8.9)	122 (4.8)	225 (8.9)	171 (6.7)	247 (9.7)	120 (4.7)	300 (11.8)
L3	mm (in)	797 (31.2)	778 (30.6)	—	788 (31.0)	—	822 (32.4)	—	864 (34.0)
L4	mm (in)	560 (22.1)	561 (22.1)	582 (22.9)	582 (22.9)	574 (22.6)	574 (22.6)	631 (24.8)	631 (24.8)
L5	S	mm (in)	—	—	—	—	—	—	—
	L		98 (3.9)	67 (2.6)	67 (2.6)	67 (2.6)	63 (2.5)	63 (2.5)	63 (2.5)
	X		85.0 (3.35)	98 (3.9)	67 (2.6)	67 (2.6)	63 (2.5)	63 (2.5)	81 (3.2)
	U		—	—	—	—	—	—	—
L6	S	mm (in)	—	—	—	—	—	—	—
	L		989 (38.9)	995 (39.2)	1000 (39.4)	1000 (39.4)	998 (39.3)	998 (39.3)	1006 (39.6)
	X		1092 (43.0)	1097 (43.2)	1103 (43.4)	1103 (43.4)	1115 (43.9)	1115 (43.9)	1122 (44.2)
	U		—	—	—	—	—	—	—
L7	mm (in)	397 (15.6)	407 (16.0)	421 (16.6)	421 (16.6)	527 (20.7)	527 (20.7)	544 (21.4)	544 (21.4)
L8	mm (in)	189 (7.2)	168 (6.6)	152 (6.0)	165 (6.5)	164 (6.5)	108 (4.3)	135 (5.3)	121 (4.8)
L9	S	mm (in)	—	—	—	—	—	—	—
	L		0.8 (0.03)	0 (0.0)	26 (1.0)	26 (1.0)	28 (1.1)	28 (1.1)	32 (1.3)
	X		16 (0.63)	0 (0.0)	26 (1.0)	26 (1.0)	28 (1.1)	28 (1.1)	41 (1.6)
	U		—	—	—	—	—	—	—
L10	mm (in)	63 (2.5)	62 (2.4)	62 (2.4)	62 (2.4)	62 (2.4)	62 (2.4)	75 (3.0)	75 (3.0)
H1	S	mm (in)	—	—	—	—	—	—	—
	L		917 (36.1)	910 (35.8)	915 (36.0)	915 (36.0)	917 (36.1)	917 (36.1)	929 (36.6)
	X		1026 (40.4)	1025 (40.4)	1029 (40.5)	1029 (40.5)	1044 (41.1)	1044 (41.1)	1056 (41.6)
	U		—	—	—	—	—	—	—
H2	mm (in)	519 (20.4)	545 (21.5)	561 (22.1)	561 (22.1)	666 (26.2)	666 (26.2)	693 (27.3)	693 (27.3)
H3	mm (in)	194 (7.6)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)
H4	S	mm (in)	—	—	—	—	—	—	—
	L		533 (21.0)	530 (20.9)	534 (21.0)	534 (21.0)	536 (21.1)	536 (21.1)	516 (20.3)
	X		645 (25.4)	644 (25.4)	648 (25.5)	648 (25.5)	663 (26.1)	663 (26.1)	643 (25.3)
	U		—	—	—	—	—	—	—
H5	mm (in)	680 (26.8)	790 (31.1)	—	790 (31.1)	—	784 (30.9)	—	782 (30.8)
H6	S	mm (in)	—	—	—	—	—	—	—
	L		723 (28.5)	720 (28.3)	749 (29.5)	749 (29.5)	766 (30.2)	766 (30.2)	764 (30.1)
	X		783 (30.8)	782 (30.8)	815 (32.1)	815 (32.1)	842 (33.1)	842 (33.1)	840 (33.1)
	U		—	—	—	—	—	—	—
H7	mm (in)	330 (13.0)	354 (13.9)	371 (14.6)	371 (14.6)	366 (14.4)	366 (14.4)	476 (18.7)	476 (18.7)
H8	mm (in)	110 (4.3)	34 (1.3)	26 (1.0)	37 (1.5)	27 (1.1)	49 (1.9)	15 (0.6)	53 (2.1)
H9	mm (in)	738 (29.1)	763 (30.0)	741 (29.2)	741 (29.2)	857 (33.7)	857 (33.7)	878 (34.6)	878 (34.6)
H10	mm (in)	44 (1.7)	49 (1.9)	49 (1.9)	49 (1.9)	49 (1.9)	49 (1.9)	45 (1.8)	45 (1.8)
H11	S	mm (in)	—	—	—	—	—	—	—
	L		28 (1.1)	29 (1.1)	29 (1.1)	29 (1.1)	25 (1.0)	25 (1.0)	31 (1.2)
	X		27 (1.0)	24 (0.9)	29 (1.1)	29 (1.1)	24 (0.9)	24 (0.9)	31 (1.2)
	U		—	—	—	—	—	—	—
W1	mm (in)	181 (7.1)	192 (7.6)	193 (7.6)	193 (7.6)	240 (9.4)	240 (9.4)	244 (9.6)	244 (9.6)
W2	mm (in)	213 (8.4)	137 (5.4)	—	137 (5.4)	—	137 (5.4)	—	137 (5.4)
W3	mm (in)	181 (7.13)	—	—	—	—	—	—	—
W4	mm (in)	—	—	—	—	—	—	—	—
W5	mm (in)	345 (13.6)	360 (14.2)	363 (14.3)	363 (14.3)	405 (15.9)	405 (15.9)	411 (16.2)	411 (16.2)
W6	mm (in)	738 (29.1)	672 (26.5)	—	676 (26.6)	—	633 (24.9)	—	665 (26.2)
A1	degree	40	40	40	40	35	35	35	35
A2	degree	63	67	65	65	70	70	70	70
A3	degree	4	4	4	4	4	4	4	4
T1	mm (in)	—	—	560 (22.0)	—	660 (26.0)	—	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model) Symbol		F75CED	F75CEHD F100BEHT F100BEHD	F100BET	F/FL115BET (F/LF115B) F115CET (VF115A) F125AET F130AET (F130A)	F115BEHT	F/FL150DET (F/LF150B) F/FL150FET	F150CET (VF150LA) F165AET F175BET (VF175LA) F185AET L-transom	F150CET (VF150XA) X-transom
L1	mm (in)	664 (26.1)	664 (26.1)	664 (26.1)	690 (27.2)	690 (27.2)	722 (28.4)	722 (28.4)	722 (28.4)
L2	mm (in)	161 (6.3)	324 (12.8)	161 (6.3)	136 (5.4)	300 (11.8)	198 (7.8)	198 (7.8)	198 (7.8)
L3	mm (in)	—	844 (33.2)	—	—	—	—	—	—
L4	mm (in)	631 (24.8)	631 (24.8)	631 (24.8)	631 (24.8)	631 (24.8)	646 (25.4)	646 (25.4)	646 (25.4)
L5	S L X U	mm (in)	—	—	—	—	—	—	—
			79 (3.1)	79 (3.1)	69 (2.7)	63 (2.5)	63 (2.5)	60 (2.4)	53 (2.1)
			87 (3.4)	87 (3.4)	76 (3.0)	81 (3.2)	81 (3.2)	80 (3.2)	63 (2.5)
			—	—	—	—	—	—	—
L6	S L X U	mm (in)	—	—	—	—	—	—	—
			1005 (39.6)	1005 (39.6)	1005 (39.6)	1006 (39.6)	1006 (39.6)	1032 (40.6)	1033 (40.7)
			1118 (44.0)	1118 (44.0)	1122 (44.2)	1122 (44.2)	1122 (44.2)	1148 (45.2)	1149 (45.2)
			—	—	—	—	—	—	—
L7	mm (in)	504 (19.8)	504 (19.8)	536 (21.9)	561 (22.1)	561 (22.1)	639 (25.2)	639 (25.2)	639 (25.2)
L8	mm (in)	168 (6.6)	208 (8.2)	158 (6.2)	135 (5.3)	121 (4.8)	163 (6.4)	163 (6.4)	163 (6.4)
L9	S L X U	mm (in)	—	—	—	—	—	—	—
			19 (0.7)	19 (0.7)	25 (1.0)	32 (1.3)	32 (1.3)	35 (1.4)	42 (1.7)
			15 (0.6)	15 (0.6)	25 (1.0)	41 (1.6)	41 (1.6)	43 (1.7)	51 (2.0)
			—	—	—	—	—	—	—
L10	mm (in)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)
H1	S L X U	mm (in)	—	—	—	—	—	—	—
			929 (36.6)	929 (36.6)	929 (36.6)	929 (36.6)	929 (36.6)	946 (37.2)	946 (37.2)
			1056 (41.6)	1056 (41.6)	1056 (41.6)	1056 (41.6)	1056 (41.6)	1073 (42.2)	1073 (42.2)
			—	—	—	—	—	—	—
H2	mm (in)	667 (26.3)	667 (26.3)	666 (26.2)	700 (27.6)	700 (27.6)	796 (31.3)	796 (31.3)	796 (31.3)
H3	mm (in)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	210 (8.3)	210 (8.3)	210 (8.3)
H4	S L X U	mm (in)	—	—	—	—	—	—	—
			516 (20.3)	516 (20.3)	516 (20.3)	516 (20.3)	516 (20.3)	516 (20.3)	516 (20.3)
			643 (25.3)	643 (25.3)	643 (25.3)	643 (25.3)	643 (25.3)	—	643 (25.3)
			—	—	—	—	—	—	—
H5	mm (in)	—	764 (30.1)	—	—	782 (30.8)	—	—	—
H6	S L X U	mm (in)	—	—	—	—	—	—	—
			709 (27.9)	709 (27.9)	776 (30.6)	764 (30.1)	764 (30.1)	787 (31.0)	774 (30.5)
			776 (30.6)	776 (30.6)	854 (33.6)	840 (33.1)	840 (33.1)	864 (34.0)	849 (33.4)
			—	—	—	—	—	—	—
H7	mm (in)	401 (15.8)	401 (15.8)	388 (15.3)	429 (16.9)	429 (16.9)	501 (19.7)	501 (19.7)	501 (19.7)
H8	mm (in)	4 (0.2)	93 (3.7)	14 (0.6)	15 (0.6)	53 (2.1)	14 (0.6)	14 (0.6)	14 (0.6)
H9	mm (in)	892 (35.1)	892 (35.1)	877 (34.5)	877 (34.5)	877 (34.5)	928 (36.5)	928 (36.5)	928 (36.5)
H10	mm (in)	44 (1.7)	44 (1.7)	44 (1.7)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)
H11	S L X U	mm (in)	—	—	—	—	—	—	—
			17 (0.7)	17 (0.7)	25 (1.0)	31 (1.2)	31 (1.2)	27 (1.1)	33 (1.3)
			17 (0.7)	17 (0.7)	25 (1.0)	31 (1.2)	31 (1.2)	27 (1.1)	32 (1.3)
			—	—	—	—	—	—	—
W1	mm (in)	243 (9.6)	243 (9.6)	243 (9.6)	262 (10.3)	262 (10.3)	256 (10.1)	274 (10.8)	274 (10.8)
W2	mm (in)	—	96 (3.8)	—	—	137 (5.4)	—	—	—
W3	mm (in)	—	—	—	—	—	—	—	—
W4	mm (in)	—	—	—	—	—	—	—	—
W5	mm (in)	384 (15.1)	384 (15.1)	384 (15.1)	422 (16.6)	422 (16.6)	433 (17.1)	425 (16.7)	425 (16.7)
W6	mm (in)	—	578 (22.8)	—	—	665 (26.2)	—	—	—
A1	degree	30	30	30	35	35	35	32	32
A2	degree	64	64	70	66	66	70	66	66
A3	degree	3	3	4	4	4	4	4	4
T1	mm (in)	660 (26.0)	—	660 (26.0)	660 (26.0)	660 (26.0)	660 (26.0)	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model)		F/FL150GET (F/LF150CA)	F/FL200CET (F/LF200A)	F200DET (VF200LA)	F225DET (VF225LA)	F250DET (VF250LA)	F250JETX (VF250XA)	F/FL225HET (F/LF225B)	F/FL300D	F/FL225FET (F/LF225CA)	F/FL250DET (F/LF250CA)	F/FL300BET (F/LF300CA)	F/FL350AET (F/LF350CC)
Symbol		F/FL175CET (F/LF175CA)	F/FL225BET (F/LF225A)	F225LET (VF225LA)	F250CET (VF250LA)	F225GET (VF200LA)	X-transom	F/FL225HET (F/LF225B)					
F175AET (F175A)		F/FL250AET (F/LF250A)	F/FL200BET (F/LF200B)	F250LET (VF250LA)	F200HET (VF200XA)	F/FL250LET (F/LF250B)	L-transom	F/FL250LET (F/LF250B)					
F/FL200GET (F/LF200CA)		F/FL250HET		F250FET		F/FL300CET (F/LF300A)							
L1		mm (in)	722 (28.4)	651 (25.6)	741 (29.2)	729 (28.7)	728 (28.7)	728 (28.7)	728 (28.7)	776 (30.6)			
L2		mm (in)	198 (7.8)	219 (8.6)	218 (8.6)	230 (9.1)	230 (9.1)	230 (9.1)	230 (9.1)	255 (10.0)			
L3		mm (in)	—	—	—	—	—	—	—	—			
L4		mm (in)	646 (25.4)	673 (26.5)	688 (27.1)	673 (26.5)	673 (26.5)	709 (28.0)	673 (26.5)	732 (28.8)			
L5	S	mm (in)	—	—	—	—	—	—	—	—			
	L		53 (2.1)	—	54 (2.1)	—	—	—	—	—			
	X		63 (2.5)	59 (2.3)	—	59 (2.3)	59 (2.3)	42 (1.7)	59 (2.3)	48.4 (1.9)			
	U		—	59 (2.3)	—	—	—	59 (2.3)	59 (2.3)	48.4 (1.9)			
L6	S	mm (in)	—	—	—	—	—	—	—	—			
	L		1033 (40.7)	—	1033 (40.7)	—	—	—	—	—			
	X		1149 (45.2)	1115 (45.5)	—	1155 (45.5)	1155 (45.5)	1183 (46.6)	1155 (45.5)	1193 (47.0)			
	U		—	1272 (50.1)	—	—	—	1300 (51.2)	1272 (50.1)	1310 (51.6)			
L7		mm (in)	639 (25.2)	619 (24.4)	651 (25.6)	662 (26.1)	639 (25.2)	639 (25.2)	639 (25.2)	712 (28.0)			
L8		mm (in)	163 (6.4)	230 (9.1)	237 (9.3)	240 (9.4)	240 (9.4)	240 (9.4)	240 (9.4)	258 (10.2)			
L9	S	mm (in)	—	—	—	—	—	—	—	—			
	L		42 (1.7)	—	81 (3.2)	—	—	—	—	—			
	X		51 (2.0)	52 (2.0)	—	53 (2.1)	53 (2.1)	80 (3.2)	53 (2.1)	56 (2.2)			
	U		—	59 (2.3)	—	—	—	86 (3.4)	59 (2.3)	62 (2.4)			
L10		mm (in)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	75 (3.0)	73 (2.9)			
H1	S	mm (in)	—	—	—	—	—	—	—	—			
	L		946 (37.2)	—	932 (36.7)	—	—	—	—	—			
	X		1073 (42.2)	1078 (42.4)	—	1078 (42.4)	1078 (42.4)	1103 (43.4)	1078 (42.4)	1098 (43.2)			
	U		—	1205 (47.4)	—	—	—	1230 (48.4)	1205 (47.4)	1225 (48.2)			
H2		mm (in)	796 (31.3)	752 (29.6)	817 (32.2)	815 (32.1)	812 (32.0)	812 (32.0)	812 (32.0)	909 (35.8)			
H3		mm (in)	210 (8.3)	216 (8.5)	216 (8.5)	216 (8.5)	216 (8.5)	230 (9.1)	216 (8.5)	229 (9.0)			
H4	S	mm (in)	—	—	—	—	—	—	—	—			
	L		516 (20.3)	—	493 (19.4)	—	—	—	—	—			
	X		643 (25.3)	643 (25.3)	—	—	643 (25.3)	642 (25.3)	643 (25.3)	637 (25.1)			
	U		—	770 (30.3)	—	—	—	769 (30.3)	770 (30.3)	764 (30.1)			
H5		mm (in)	—	—	—	—	—	—	—	—			
H6	S	mm (in)	—	—	—	—	—	—	—	—			
	L		774 (30.5)	—	715 (28.1)	—	—	—	—	—			
	X		849 (33.4)	847 (33.3)	—	847 (33.3)	847 (33.3)	845 (33.3)	847 (33.3)	864 (34.0)			
	U		—	924 (36.4)	—	—	—	924 (36.4)	924 (36.4)	941 (37.0)			
H7		mm (in)	501 (19.7)	387 (15.2)	507 (20.0)	500 (19.7)	510 (20.1)	510 (20.1)	510 (20.1)	588 (23.1)			
H8		mm (in)	14 (0.6)	39 (1.5)	33 (1.3)	48 (1.9)	48 (1.9)	48 (1.9)	48 (1.9)	65 (2.6)			
H9		mm (in)	928 (36.5)	902 (35.5)	1008 (39.7)	990 (39.0)	951 (37.4)	951 (37.4)	951 (37.4)	1041 (41.0)			
H10		mm (in)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	45 (1.8)	49 (1.9)			
H11	S	mm (in)	—	—	—	—	—	—	—	—			
	L		33 (1.3)	—	35 (1.4)	—	—	—	—	—			
	X		32 (1.3)	25 (1.0)	—	25 (1.0)	25 (1.0)	26 (1.0)	25 (1.0)	26 (1.0)			
	U		—	25 (1.0)	—	—	—	26 (1.0)	25 (1.0)	26 (1.0)			
W1		mm (in)	274 (10.8)	317 (12.5)	332 (13.1)	332 (13.1)	317 (12.5)	317 (12.5)	317 (12.5)	317 (12.5)			
W2		mm (in)	—	—	—	—	—	—	—	—			
W3		mm (in)	—	—	—	—	—	—	—	—			
W4		mm (in)	—	—	—	—	—	—	—	—			
W5		mm (in)	425 (16.7)	453 (17.8)	496 (19.5)	483 (19.0)	454 (17.9)	454 (17.9)	454 (17.9)	476 (18.7)			
W6		mm (in)	—	—	—	—	—	—	—	—			
A1		degree	32	32	35	32	32	32	32	32			
A2		degree	66	70	66	70	70	70	67	70			
A3		degree	4	3	4	3	3	3	3	3			
T1		mm (in)	660 (26.0)	724 (28.5)	—	—	724 (28.5)	724 (28.5)	724 (28.5)	724 (28.5)			

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (4-STROKE)**

Global model (Unified model)		F/FL375AST (XF375SA)	F/FL300FST (F/LF300SB)	F/FL300GET (F/LF300CB)
Symbol		F/FL425AST (XF425SA)	F/FL250NST (F/LF250SB)	F/FL250PET (F/LF250CB)
L1	mm (in)	1019 (40.1)	835.0 (32.87)	775.0 (30.51)
L2	mm (in)	198 (7.8)	191.0 (7.52)	251.0 (9.88)
L3	mm (in)	—	—	—
L4	mm (in)	861 (33.9)	733.0 (28.86)	673.0 (25.08)
L5	S L X U E	mm (in)	—	
			—	
			33 (1.3)	84.0 (3.31)
			33 (1.3)	19.0 (0.75)
			33 (1.3)	
L6	S L X U E	mm (in)	—	—
			—	—
			1291 (50.8)	1253.0 (49.33)
			1412 (55.6)	1370.0 (53.94)
			1533 (60.4)	1487.0 (58.5)
L7	mm (in)	708 (27.9)	620.0 (24.41)	658.0 (25.91)
L8	mm (in)	295 (11.6)	216.0 (8.50)	249.0 (9.80)
L9	S L X U E	mm (in)	—	—
			—	—
			66 (2.6)	17.0 (0.67)
			66 (2.6)	83.0 (3.27)
			66 (2.6)	20.0 (0.79)
L10	mm (in)	47 (1.9)	36.0 (1.42)	95.0 (3.74)
H1	S L X U E	mm (in)	—	—
			—	—
			1100 (43.3)	1075.0 (42.32)
			1227 (48.3)	1202.0 (47.32)
			1354 (53.3)	1329.0 (52.32)
H2	mm (in)	959 (37.8)	889.0 (35.00)	815.0 (32.09)
H3	mm (in)	230 (9.1)	216.0 (8.50)	216.0 (8.50)
H4	S L X U E	mm (in)	—	—
			—	—
			640 (25.2)	640.0 (25.20)
			767 (30.2)	767.0 (30.20)
			894 (35.2)	894.0 (30.20)
H5	mm (in)	—	—	—
H6	S L X U E	mm (in)	—	—
			—	—
			991 (39.0)	893.0 (35.16)
			1079 (42.5)	969.0 (38.15)
			1167 (45.9)	1045.0 (41.14)
H7	mm (in)	720 (28.3)	583.0 (22.95)	500.0 (19.69)
H8	mm (in)	36 (1.4)	22.0 (0.87)	65.0 (2.56)
H9	mm (in)	1286 (50.6)	1112.0 (43.78)	1026.0 (40.39)
H10	mm (in)	101 (4.0)	104.0 (4.09)	45.0 (1.77)
H11	S L X U E	mm (in)	—	
			—	
			42 (1.7)	19.0 (0.75)
			42 (1.7)	25.0 (0.98)
			41 (1.6)	
W1	mm (in)	326 (12.8)	317.0 (12.48)	317.0 (12.48)
W2	mm (in)	—	—	—
W3	mm (in)	—	—	—
W4	mm (in)	—	—	—
W5	mm (in)	554 (21.8)	486.0 (19.13)	486.0 (19.13)
W6	mm (in)	—	—	—
A1	degree	31	32	32
A2	degree	77	69	70
A3	degree	4	-3	-3
T1	mm (in)	723.9 (28.5)	724.0 (28.50)	724.0 (28.50)

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (2-STROKE)**

Global model (Unified model)		2DMH	3BMH	4CMH	4DMH	E8DMH EK8DMH	8FMH	15FMH	E9.9DMH E15DMH EK9.9DMH EK15DMH EK9.9JMH EK15PMH	
Symbol										
L1	mm (in)	277 (10.9)	310 (12.2)	344 (13.5)	344 (13.5)	346 (13.6)	363 (14.3)	393 (15.5)	405 (15.9)	
L2	mm (in)	129 (5.1)	105 (4.1)	145 (5.7)	145 (5.7)	180 (7.1)	114 (4.5)	180 (7.1)	165 (6.5)	
L3	mm (in)	332 (13.1)	316 (12.4)	333 (13.1)	333 (13.1)	372 (14.6)	439 (17.3)	479 (18.9)	473 (18.6)	
L4	mm (in)	164 (6.5)	218 (8.6)	252 (9.9)	252 (9.9)	268 (10.6)	359 (14.1)	355 (14.0)	357 (14.0)	
L5	S L Y X U	mm (in)	36 (1.4)	17.0 (0.7)	16 (0.6)	16 (0.6)	23 (0.9)	72 (2.8)	78 (3.1)	
			—	—	24 (0.9)	24 (0.9)	23 (0.9)	72 (2.8)	104 (4.1)	
			—	—	—	—	—	—	78 (3.1)	
			—	—	—	—	—	—	78 (3.1)	
			—	—	—	—	—	134 (5.3)	—	
L6	S L Y X U	mm (in)	592 (23.3)	634 (25.0)	635 (25.0)	635 (25.0)	657 (25.9)	704 (27.7)	718 (28.3)	708 (27.9)
			—	—	758 (29.8)	758 (29.8)	782 (30.8)	826 (32.5)	831 (32.7)	821 (32.3)
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	947 (37.3)	
			—	—	—	—	—	—	—	
L7	mm (in)	281 (11.1)	316 (12.4)	331 (13.0)	331 (13.0)	354 (13.9)	286 (11.3)	314 (12.4)	334 (13.1)	
L8	mm (in)	142 (5.6)	156 (6.1)	148 (5.8)	148 (5.8)	207 (8.1)	153 (6.0)	263 (10.4)	165 (6.5)	
L9	S L Y X U	mm (in)	—	—	—	—	—	65 (2.6)	—	
			—	—	—	—	—	65 (2.6)	—	
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	14 (0.5)	
			—	—	—	—	—	—	—	
L10	mm (in)	50 (2.0)	69 (2.7)	68 (2.7)	68 (2.7)	45 (1.8)	—	75 (3.0)	73 (2.9)	
H1	S L Y X U	mm (in)	616 (24.3)	652 (25.7)	653 (25.7)	653 (25.7)	685 (27.0)	681 (26.8)	705 (27.8)	706 (27.8)
			—	—	780 (30.7)	780 (30.7)	825 (32.5)	808 (31.8)	832 (32.8)	833 (32.8)
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	975 (38.4)	
			—	—	—	—	—	—	—	
H2	mm (in)	304 (12.0)	347 (13.7)	358 (14.1)	325 (12.8)	359 (14.1)	295 (11.6)	335 (13.2)	356 (14.0)	
H3	mm (in)	100 (3.9)	103 (4.1)	105 (4.1)	105 (4.1)	122 (4.8)	123 (4.8)	135 (5.3)	34 (1.4)	
H4	S L Y X U	mm (in)	419 (16.5)	440 (17.3)	444 (17.5)	444 (17.5)	442 (17.4)	435 (17.1)	440 (17.3)	441 (17.4)
			—	—	571 (22.5)	571 (22.5)	582 (22.9)	562 (22.1)	567 (22.3)	568 (22.4)
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	710 (27.9)	
			—	—	—	—	—	—	—	
H5	mm (in)	455 (17.9)	485 (19.1)	396 (15.6)	396 (15.6)	415 (16.3)	462 (18.2)	467 (18.4)	474 (18.7)	
H6	S L Y X U	mm (in)	506 (19.9)	620 (24.4)	623 (24.5)	623 (24.5)	497 (19.6)	668 (26.3)	572 (22.5)	569 (22.4)
			—	—	719 (28.3)	719 (28.3)	574 (22.6)	758 (29.8)	641 (25.2)	638 (25.2)
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	714 (28.1)	
			—	—	—	—	—	—	—	
H7	mm (in)	32 (1.3)	342 (13.5)	104 (4.1)	104 (4.1)	86 (3.4)	109 (4.3)	138 (5.4)	—	
H8	mm (in)	15 (0.6)	15 (0.6)	30 (1.2)	30 (1.2)	51 (2.0)	3 (0.1)	19 (0.7)	24 (0.9)	
H9	mm (in)	398 (15.7)	422 (16.6)	459 (18.1)	459 (18.1)	465 (18.3)	470 (18.5)	526 (20.7)	555 (21.9)	
H10	mm (in)	28 (1.1)	30 (1.2)	30 (1.2)	30 (1.2)	26 (1.0)	32 (1.3)	34 (1.3)	34 (1.3)	
H11	S L Y X U	mm (in)	—	—	—	—	—	34 (1.3)	—	
			—	—	—	—	—	33 (1.3)	—	
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	—	
			—	—	—	—	—	—	—	
W1	mm (in)	—	109 (4.3)	144 (5.7)	144 (5.7)	136 (5.4)	150 (5.9)	143 (5.6)	173 (6.8)	
W2	mm (in)	154 (6.1)	190 (7.5)	178 (7.0)	178 (7.0)	192 (7.6)	192 (7.6)	189 (7.4)	—	
W3	mm (in)	90 (3.5)	105 (4.1)	134 (5.3)	134 (5.3)	129 (5.1)	136 (5.4)	143 (5.6)	—	
W4	mm (in)	—	—	—	—	158 (6.2)	163 (6.4)	—	185 (7.3)	
W5	mm (in)	—	—	—	—	—	283 (11.1)	280 (11.0)	280 (11.0)	
W6	mm (in)	—	—	—	—	—	551 (21.7)	497 (19.6)	493 (19.4)	
A1	degree	360	360	360	360	360	60	45(P)/40(S)	40	
A2	degree	69	76	76	76	80	81	63	63	
A3	degree	—	—	—	—	—	8	—	4	
T1	mm (in)	—	—	—	—	—	—	—	—	

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (2-STROKE)**

Global model (Unified model)		E/25BMH 25BWC 25XMH E/30HMH 30HWH 30HWC EK25BMH EK25CMH	25BW 30HW	E40GWH E40GMH EK40GMH	E40JMH E40JWH EK40JMH	E40JW	E/40XMH E40XWH	E/40XW	E/40XWT
Symbol									
L1	mm (in)	429 (16.9)	429 (16.9)	504 (19.8)	504 (19.8)	504 (19.8)	553 (21.8)	553 (21.8)	553 (21.8)
L2	mm (in)	180 (7.1)	180 (7.09)	188 (7.4)	188 (7.4)	188 (7.4)	118 (4.6)	118 (4.6)	118 (4.6)
L3	mm (in)	420 (16.5)	—	493 (19.4)	493 (19.4)	—	523 (20.6)	—	—
L4	mm (in)	385 (15.2)	385 (15.2)	421 (16.6)	421 (16.6)	478 (18.8)	522 (20.6)	522 (20.6)	522 (20.6)
L5	S L Y X U	mm (in)	61 (2.4)	—	94 (3.7)	94 (3.7)	—	65 (2.6)	65 (2.6)
			83 (3.3)	83 (3.3)	94 (3.7)	94 (3.7)	94 (3.7)	91 (3.6)	91 (3.6)
			—	—	94 (3.7)	—	—	—	—
			83 (3.3)	—	—	—	91 (3.6)	—	—
			—	—	—	—	—	—	—
L6	S L Y X U	mm (in)	736 (29.0)	—	784 (30.9)	784 (30.9)	—	826 (32.5)	826 (32.5)
			854 (33.6)	854 (33.6)	897 (35.3)	897 (35.3)	910 (35.8)	940 (37.0)	940 (37.0)
			—	—	943 (37.1)	—	—	—	—
			933 (36.7)	—	—	—	1043 (41.1)	—	935 (36.8)
			—	—	—	—	—	—	—
L7	mm (in)	405 (16.0)	405 (15.9)	427 (16.8)	427 (16.8)	427 (16.8)	397 (15.6)	397 (15.6)	391 (15.4)
L8	mm (in)	195 (7.7)	195 (7.7)	193 (7.6)	193 (7.6)	193 (7.6)	294 (11.6)	—	—
L9	S L Y X U	mm (in)	—	—	—	—	3 (0.1)	3 (0.1)	—
			—	—	—	—	8 (0.3)	8 (0.3)	8 (0.3)
			—	—	—	—	—	—	—
			—	—	—	—	16 (0.6)	—	8 (0.3)
			—	—	—	—	—	—	—
L10	mm (in)	74.2 (2.9)	74.2 (2.9)	72 (2.8)	72 (2.8)	72 (2.8)	65 (2.6)	65 (2.6)	65 (2.6)
H1	S L Y X U	mm (in)	707 (27.8)	—	771 (30.4)	771 (30.4)	—	767 (30.2)	767 (30.2)
			834 (32.8)	834 (32.8)	898 (35.4)	898 (35.4)	891 (35.1)	893 (35.2)	893 (35.2)
			—	—	948 (37.3)	—	—	—	—
			920 (36.2)	—	—	—	1007 (39.6)	—	893 (35.2)
			—	—	—	—	—	—	—
H2	mm (in)	439 (17.3)	439 (17.3)	444 (17.5)	444 (17.5)	444 (17.5)	471 (18.5)	471 (18.5)	471 (18.5)
H3	mm (in)	144 (5.7)	144 (5.7)	162 (6.4)	162 (6.4)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)
H4	S L Y X U	mm (in)	423 (16.6)	—	444 (17.5)	444 (17.5)	—	424 (16.7)	424 (16.7)
			550 (21.6)	550 (21.6)	570 (22.4)	570 (22.4)	548 (21.6)	550 (21.7)	550 (21.7)
			—	—	622 (24.5)	—	—	—	—
			636 (25.0)	—	—	—	664 (26.1)	—	550 (21.7)
			—	—	—	—	—	—	—
H5	mm (in)	466 (18.3)	—	533 (21.0)	533 (21.0)	533 (21.0)	—	—	532 (20.9)
H6	S L Y X U	mm (in)	621 (24.4)	—	622 (24.5)	622 (24.5)	—	626 (24.6)	626 (24.6)
			701 (27.6)	701 (27.6)	691 (27.2)	691 (27.2)	683 (26.9)	697 (27.4)	697 (27.4)
			—	—	719 (28.3)	—	—	—	—
			754 (29.7)	—	—	—	761 (30.0)	—	637 (25.1)
			—	—	—	—	—	—	—
H7	mm (in)	118 (4.6)	118 (4.65)	127 (5.0)	127 (5.0)	127 (5.0)	159 (6.3)	159 (6.3)	176 (6.9)
H8	mm (in)	30 (1.2)	30 (1.2)	30 (1.2)	30 (1.2)	30 (1.2)	38 (1.5)	—	—
H9	mm (in)	596 (23.5)	596 (23.5)	695 (27.4)	695 (27.4)	695 (27.4)	702 (27.6)	702 (27.6)	706 (27.8)
H10	mm (in)	40 (1.6)	40.3 (1.6)	45 (1.8)	45 (1.8)	45 (1.8)	43 (1.7)	43 (1.7)	43 (1.7)
H11	S L Y X U	mm (in)	—	—	—	—	25 (1.0)	25 (1.0)	—
			—	—	—	—	24 (0.9)	24 (0.9)	24 (0.9)
			—	—	—	—	—	—	—
			—	—	—	—	24 (0.9)	—	24 (0.9)
			—	—	—	—	—	—	—
W1	mm (in)	166 (6.5)	166 (6.54)	190 (7.5)	190 (7.5)	190 (7.5)	182 (7.2)	182 (7.2)	182 (7.2)
W2	mm (in)	233 (9.2)	—	294 (11.6)	294 (11.6)	—	220.5 (8.7)	—	—
W3	mm (in)	148 (5.8)	148 (5.83)	173 (6.8)	173 (6.8)	173 (6.8)	182 (7.2)	182 (7.2)	182 (7.2)
W4	mm (in)	192 (7.6)	192 (7.56)	205 (8.1)	205 (8.1)	205 (8.1)	—	—	—
W5	mm (in)	302 (11.9)	302 (11.89)	360 (14.2)	360 (14.2)	360 (14.2)	369 (14.5)	369 (14.5)	369 (14.5)
W6	mm (in)	472 (18.6)	217 (8.54)	602 (23.7)	602 (23.7)	602 (23.7)	592 (23.3)	—	—
A1	degree	40	40	45	45	45	42	42	42
A2	degree	68	68	67	67	67	64	64	61
A3	degree	—	—	—	—	—	—	—	4
T1	mm (in)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (2-STROKE)**

Global model (Unified model)		40VMHO 50HMHO	40VEO	40VETO 50HETO	40VMHD 40VWHDO 40VWHTO 50HMHD 50HWHD 50HWHTO	E48CMH	55BED S-transom	55BED L-transom	55BET
Symbol									
L1	mm (in)	490 (19.3)	490 (19.3)	528 (20.8)	528 (20.8)	487 (19.2)	531 (20.9)	516 (20.3)	516 (20.3)
L2	mm (in)	257 (10.1)	178 (7.0)	142 (5.6)	221 (8.7)	298 (11.7)	159 (6.3)	174 (6.9)	174 (6.9)
L3	mm (in)	789 (31.1)	—	—	753 (29.6)	680 (26.8)	—	—	—
L4	mm (in)	493 (19.4)	493 (19.4)	529 (20.8)	529 (20.8)	487 (19.2)	531 (20.9)	516 (20.3)	516 (20.3)
L5	S L Y X U	mm (in)	—	—	—	54 (2.1)	87 (3.4)	—	—
			—	—	77 (3.0)	77 (3.0)	71 (2.8)	—	90 (3.5)
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
L6	S L Y X U	mm (in)	798 (31.4)	798 (31.4)	—	827 (32.6)	818 (32.2)	—	—
			910 (35.8)	910 (35.8)	937 (36.9)	937 (36.9)	932 (36.7)	—	919 (36.2)
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
L7	mm (in)	433 (17.0)	401 (15.8)	387 (15.2)	418 (16.5)	437 (17.2)	392 (15.4)	400 (15.7)	400 (15.7)
L8	mm (in)	273 (10.7)	179 (7.0)	153 (6.0)	246 (9.7)	280 (11.0)	154 (6.1)	164 (6.5)	164 (6.5)
L9	S L Y X U	mm (in)	—	—	—	—	—	—	—
			—	—	10 (0.4)	10 (0.4)	—	—	14 (0.6)
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
L10	mm (in)	72 (2.8)	72 (2.8)	63 (2.5)	63 (2.5)	77 (3.0)	67 (2.6)	67 (2.6)	67 (2.6)
H1	S L Y X U	mm (in)	751 (29.6)	751 (29.6)	—	809 (31.9)	758 (29.8)	—	—
			878 (34.6)	878 (34.6)	880 (34.6)	880 (34.6)	931 (36.7)	—	879 (34.6)
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
H2	mm (in)	472 (18.6)	441 (17.4)	439 (17.3)	470 (18.5)	449 (17.7)	424 (16.7)	424 (16.7)	424 (16.7)
H3	mm (in)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)
H4	S L Y X U	mm (in)	408 (16.1)	408 (16.1)	—	451 (17.8)	399 (15.7)	—	—
			535 (21.1)	535 (21.1)	537 (21.1)	537 (21.1)	572 (22.5)	—	520 (20.5)
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
H5	mm (in)	731 (28.8)	—	—	728 (28.7)	568 (22.4)	—	—	—
H6	S L Y X U	mm (in)	579 (22.8)	579 (22.8)	—	591 (23.3)	636 (25.0)	—	—
			646 (25.4)	646 (25.4)	709 (27.9)	709 (27.9)	652 (25.7)	—	689 (27.1)
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
H7	mm (in)	201 (7.9)	217 (8.5)	222 (8.7)	204 (8.0)	171 (6.7)	158 (6.2)	147 (5.8)	147 (5.8)
H8	mm (in)	55 (2.2)	17 (0.7)	0 (0.0)	43 (1.7)	93 (3.7)	12 (0.5)	25 (1.0)	25 (1.0)
H9	mm (in)	683 (26.9)	671 (26.4)	688 (27.1)	696 (27.4)	684 (26.9)	695 (27.4)	682 (26.9)	682 (26.9)
H10	mm (in)	44 (1.7)	44 (1.7)	44 (1.7)	44 (1.7)	42 (1.7)	47 (1.9)	47 (1.9)	47 (1.9)
H11	S L Y X U	mm (in)	—	—	20 (0.8)	—	22 (0.9)	24 (0.9)	24 (0.9)
			—	—	19 (0.7)	19 (0.7)	21 (0.8)	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
W1	mm (in)	—	180 (7.1)	180 (7.1)	180 (7.1)	—	166 (6.5)	166 (6.5)	166 (6.5)
W2	mm (in)	124 (4.9)	—	—	124 (4.9)	159 (6.3)	—	—	—
W3	mm (in)	175 (6.9)	175 (6.9)	175 (6.9)	175 (6.9)	165 (6.5)	—	—	166 (6.5)
W4	mm (in)	—	180 (7.1)	180 (7.1)	180 (7.1)	—	—	—	—
W5	mm (in)	340 (13.4)	340 (13.4)	340 (13.4)	340 (13.4)	268 (10.6)	271 (10.7)	271 (10.7)	271 (10.7)
W6	mm (in)	641 (25.2)	—	—	641 (25.2)	507 (20.0)	—	—	—
A1	degree	40	40	40	40	30	30	30	30
A2	degree	62	62	65	65	64	68	68	68
A3	degree	—	—	4	4	—	—	—	4
T1	mm (in)	—	—	—	—	—	—	—	—

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (2-STROKE)**

Symbol		E60HMHD E60HWHD	E60HWD	60FEDO S-transom	60FEDO L-transom	60FETO 70BETO S-transom	60FET 60FETO 70BETO L-transom	E55DEHD E75BEHD 85AEHD	E75BED 85AED
L1	mm (in)	532 (20.9)	532 (20.9)	547 (21.5)	532 (20.9)	547 (21.5)	532 (20.9)	545 (21.5)	545 (21.5)
L2	mm (in)	269 (10.6)	269 (10.6)	151 (5.9)	166 (6.5)	151 (5.9)	166 (6.5)	180 (7.1)	180 (7.1)
L3	mm (in)	651 (25.6)	651 (25.6)	—	—	—	—	790 (31.1)	—
L4	mm (in)	546 (21.5)	546 (21.5)	562 (22.1)	547 (21.5)	562 (22.1)	547 (21.5)	547 (21.5)	547 (21.5)
L5	S L Y X U	mm (in)	97 (3.8)	—	113 (4.4)	—	113 (4.4)	—	—
			99 (3.9)	99 (3.9)	—	91 (3.6)	—	91 (3.6)	88 (3.5)
			—	—	—	—	—	85 (3.3)	—
			—	—	—	—	—	85 (3.3)	80 (3.1)
			—	—	—	—	—	—	—
L6	S L Y X U	mm (in)	913 (35.9)	—	868 (34.2)	—	868 (34.2)	—	—
			1020 (40.2)	1020 (40.2)	—	968 (38.1)	—	968 (38.1)	968 (38.1)
			—	—	—	—	—	1015 (40.0)	—
			—	—	—	—	—	1080 (42.5)	1080 (42.5)
L7	mm (in)	457 (18.0)	457 (18.0)	403 (15.9)	411 (16.2)	403 (15.9)	411 (16.2)	459 (18.1)	459 (18.1)
L8	mm (in)	256 (10.1)	256 (10.1)	206 (8.1)	214 (8.4)	206 (8.1)	214 (8.4)	164 (6.5)	164 (6.5)
L9	S L Y X U	mm (in)	-6 (-0.2)	—	—	—	0.0 (0.0)	—	—
			4 (0.16)	—	—	—	14 (0.6)	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
L10	mm (in)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)	67 (2.6)
H1	S L Y X U	mm (in)	831 (32.7)	—	780 (30.7)	—	780 (30.7)	—	—
			954 (37.6)	954 (37.6)	—	901 (35.5)	—	901 (35.5)	901 (35.5)
			—	—	—	—	—	952 (37.5)	—
			—	—	—	—	—	1028 (40.5)	1028 (40.5)
H2	mm (in)	528 (20.8)	528 (20.8)	472 (18.6)	472 (18.6)	472 (18.6)	472 (18.6)	520 (20.5)	520 (20.5)
H3	mm (in)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)	191 (7.5)
H4	S L Y X U	mm (in)	450 (17.7)	—	400 (15.7)	—	400 (15.7)	—	—
			538 (21.2)	538 (21.2)	—	520 (20.5)	—	520 (20.5)	520 (20.5)
			—	—	—	—	—	571 (22.5)	—
			—	—	—	—	—	647 (25.5)	647 (25.5)
H5	mm (in)	753 (29.6)	753 (29.6)	—	—	—	—	—	—
H6	S L Y X U	mm (in)	670 (26.4)	—	645 (25.4)	—	645 (25.4)	—	—
			722 (28.4)	722 (28.4)	—	696 (27.4)	—	696 (27.4)	698 (27.5)
			—	—	—	—	—	729 (28.7)	—
			—	—	—	—	—	764 (30.1)	764 (30.1)
			—	—	—	—	—	—	—
H7	mm (in)	216 (8.5)	216 (8.5)	262 (10.3)	249 (9.8)	262 (10.3)	249 (9.8)	199 (7.8)	199 (7.8)
H8	mm (in)	81 (3.2)	81 (3.2)	- 24 (-0.9)	-11 (-0.4)	-24 (-0.9)	-11 (-0.4)	23 (0.9)	23 (0.9)
H9	mm (in)	722 (28.4)	722 (28.4)	719 (28.3)	706 (27.8)	719 (28.3)	706 (27.8)	743 (29.3)	743 (29.3)
H10	mm (in)	46 (1.8)	46 (1.8)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)	47 (1.9)
H11	S L Y X U	mm (in)	27 (1.1)	—	—	—	0 (0.0)	—	—
			27 (1.1)	27 (1.1)	—	—	28 (1.1)	—	—
			—	—	—	—	—	—	—
			—	—	—	—	—	—	—
W1	mm (in)	—	—	182 (7.2)	182 (7.2)	182 (7.2)	182 (7.2)	211 (8.3)	187 (7.4)
W2	mm (in)	159 (6.3)	—	—	—	—	—	—	—
W3	mm (in)	182 (7.2)	182 (7.2)	—	—	—	—	187 (7.4)	187 (7.4)
W4	mm (in)	—	—	—	—	—	—	—	—
W5	mm (in)	322 (12.7)	322 (12.7)	321 (12.6)	321 (12.6)	321 (12.6)	321 (12.6)	331 (13.0)	331 (13.0)
W6	mm (in)	553 (21.8)	—	—	—	—	—	—	—
A1	degree	35	35	35	35	35	35	30	30
A2	degree	67	67	63	67	63	67	67	67
A3	degree	2.8	2.8	0	4	0	4	—	—
T1	mm (in)	—	—	—	—	—	—	—	600 (23.6)

OUTBOARD MOTOR DIMENSIONS**OVERALL DIMENSIONS (2-STROKE)**

Symbol		85AET	E75BMHD	90AETO	E115AMH E115AWH	E115AE	E115AET	L/150AET L/200AET
L1	mm (in)	545 (21.5)	545 (21.5)	545 (21.5)	539 (21.2)	539 (21.2)	539 (21.2)	543 (21.4)
L2	mm (in)	180 (7.1)	270 (10.6)	180 (7.1)	325 (12.8)	213 (8.4)	213 (8.4)	188 (7.4)
L3	mm (in)	—	652 (25.7)	—	845 (33.3)	—	—	—
L4	mm (in)	547 (21.5)	547 (21.5)	547 (21.5)	616 (24.3)	616 (24.3)	616 (24.3)	634 (25.0)
L5	S L Y X U	mm (in)	—	—	—	—	—	—
			88 (3.5)	81 (3.2)	88 (3.5)	80 (3.1)	80 (3.1)	80 (3.1)
			—	80 (3.1)	—	75 (3.0)	—	—
			80 (3.1)	70 (2.8)	80 (3.1)	85 (3.3)	85 (3.3)	85 (3.3)
			—	—	—	—	—	—
L6	S L Y X U	mm (in)	—	—	—	—	—	—
			968 (38.1)	966 (38.0)	968 (38.1)	1005 (39.6)	1005 (39.6)	1005 (39.6)
			—	1011 (39.8)	—	1055 (41.5)	—	—
			1080 (42.5)	1078 (42.4)	1080 (42.5)	1120 (44.1)	1120 (44.1)	1144 (45.0)
L7	mm (in)	459 (18.1)	542 (21.3)	457 (18.0)	570 (22.4)	482 (19.0)	482 (19.0)	569 (22.4)
L8	mm (in)	164 (6.5)	256 (10.1)	164 (6.5)	270 (10.6)	214 (8.4)	215 (8.5)	173 (6.8)
L9	S L Y X U	mm (in)	—	—	—	—	—	—
			14 (0.6)	—	14 (0.6)	—	—	12 (0.5)
			—	—	—	—	—	—
			23 (0.9)	—	31 (1.2)	—	—	12 (0.5)
			—	—	—	—	—	—
L10	mm (in)	67 (2.6)	68 (2.7)	67 (2.6)	64 (2.5)	64 (2.5)	64 (2.5)	74 (2.9)
H1	S L Y X U	mm (in)	—	—	—	—	—	—
			901 (35.5)	902 (35.5)	901 (35.5)	929 (36.6)	929 (36.6)	929 (36.6)
			—	953 (37.5)	—	982 (38.7)	—	—
			1028 (40.5)	1028 (40.5)	1028 (40.5)	1056 (41.6)	1056 (41.6)	1056 (41.6)
H2	mm (in)	520 (20.5)	590 (23.2)	512 (20.2)	631 (24.8)	508 (20.0)	508 (20.0)	631 (24.8)
H3	mm (in)	191 (7.5)	191 (7.5)	191 (7.5)	190 (7.5)	190 (7.5)	190 (7.5)	210 (8.3)
H4	S L Y X U	mm (in)	—	—	—	—	—	—
			520 (20.5)	521 (20.5)	520 (20.5)	515 (20.3)	515 (20.3)	515 (20.3)
			—	572 (22.5)	—	568 (22.4)	—	—
			647 (25.5)	648 (25.5)	647 (25.5)	642 (25.3)	642 (25.3)	642 (25.3)
			—	—	—	—	—	—
H5	mm (in)	—	555 (21.9)	—	695 (27.4)	—	—	—
H6	S L Y X U	mm (in)	—	—	—	—	—	—
			698 (27.5)	698 (27.5)	698 (27.5)	735 (28.9)	735 (28.9)	762 (30.0)
			—	725 (28.5)	—	765 (30.1)	—	—
			764 (30.1)	766 (30.2)	764 (30.1)	810 (31.9)	810 (31.9)	837 (33.0)
H7	mm (in)	199 (7.8)	253 (10.0)	226 (8.9)	150 (5.9)	150 (5.9)	150 (5.9)	205 (8.1)
H8	mm (in)	23 (0.9)	84 (3.3)	23 (0.9)	155 (6.1)	53 (2.1)	55 (2.2)	26 (1.0)
H9	mm (in)	743 (29.3)	778 (30.6)	730 (28.7)	780 (30.7)	730 (28.7)	730 (28.7)	788 (31.0)
H10	mm (in)	47 (1.9)	46 (1.8)	47 (1.9)	45 (1.8)	45 (1.8)	45 (1.8)	45.4 (1.8)
H11	S L Y X U	mm (in)	—	—	—	—	—	—
			27 (1.1)	—	27 (1.1)	—	—	31 (1.2)
			—	—	—	—	—	—
			27 (1.1)	—	27 (1.1)	—	—	31 (1.2)
			—	—	—	—	—	—
W1	mm (in)	187 (7.4)	—	187 (7.4)	300 (11.8)	297 (11.7)	300 (11.8)	301 (11.9)
W2	mm (in)	—	159 (6.3)	—	210 (8.3)	—	—	—
W3	mm (in)	187 (7.4)	187 (7.4)	187 (7.4)	300 (11.8)	297 (11.7)	300 (11.8)	—
W4	mm (in)	—	—	—	300 (11.8)	—	—	—
W5	mm (in)	331 (13.0)	331 (13.0)	331 (13.0)	424 (16.7)	422 (16.6)	424 (16.7)	426 (16.8)
W6	mm (in)	—	506 (19.9)	—	705 (27.8)	—	—	—
A1	degree	30	30	30	35	35	35	35
A2	degree	67	67	67	66	66	70	70
A3	degree	4	—	4	—	—	4	4
T1	mm (in)	600 (23.6)	—	600 (23.6)	—	660 (26.0)	660 (26.0)	660 (26.0)

OUTBOARD MOTOR DIMENSIONS


CLAMP BRACKET DIMENSION ITEMS

Symbol	Definition and Description
B1	Horizontal dimension from centerline of motor body to lower bracket mounting hole (slot)
B2	Vertical dimension from transom top to lower bracket mounting hole (slot)
B3	Horizontal dimension from centerline of motor body to the center of upper bracket mounting hole
B4	Vertical dimension from transom top to the center of upper bracket mounting hole
B5	Horizontal dimension from centerline of motor body to the point of largest width on the bracket
B6	Vertical dimension from transom top to lowest point on the bracket
B7	Horizontal dimension from centerline of motor body to the center of lower extra bracket mounting hole
B8	Vertical dimension from transom top to the center of extra hole at the lower part of bracket
B9	Dimensions between the upper bracket mounting bolts (when holes are at even intervals)
B10	Dimensions between the upper bracket mounting bolts (when holes are not at even intervals)
B11	Horizontal dimensions from centerline of motor body to the clamping bolt center
B12	Vertical dimensions from transom top to the clamping bolt center
B13	Mount flange thickness of clamp bracket
B14	Mount flange thickness of clamp bracket
B15	Dimension from centerline of motor body to the inside of the clamp bracket
C1	Allowable transom board thickness when clamping screw is driven-in to the least extent
C2	Allowable transom board thickness when clamping screw is driven-in to the full extent
C3	Maximum allowable transom plate thickness for mounting the motor
D1	Diameter of bracket (main) lower mounting hole, or screw
D2	Diameter of bracket (main) mounting hole, or screw (lower mounting hole diameter, or, for slot, center-to-center distance of both end circles)
D3	Diameter of bracket mounting (sub) hole
D4	Diameter of central bracket mounting extra hole or the screw size
AN1	Vertical dimension from bottom of clamp bracket to the bottom end of anode
AN2	Horizontal dimension from centerline of motor (anode) to the point of largest width of anode

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F2B	F2.5B						
Unified model		F2.5B						
Manual tilt								

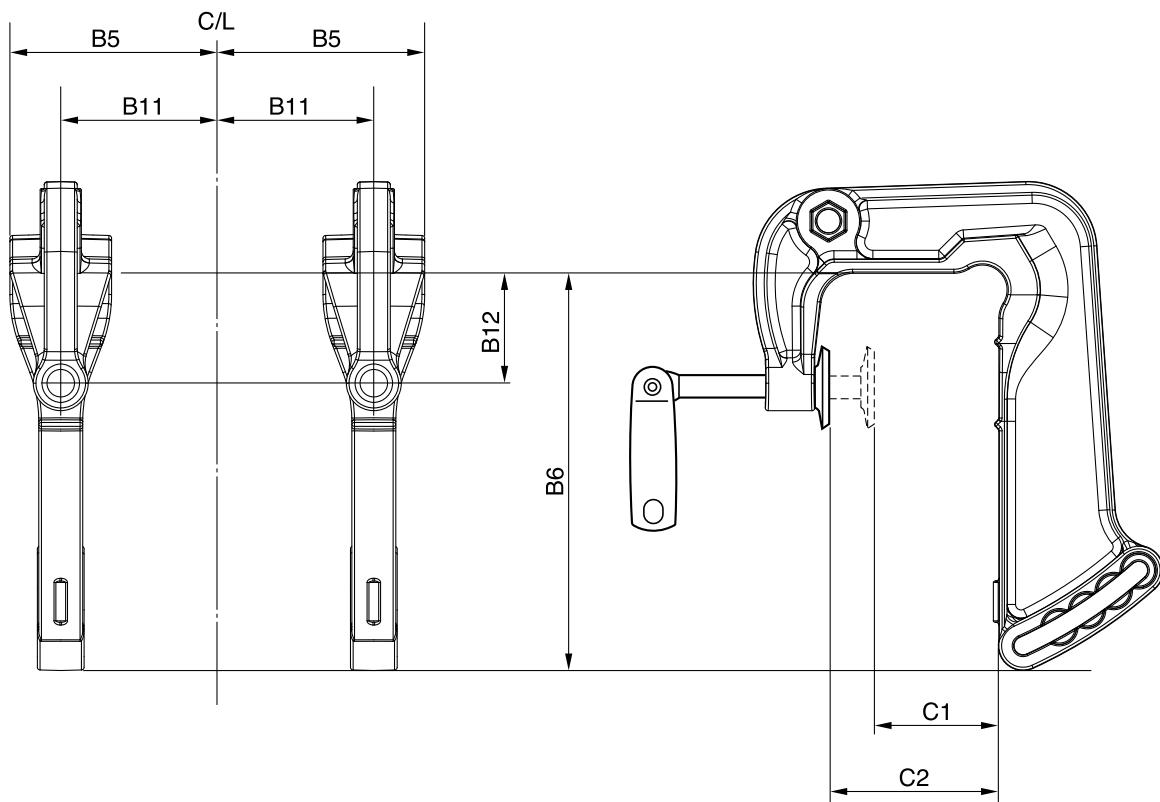


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	21 (0.9)	D1	—
B2	—	B9	—	C2	58 (2.3)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	54.5 (2.1)			D4	—
B5	73 (2.9)	B12	40 (1.6)				
B6	145 (5.7)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	2D							
Unified model								
Manual tilt								

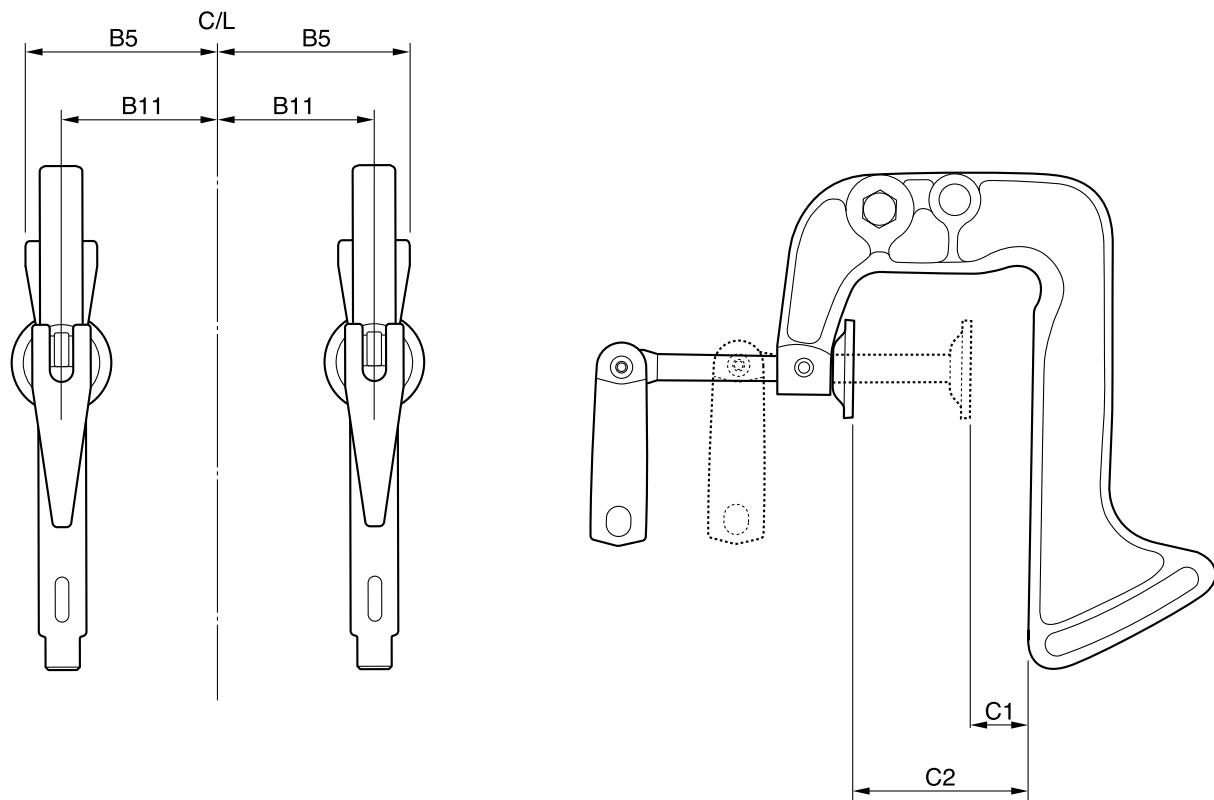


Symbol	mm (in.)						
B1	—	B8	—	C1	23 (0.9)	D1	—
B2	—	B9	—	C2	60 (2.4)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	40 (1.6)			D4	—
B5	52 (2.0)	B12	—				
B6	—						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	3B							
Unified model								
Manual tilt								

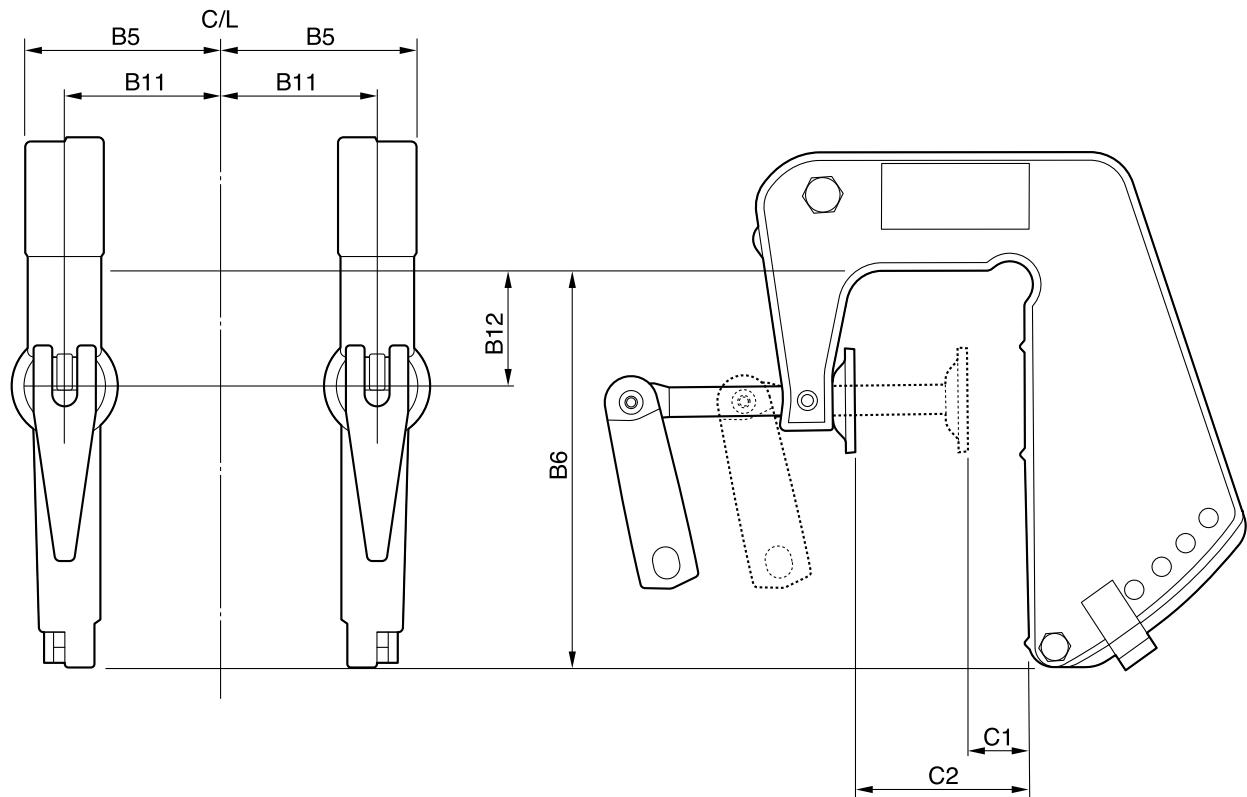


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	22 (0.9)	D1	—
B2	—	B9	—	C2	60 (2.4)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	57.1 (2.2)			D4	—
B5	70.6 (2.8)	B12	45 (1.8)				
B6	136 (5.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F4B	F5A	F6C	4C	4D			
Unified model	F4A		F6A					
Manual tilt								

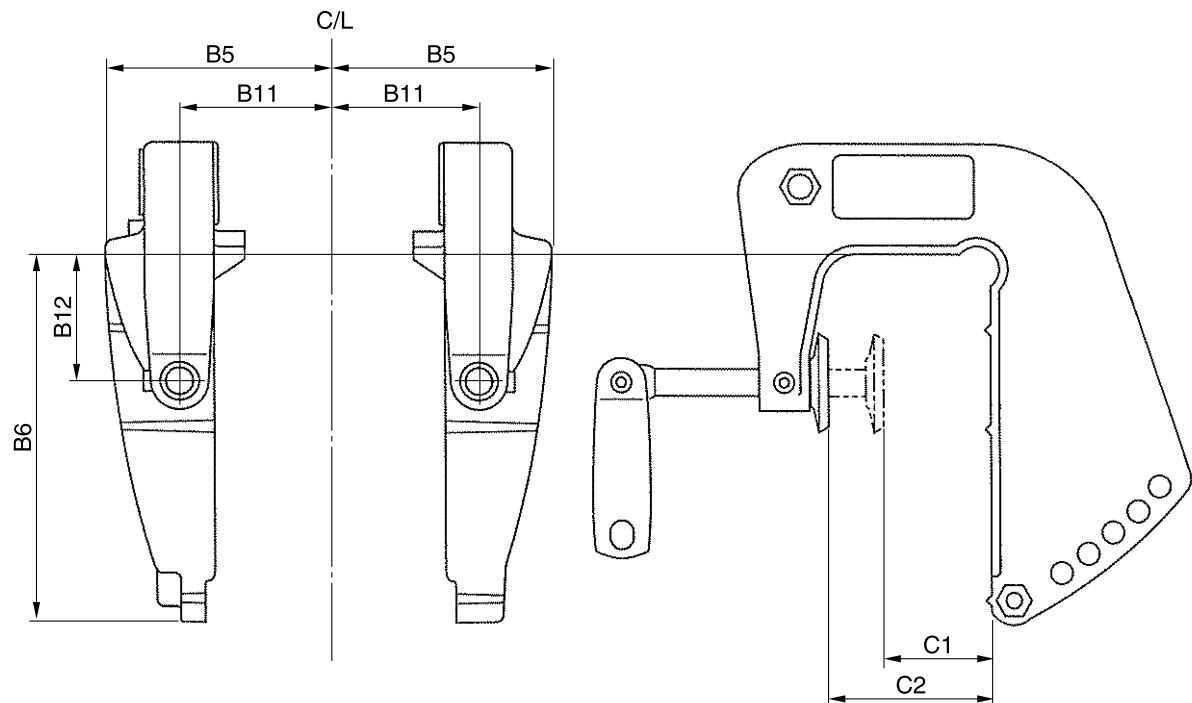


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	22 (0.9)	D1	—
B2	—	B9	—	C2	58 (2.3)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	55 (2.2)			D4	—
B5	83 (3.3)	B12	48 (1.9)				
B6	136 (5.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS


Global model	8F							
Unified model								
Manual tilt								

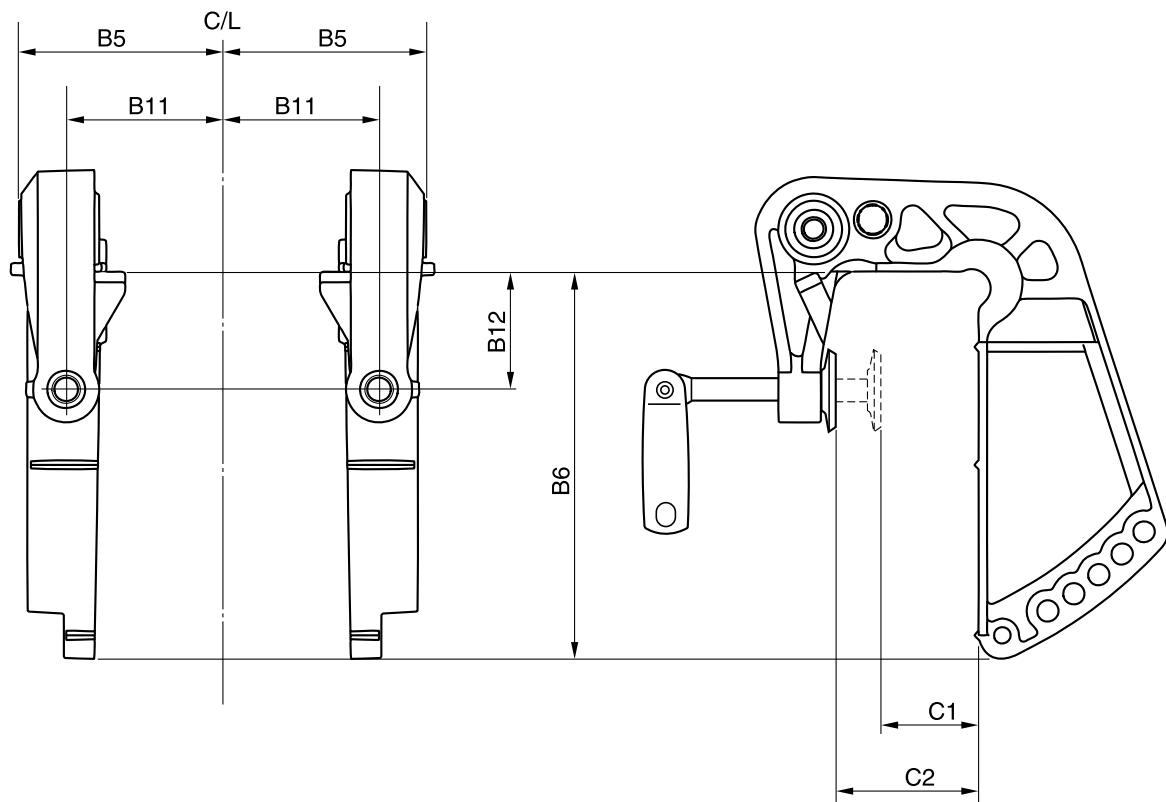

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	19 (0.8)	D1	—
B2	—	B9	—	C2	60 (2.4)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	62 (2.4)			D4	—
B5	81 (3.2)	B12	50 (2.0)				
B6	164 (6.5)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**

Global model	9.9F	15F						
Unified model								
Manual tilt								

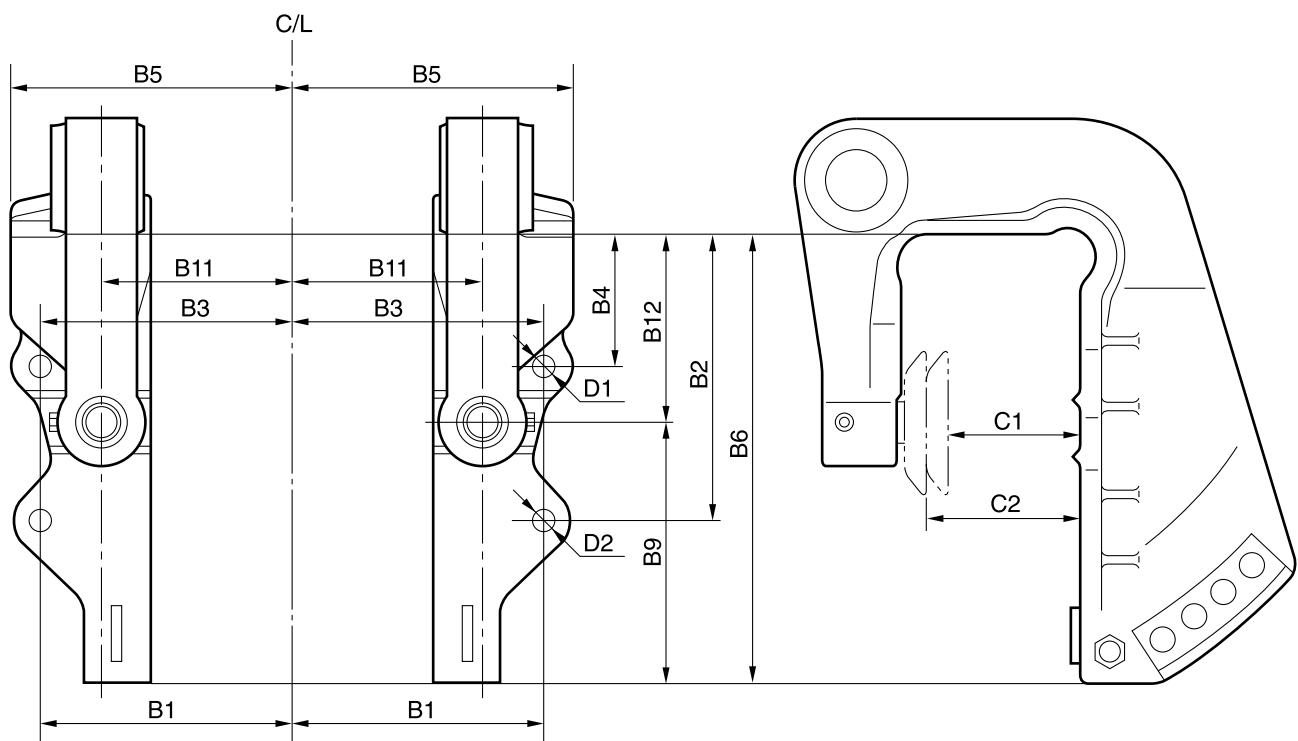


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	92.5 (3.6)	B8	—	C1	30 (1.2)	D1	8.3 (0.3)
B2	103.5 (4.1)	B9	54.5 (2.1)	C2	56 (2.2)	D2	8.3 (0.3)
B3	92.5 (3.6)	B10	—	C3	—	D3	—
B4	49 (1.9)	B11	70.5 (2.8)			D4	—
B5	102.5 (4.0)	B12	69 (2.7)				
B6	176 (6.9)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS


Global model	E9.9D	E15D	EK9.9D	EK15D	EK9.9J	EK15P		
Unified model								
Manual tilt								

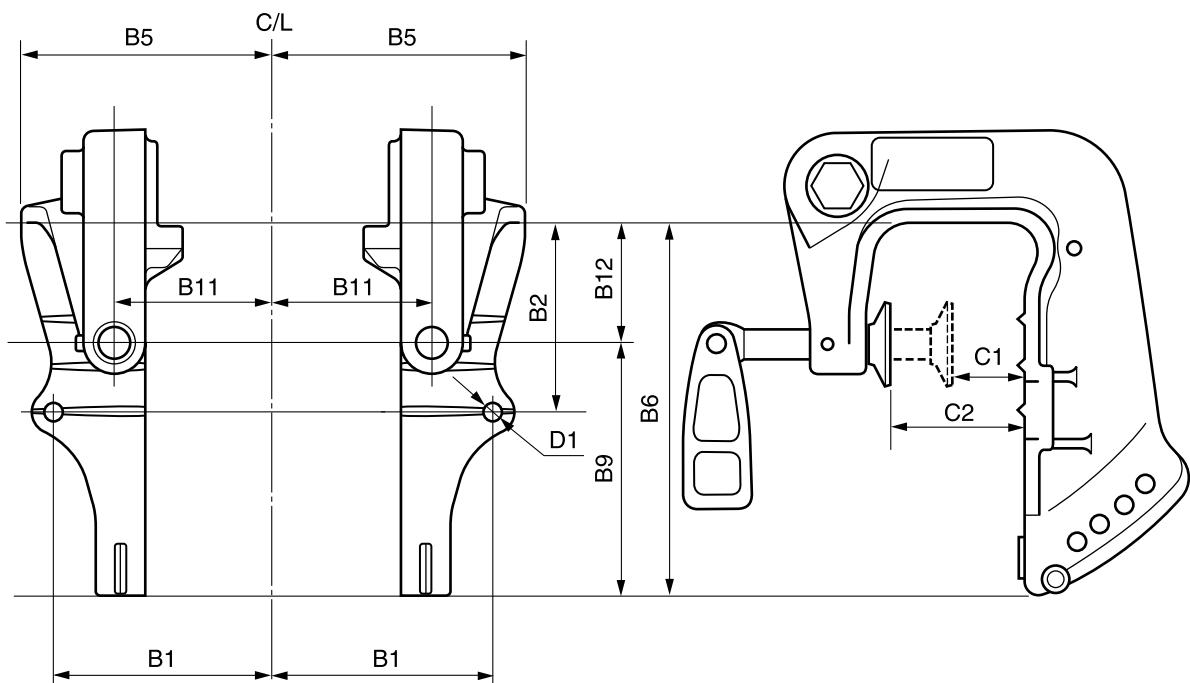

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	92.6 (3.6)	B8	—	C1	30 (1.2)	D1	8.3 (0.32)
B2	79 (3.1)	B9	107 (4.2)	C2	60 (2.4)	D2	—
B3	—	B10	—	C3	—	D3	—
B4	—	B11	67.3 (2.6)			D4	—
B5	106.3 (4.2)	B12	50 (2.0)				
B6	157 (6.2)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F8F	FT8G	F9.9H	F15C	F20B	F20C	F9.9J	FT9.9L
Unified model	F8B			F15A	F20A		F9.9B	T9.9B
Manual tilt								

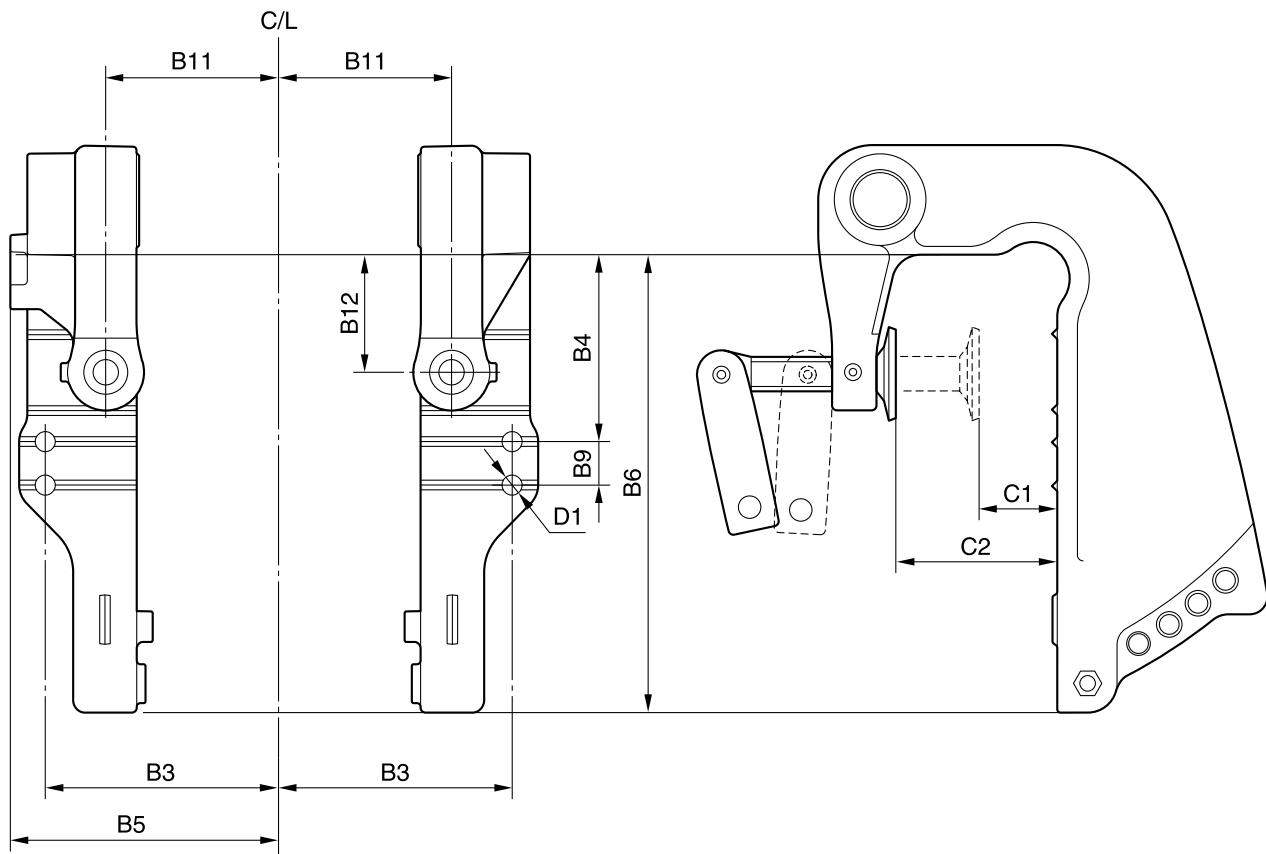

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	32 (1.3)	D1	8.3 (0.33)
B2	—	B9	18 (0.71)	C2	67 (2.6)	D2	—
B3	95.3 (3.8)	B10	—	C3	—	D3	—
B4	76.5 (3.0)	B11	70.5 (2.8)			D4	—
B5	110 (4.3)	B12	48 (1.9)				
B6	187.5 (7.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	FT8G	F15C	F20B	FT9.9L	F20G			
Unified model		F15A	F20A	T9.9B	F20B			
Power tilt								

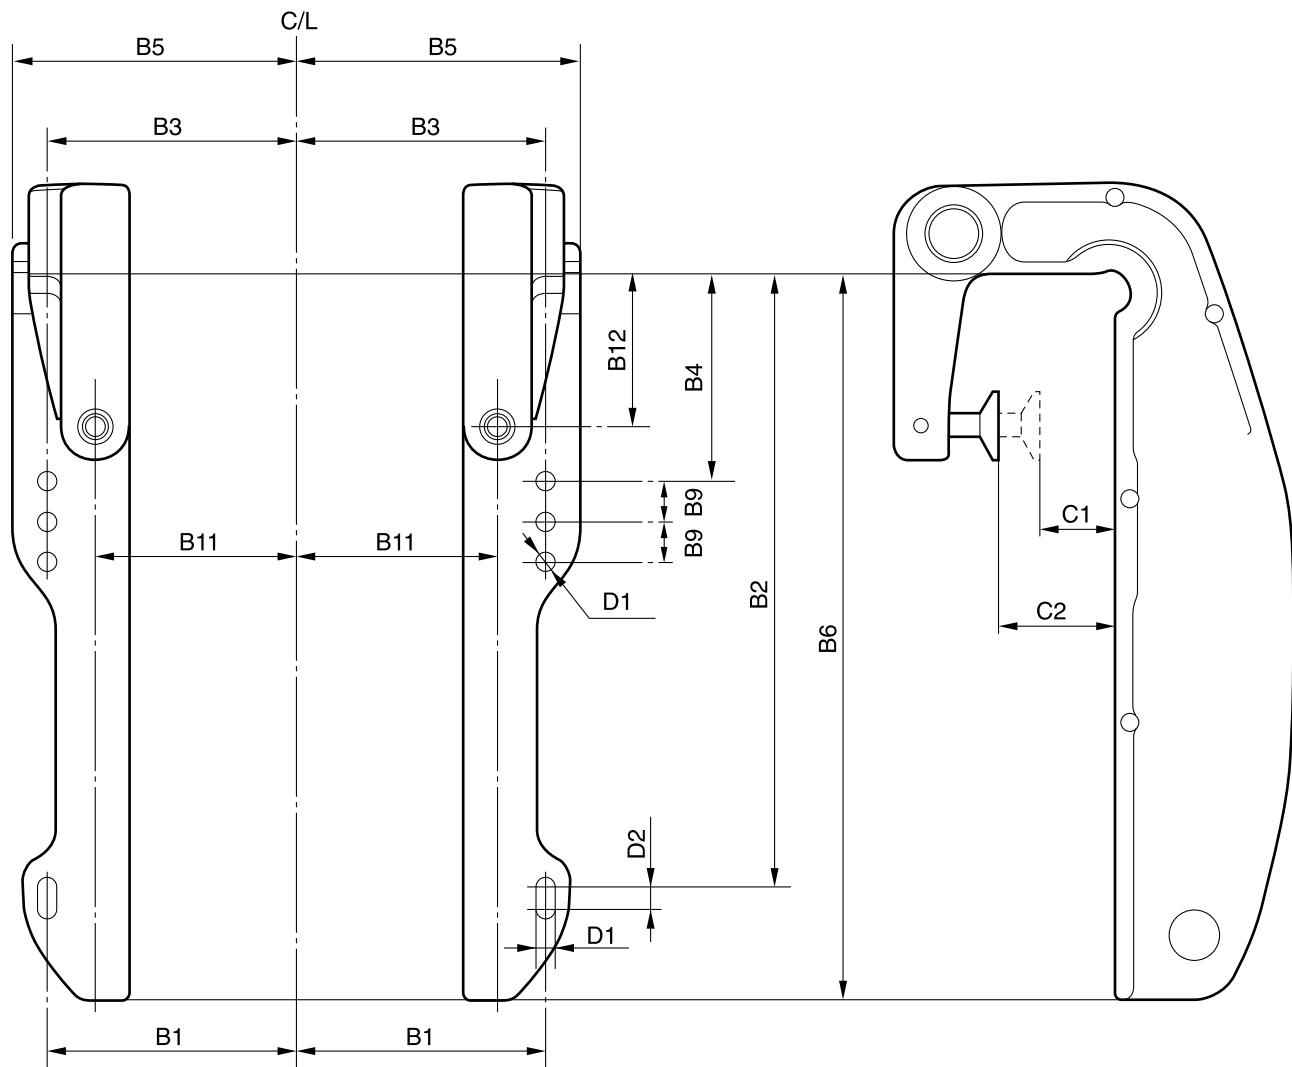

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	95.3 (3.8)	B8	—	C1	38 (1.5)	D1	8.3 (0.3)
B2	275.5 (10.8)	B9	18 (0.7)	C2	67 (2.6)	D2	10 (0.4)
B3	95.3 (3.8)	B10	—	C3	—	D3	—
B4	94.5 (3.7)	B11	73.5 (2.9)			D4	—
B5	111 (4.4)	B12	69.5 (2.7)				
B6	325.5 (12.8)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**

Global model	E/25B	25X	E/30H	EK25B	EK25C			
Unified model								
Manual tilt								

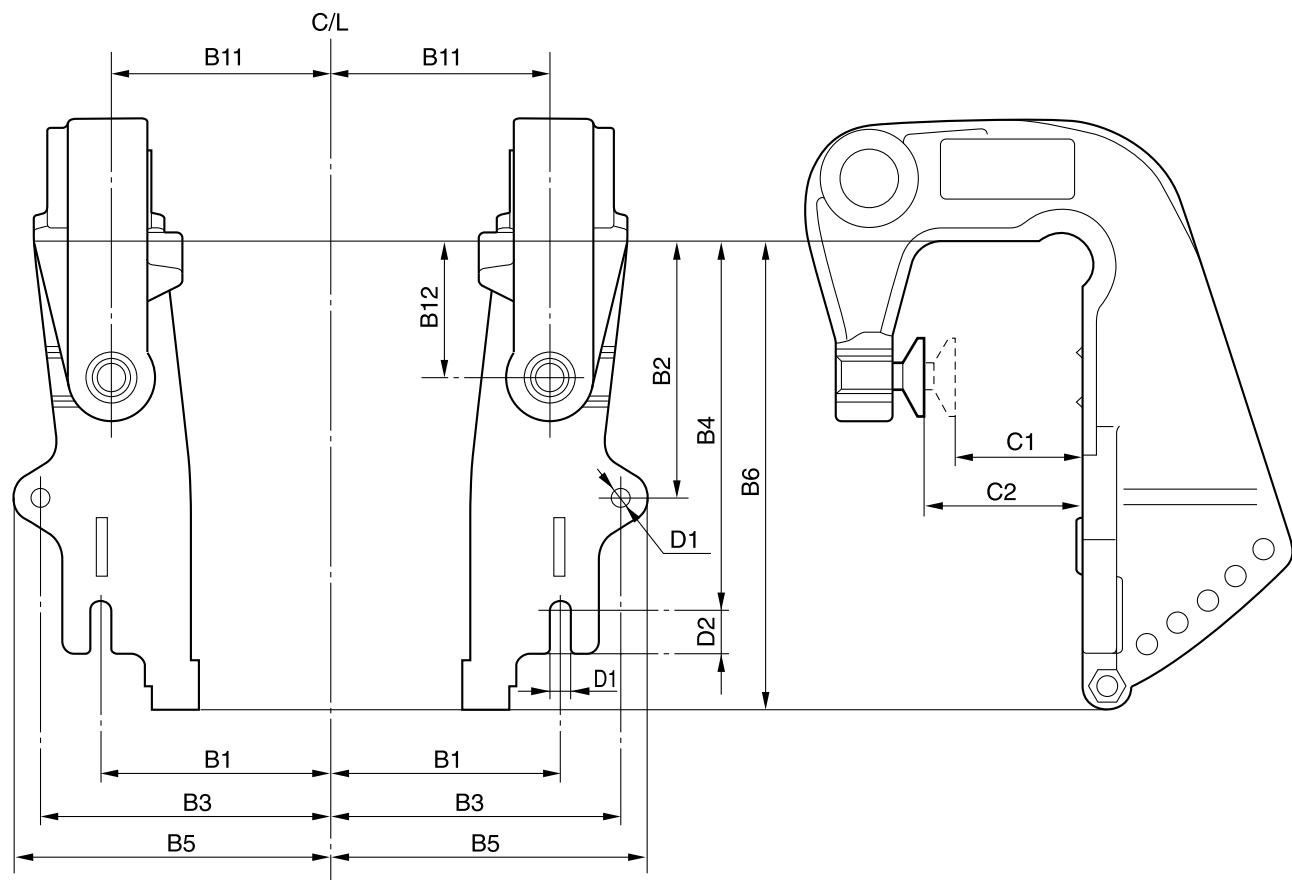


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	89 (3.5)	B8	—	C1	35 (1.4)	D1	8.5 (0.33)
B2	96.5 (3.8)	B9	—	C2	65 (2.6)	D2	15 (0.59)
B3	112.5 (4.4)	B10	—	C3	—	D3	—
B4	140 (5.5)	B11	85 (3.3)			D4	—
B5	122.5 (4.8)	B12	51 (2.0)				
B6	176 (6.9)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	E/40X	F25D						
Unified model		F25A						
Manual tilt								

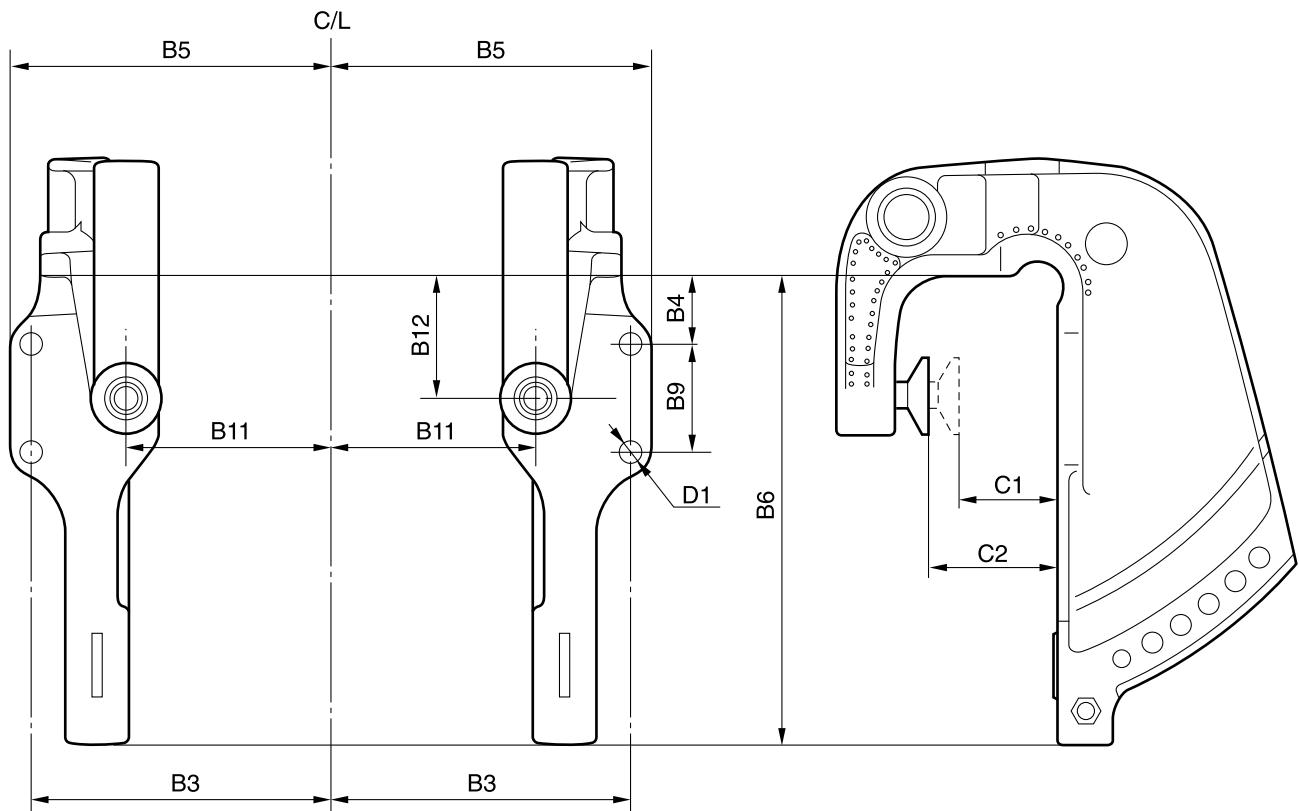


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	37 (1.5)	D1	10.5 (0.41)
B2	—	B9	50 (2.0)	C2	68 (2.7)	D2	—
B3	140 (5.5)	B10	—	C3	—	D3	—
B4	32 (1.3)	B11	95.5 (3.8)			D4	—
B5	150 (5.9)	B12	57 (2.2)				
B6	218 (8.6)						
B7	—						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS


Global model	F20G	F25G						
Unified model	F20B	F25C						
Manual tilt								

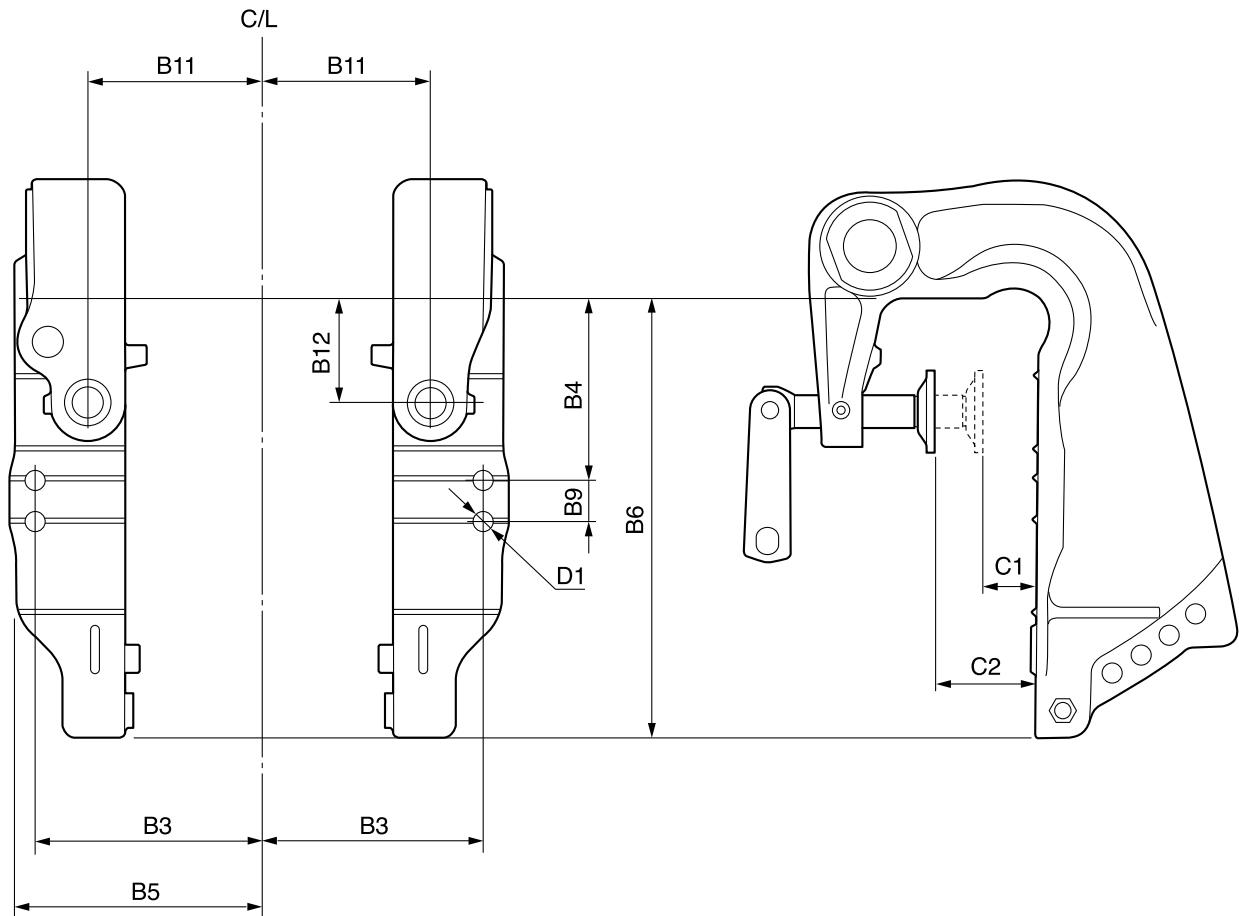

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	32 (1.3)	D1	8.3 (0.33)
B2	—	B9	18 (0.7)	C2	67 (2.6)	D2	—
B3	95 (3.8)	B10	—	C3	—	D3	—
B4	76.5 (3.0)	B11	73.5 (2.9)			D4	—
B5	106 (4.2)	B12	48 (1.9)				
B6	188 (7.4)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	E40G	E40J	EK40G	EK40J				
Unified model								
Manual tilt								

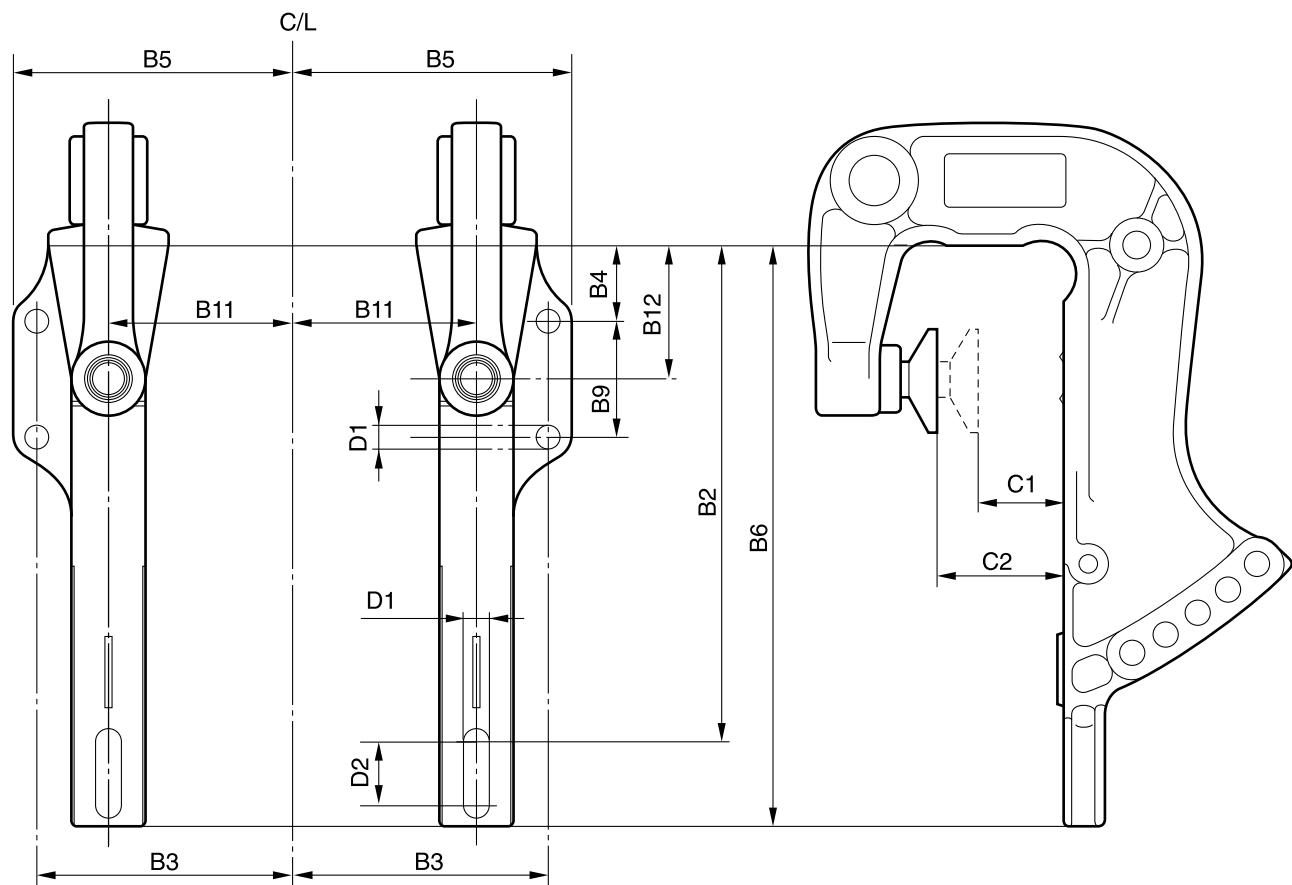

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	—	B8	—	C1	33 (1.3)	D1	10.5 (0.41)
B2	212 (8.3)	B9	50 (2.0)	C2	60 (2.3)	D2	27 (1.1)
B3	124.5 (4.9)	B10	—	C3	—	D3	—
B4	32 (1.3)	B11	93.5 (3.7)			D4	—
B5	134.5 (5.3)	B12	57 (2.2)				
B6	249 (9.8)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	E/40X	F25D	FT25F	F25G				
Unified model		F25A/B	T25A	F25C				
Global model	F30B	F40F						
Unified model	F30A	F40A						
PTT & Hydro-tilt								

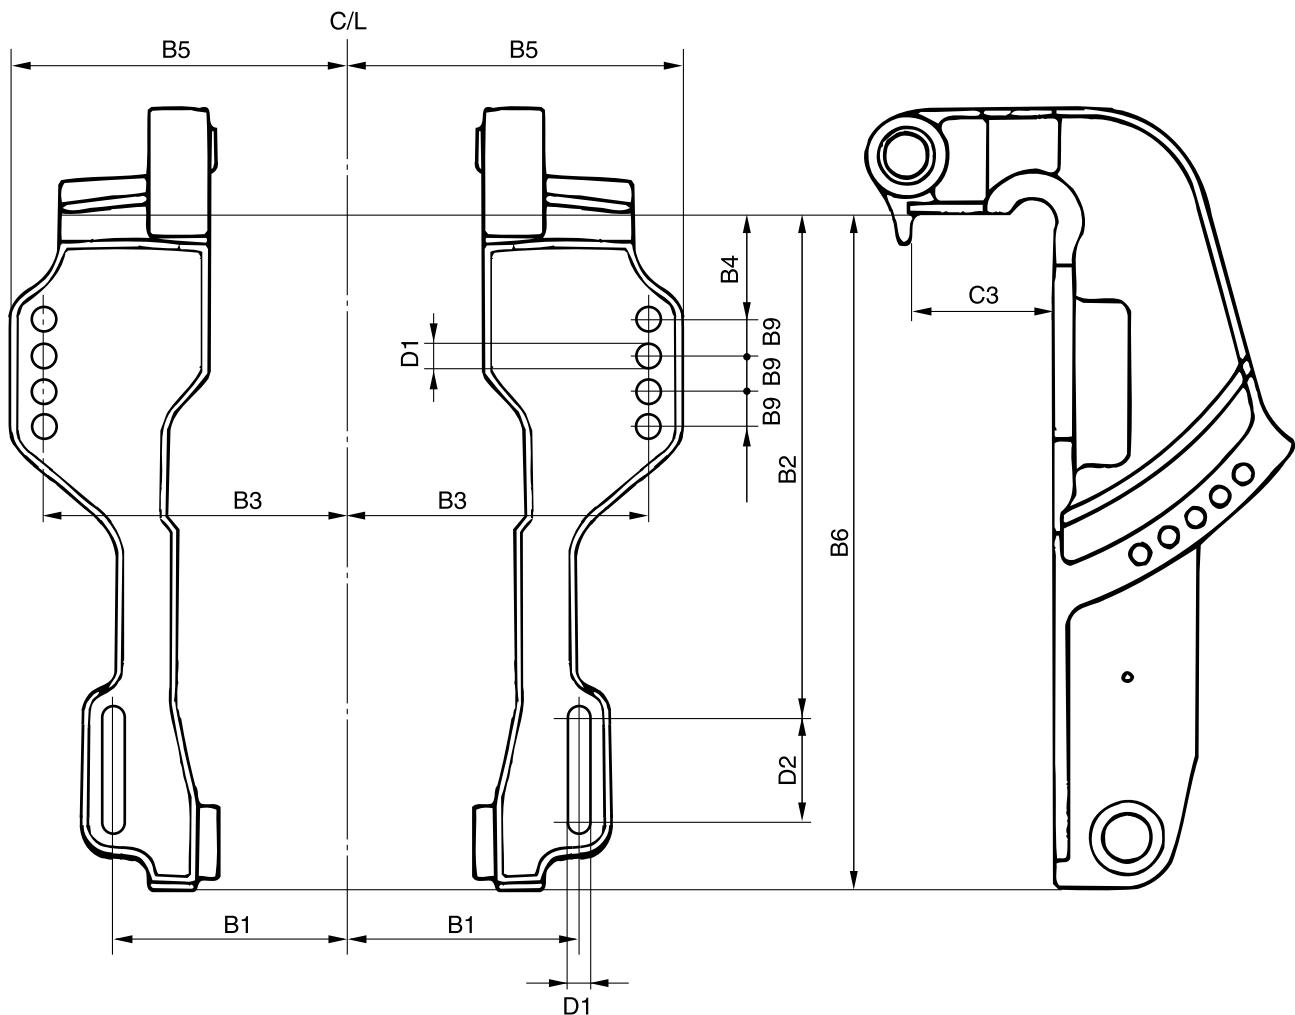

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	—	C1	—	D1	13 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	69 (2.7)	D3	—
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—				
B6	338 (13.3)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F40J							
Unified model								
Hydro-tilt								

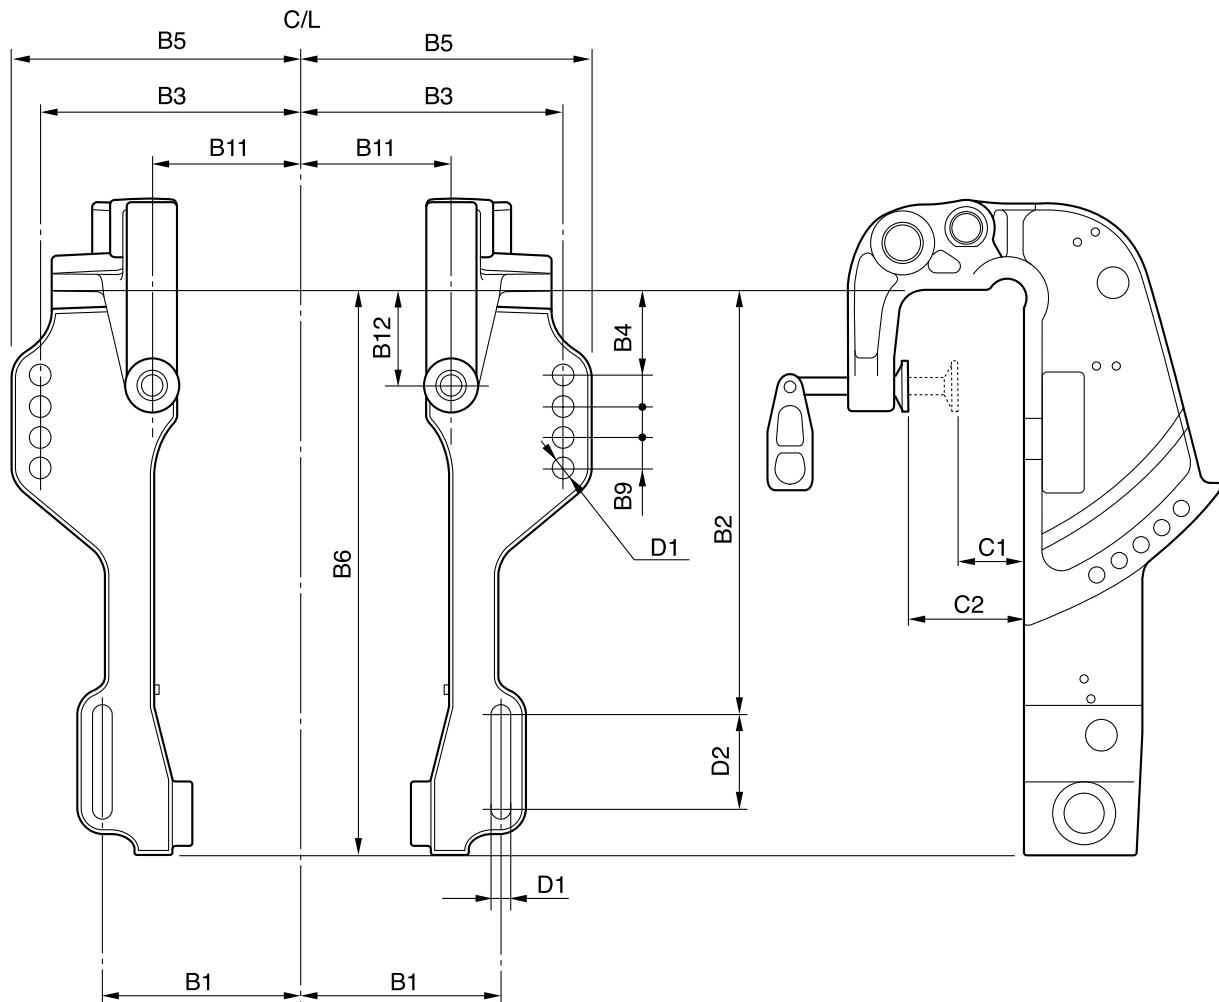

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	—	C1	33.5 (1.3)	D1	13 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	70.5 (2.8)	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	—	D3	—
B4	50.8 (2.0)	B11	95.5 (3.8)			D4	—
B5	180 (7.1)	B12	57 (2.2)				
B6	338 (13.3)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F40H	F40G	F50H	FT50J	F60F	FT60G	F70A	
Unified model			F50B	T50B	F60B	T60B	F70A	
PTT & Hydro-tilt								

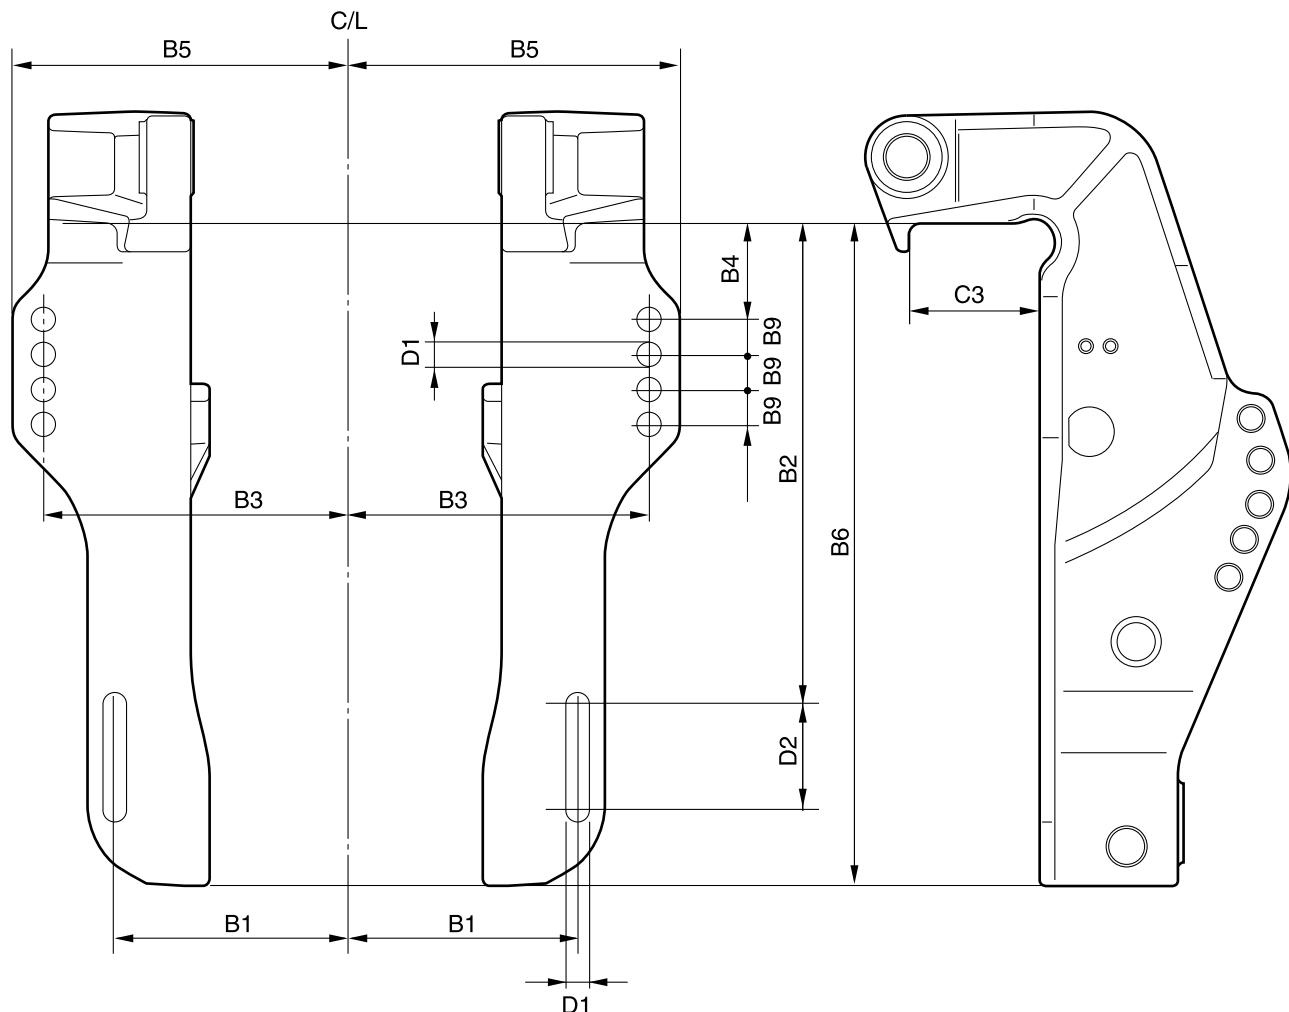

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	—	C1	—	D1	13 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	69 (2.7)	D3	—
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—				
B6	350 (13.8)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	40V	50H	E60H	F50D	FT50C			
Unified model								
PTT & Hydro-tilt								

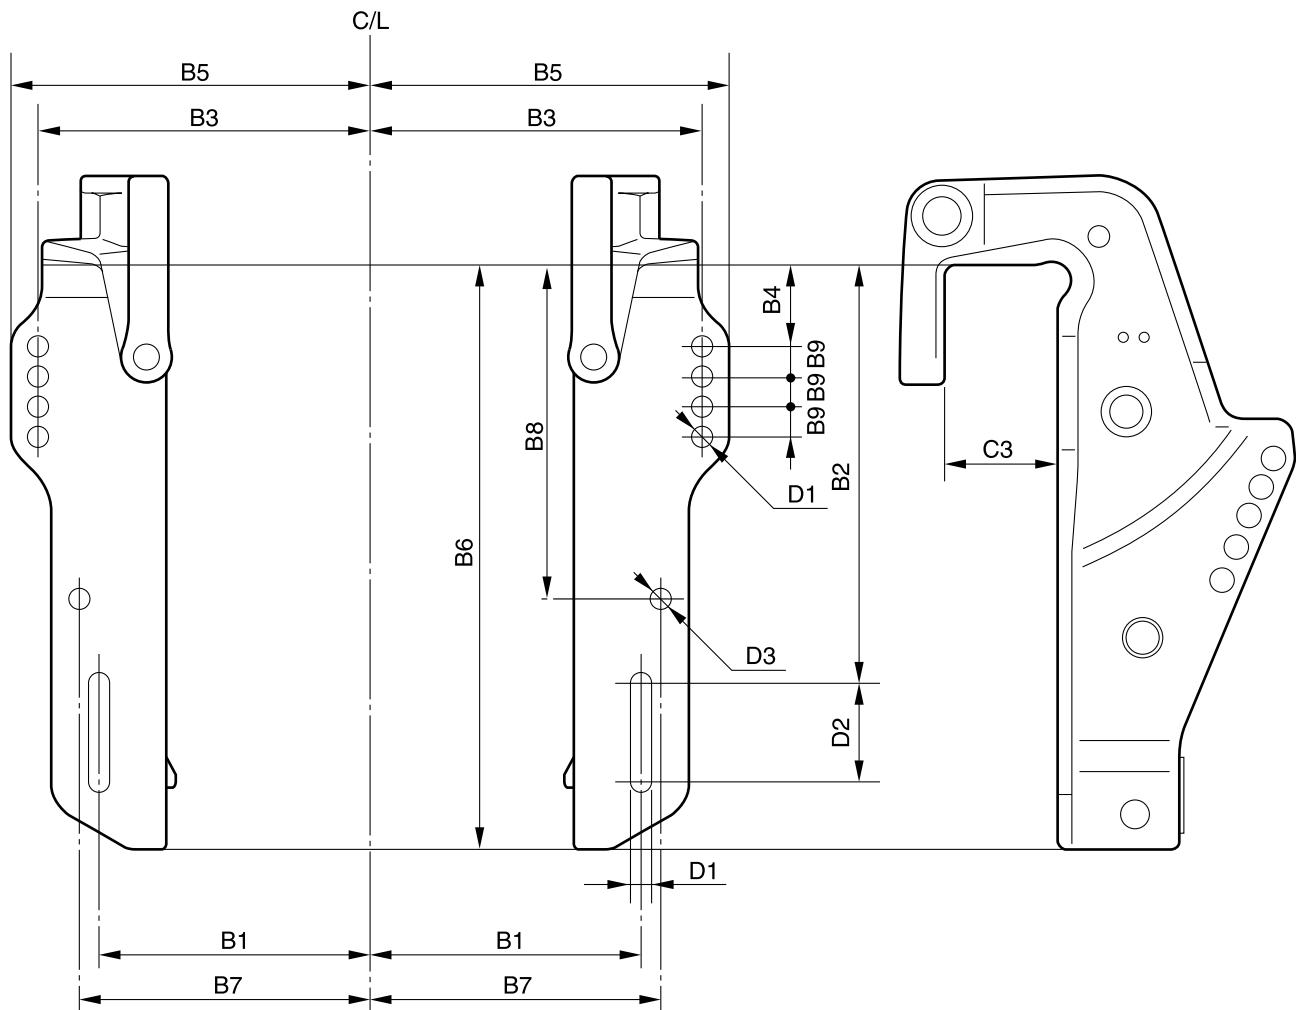

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	126 (5.0)	B8	203 (8.0)	C1	—	D1	13 (0.51)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	D2	60.5 (2.4)
B3	163.5 (6.4)	B10	—	C3	69 (2.7)	D3	13 (0.51)
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—				
B6	355 (14.0)						
B7	138 (5.4)						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	40V	50H						
Unified model								
Manual tilt								

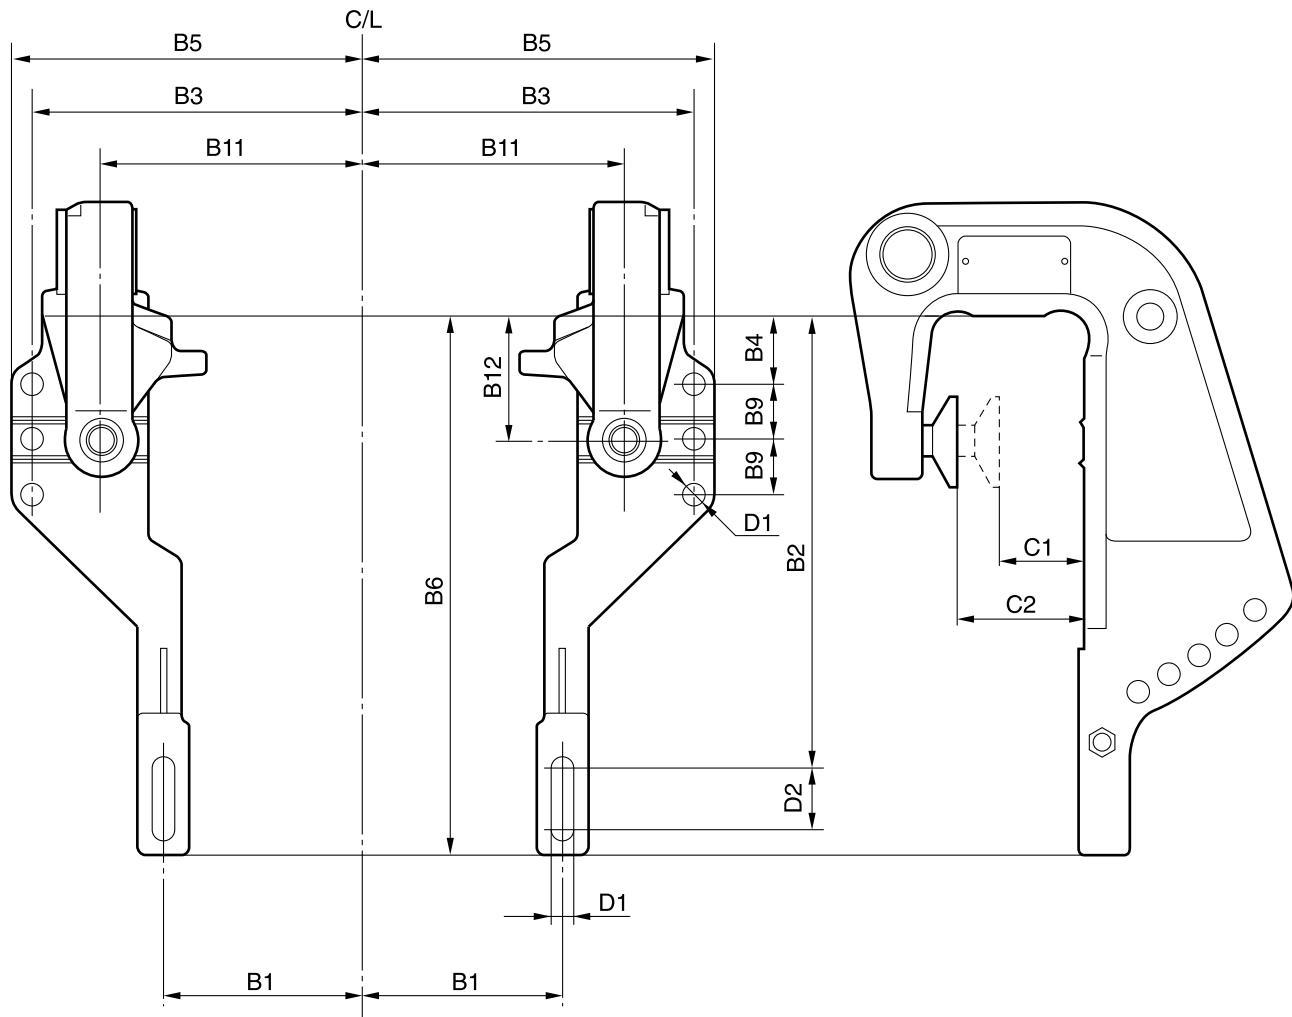

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	62.5 (2.5)	B8	—	C1	30 (1.2)	D1	10.5 (0.41)
B2	208 (8.2)	B9	25 (0.98)	C2	66 (2.6)	D2	26 (1.0)
B3	121.5 (4.8)	B10	—	C3	—	D3	—
B4	32 (1.3)	B11	90.5 (3.6)			D4	—
B5	131.5 (5.2)	B12	57 (2.2)				
B6	245 (9.6)						
B7	—						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**

Global model	E48C							
Unified model								
Manual tilt								

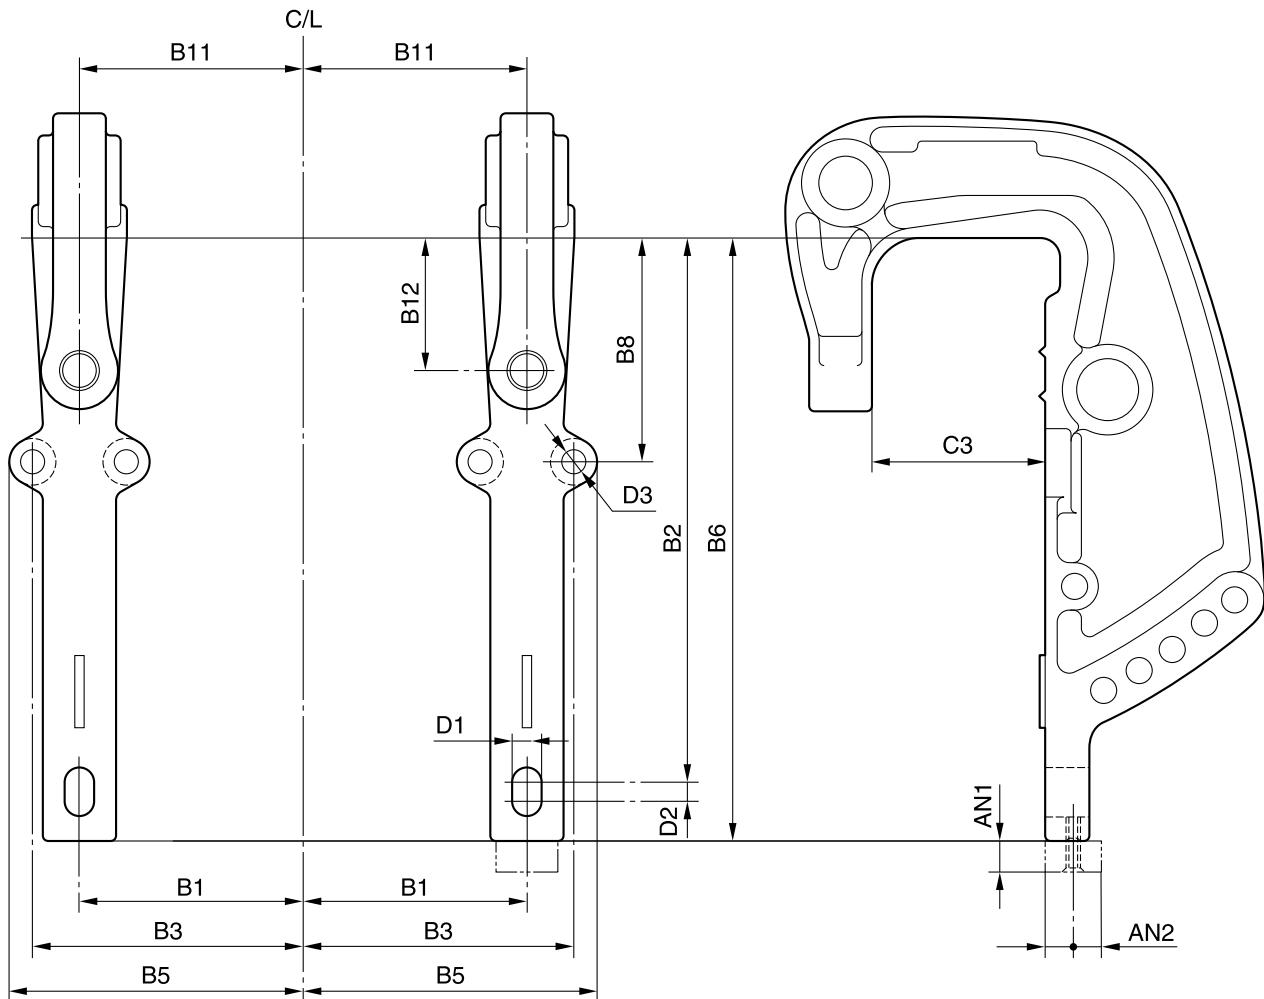


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	96 (3.8)	B8	95 (3.7)	C1	—	AN1	14 (0.55)
B2	230 (9.1)	B9	—	C2	—	AN2	12 (0.47)
B3	119 (4.7)	B10	—	C3	73 (2.9)		
B4	—	B11	96 (3.8)	D1	12 (0.47)		
B5	129 (5.1)	B12	57 (2.2)	D2	8 (0.31)		
B6	254 (10.0)			D3	10.5 (0.41)		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS


Global model	55B	60F	E60H				
Unified model							
PTT & Hydro-tilt for S-transom							

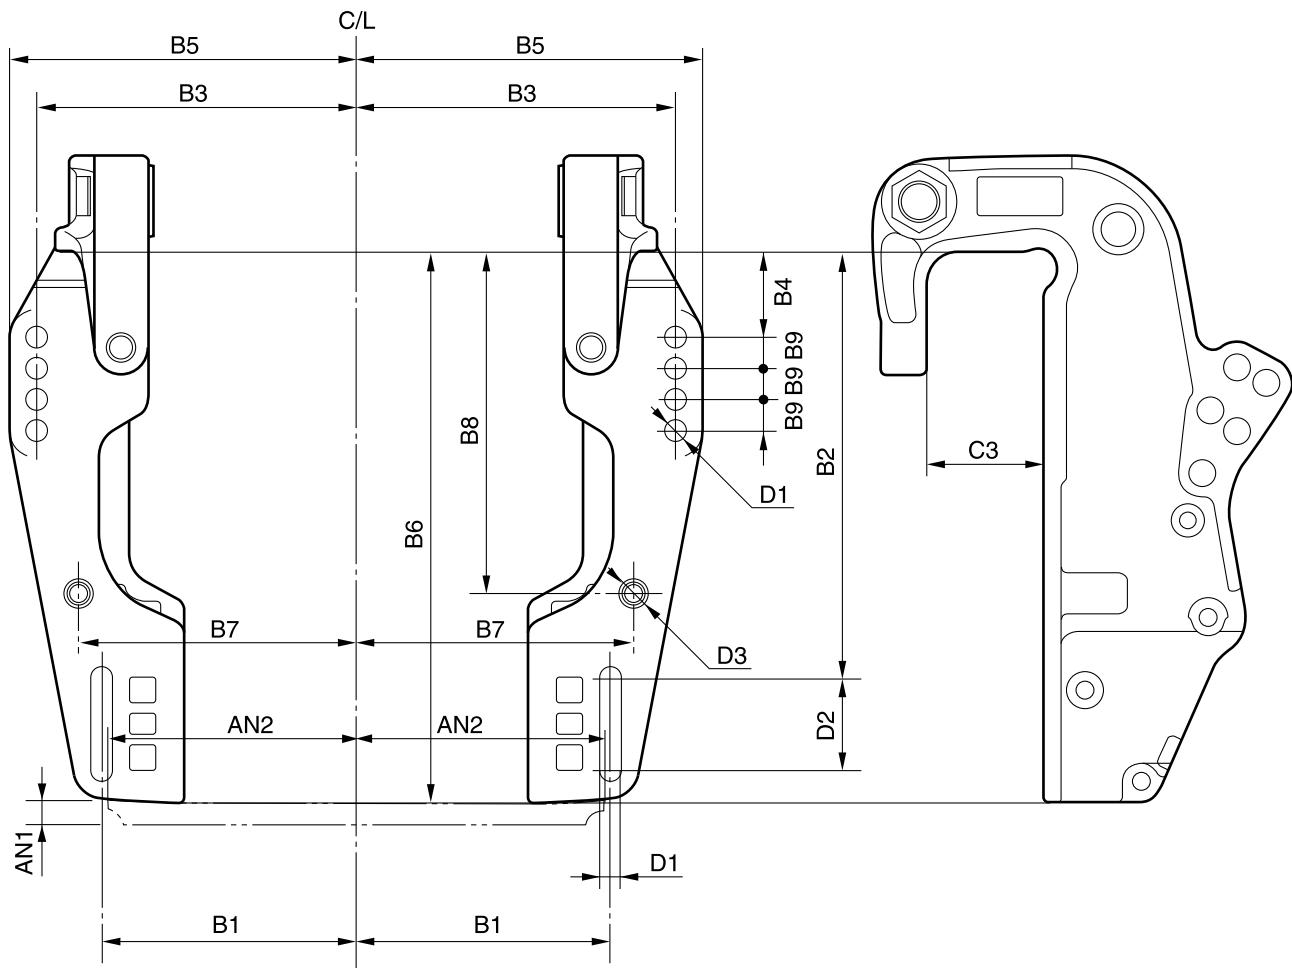

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	203.2 (8.0)	C1	—	D1	13 (0.51)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	68.5 (2.7)	D3	—
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—			AN1	17.5 (0.69)
B6	329 (13.0)					AN2	102 (4.0)
B7	138.1 (5.4)						

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**

Global model	55B	E55D	60F	70B	85A	90A	
Unified model							
Global model	E60H	E75B					
Unified model							
PTT & Hydro-tilt for L/X-transom							

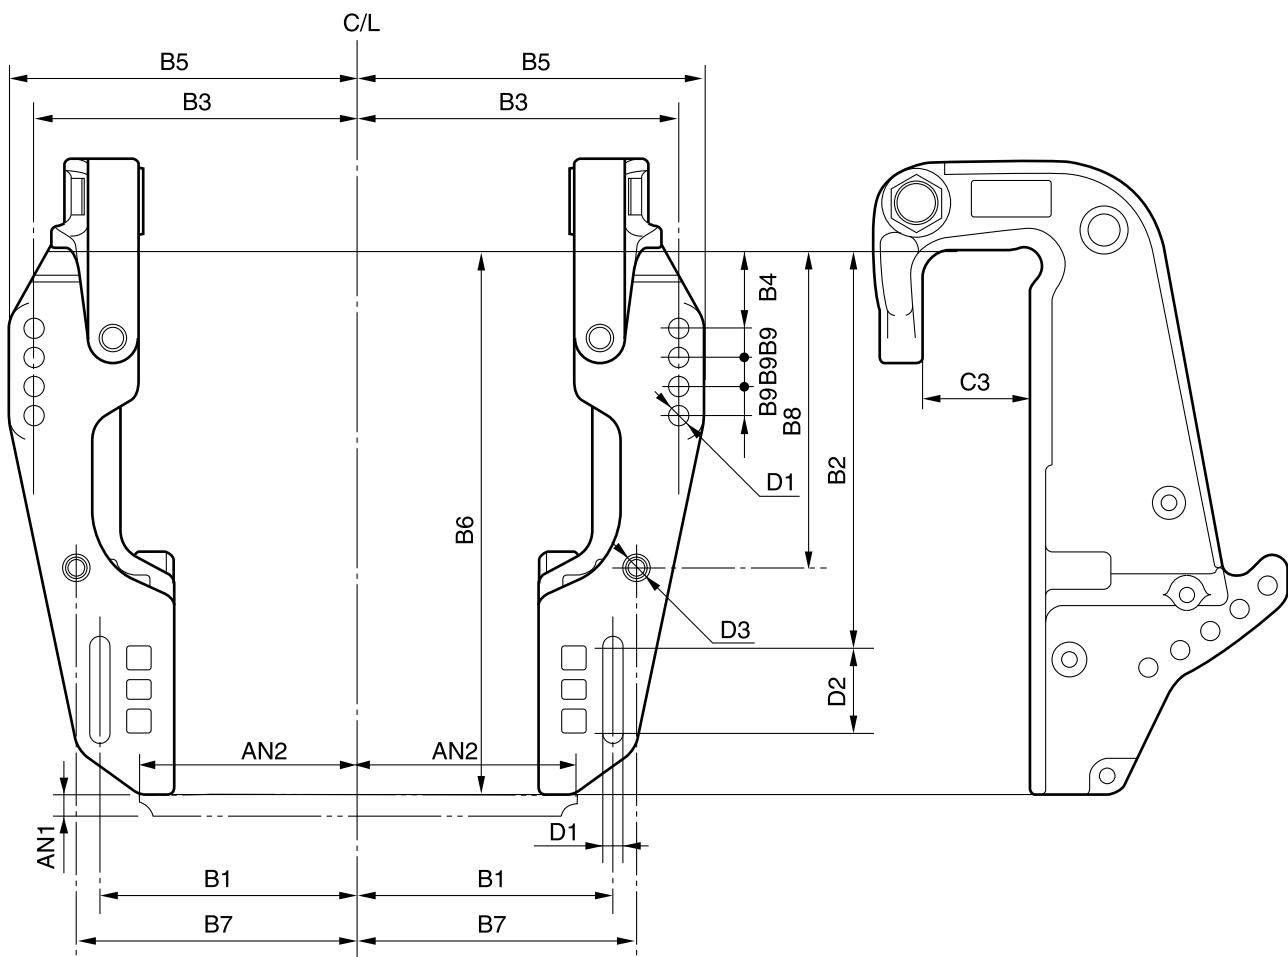


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	203.2 (8.0)	C1	—	D1	13 (0.51)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	D2	55.5 (2.2)
B3	163.5 (6.4)	B10	—	C3	68.5 (2.7)	D3	—
B4	50.8 (2.0)	B11	—			D4	—
B5	180 (7.1)	B12	—			AN1	17.5 (0.69)
B6	352 (13.9)					AN2	102 (4.0)
B7	138.1 (5.4)						

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS


Global model	F80B	F90B	F100D				
Unified model							
PTT							

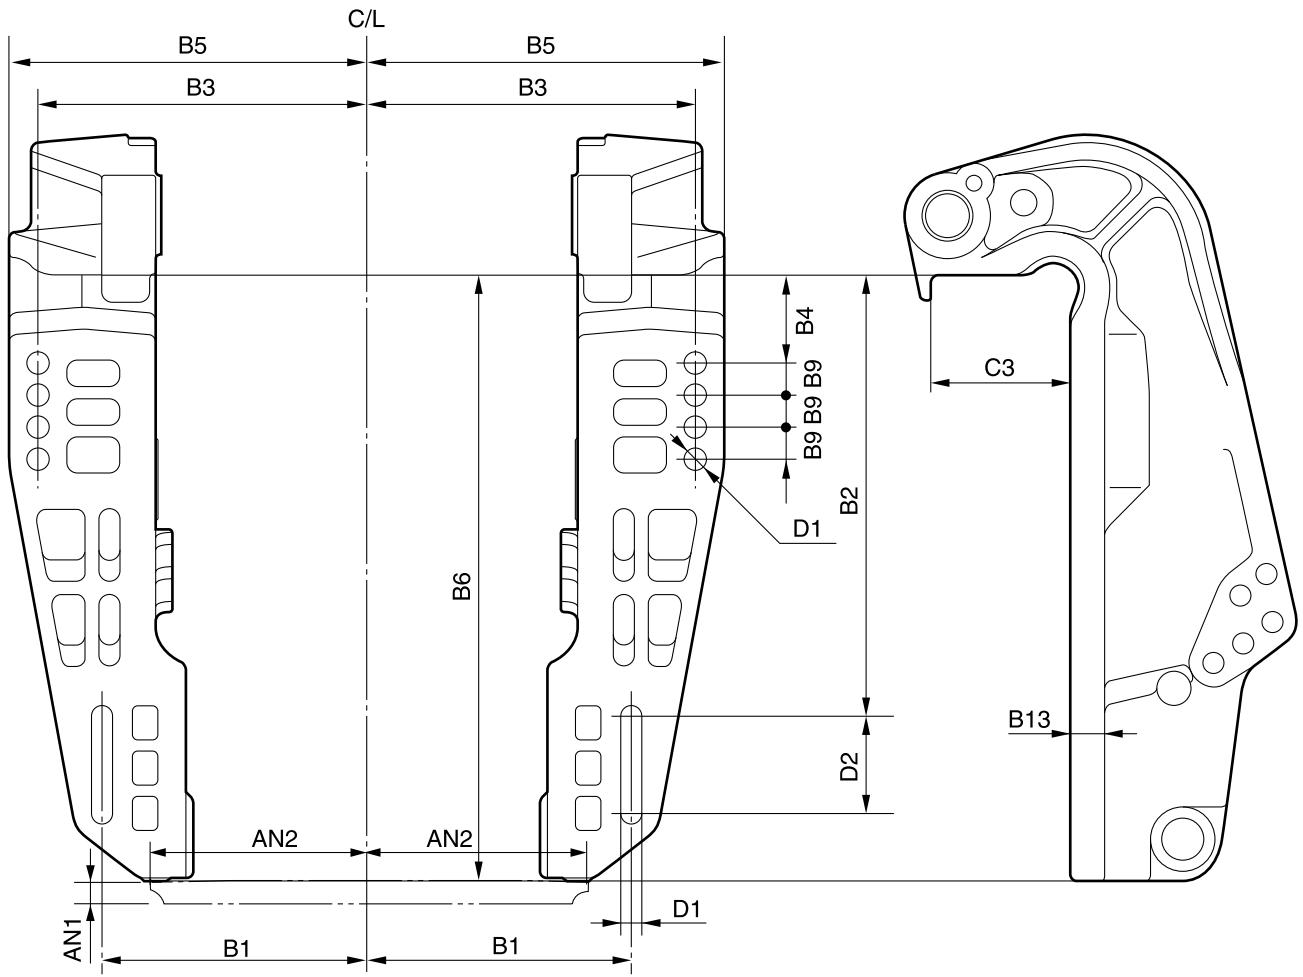

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	17.5 (0.69)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	80 (3.1)		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	368 (14.5)	B13	20 (0.79)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	E115A	L/150A	L/200A				
Unified model							
Global model	F75C	F100B	F/FL115A	F/FL150D	F/FL150F		
Unified model				F/LF150B			
PTT & Hydro tilt							

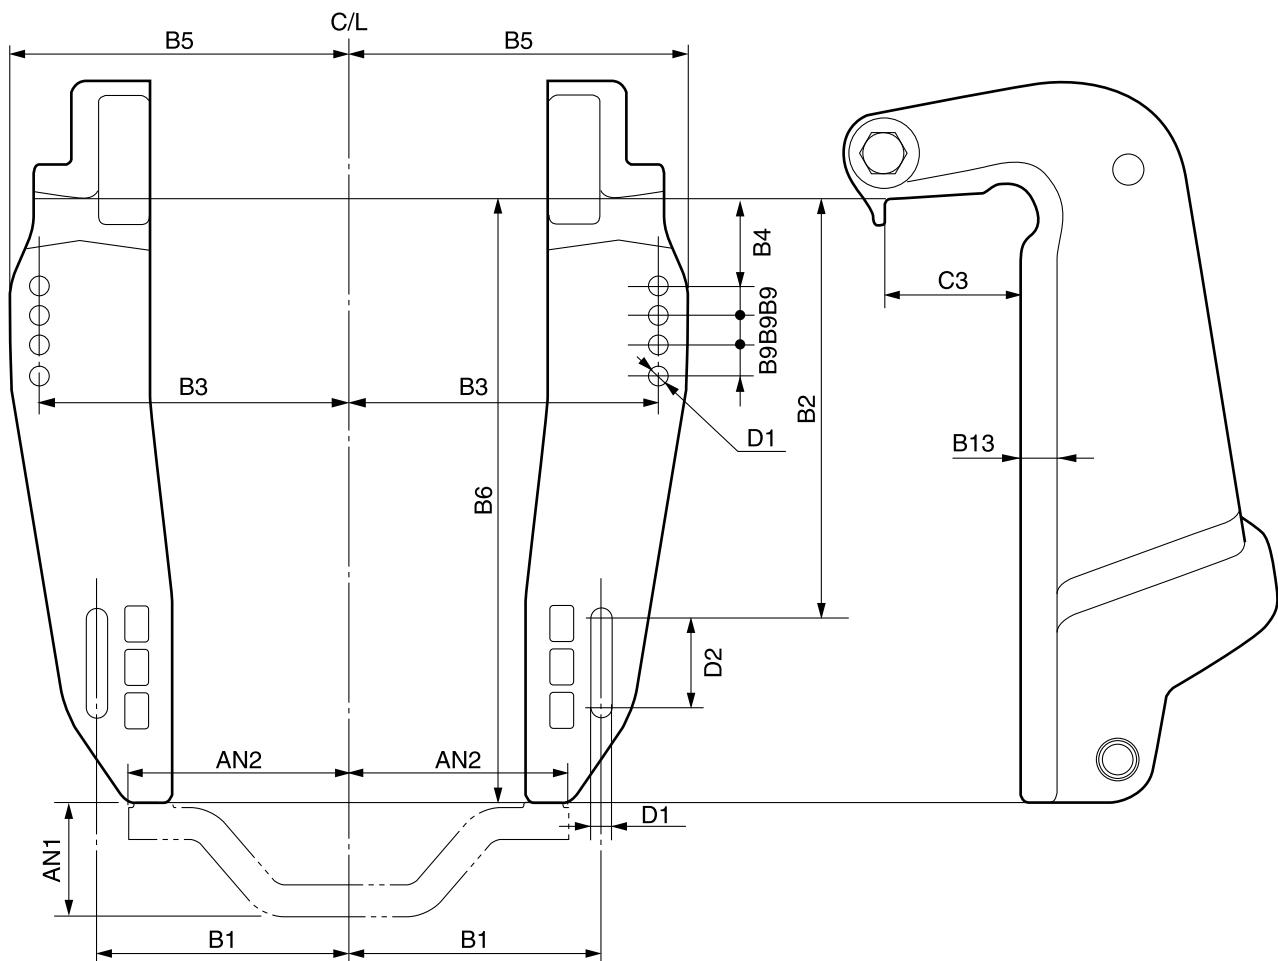

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	52 (2.0)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	82 (3.2)		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	367 (14.4)	B13	24 (0.94)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F/FL115B	F115C	F130A	F90C	F100F	F75D	F75F	F80D
Unified model	F/LF115B	VF115A	F130A	F90B		F75B		
Global model	F90D	F100G	F125A					
Unified model	VF90A							
PTT								

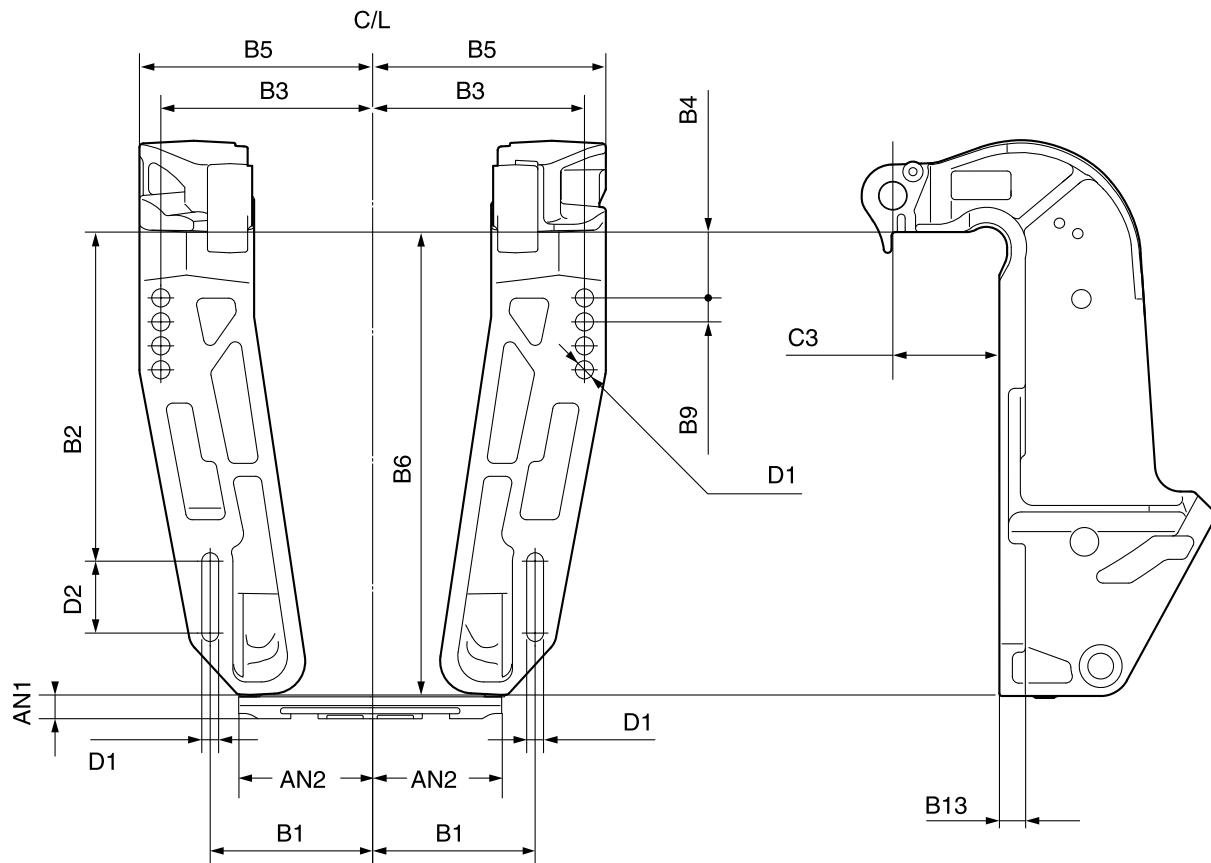

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	17.5 (0.69)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	82 (3.2)		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	357.2 (14.1)	B13	20 (0.79)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F150C-X	F175A	F/FL200F	F/FL200G	F/FL175C	F/FL150G		
Unified model	VF150XA	F175A	F/LF200B	F/LF200CA	F/LF175CA	F/LF150CA		
PTT								

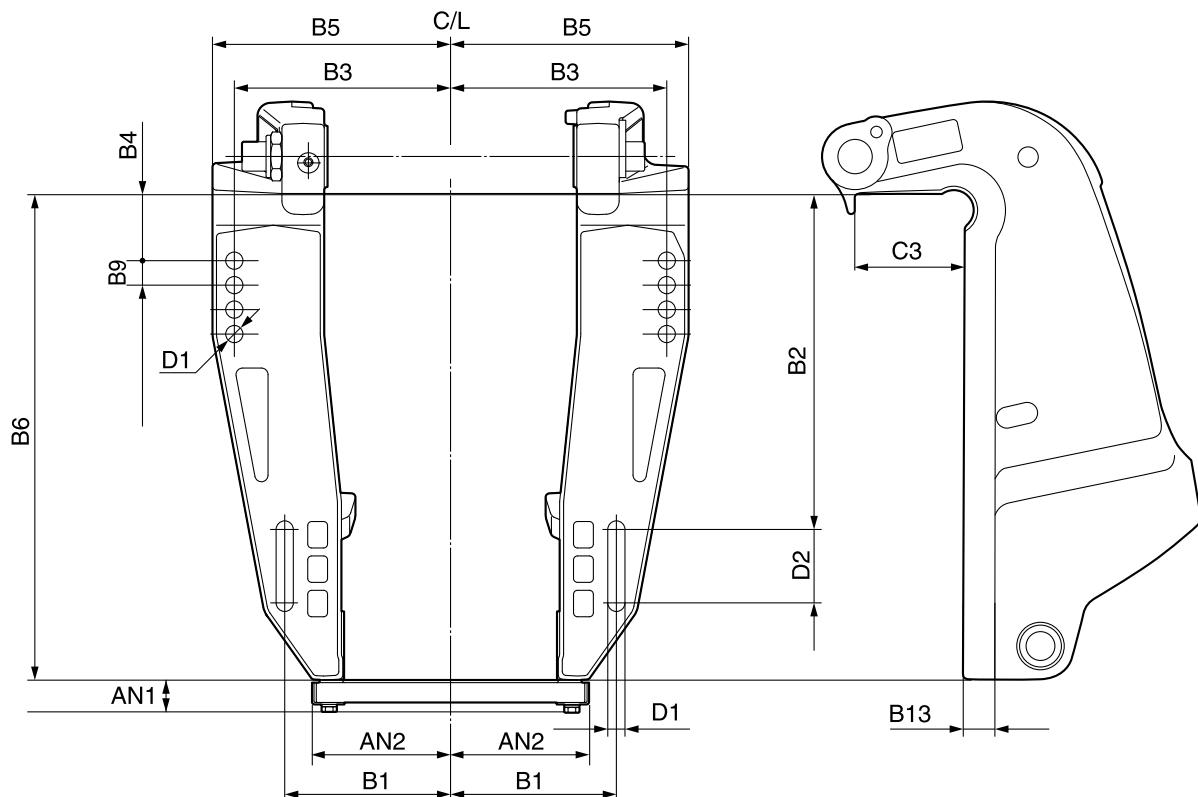

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	25 (1.0)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	82 (3.2)		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	367 (14.4)	B13	24 (0.94)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F150C-L	F165A	F175B	F185A	F200D	F225D	F250C	F225G
Unified model	VF150LA		VF175LA		VF200LA	VF225LA	VF250LA	
Global model	F250F	F275A						
Unified model								
PTT								

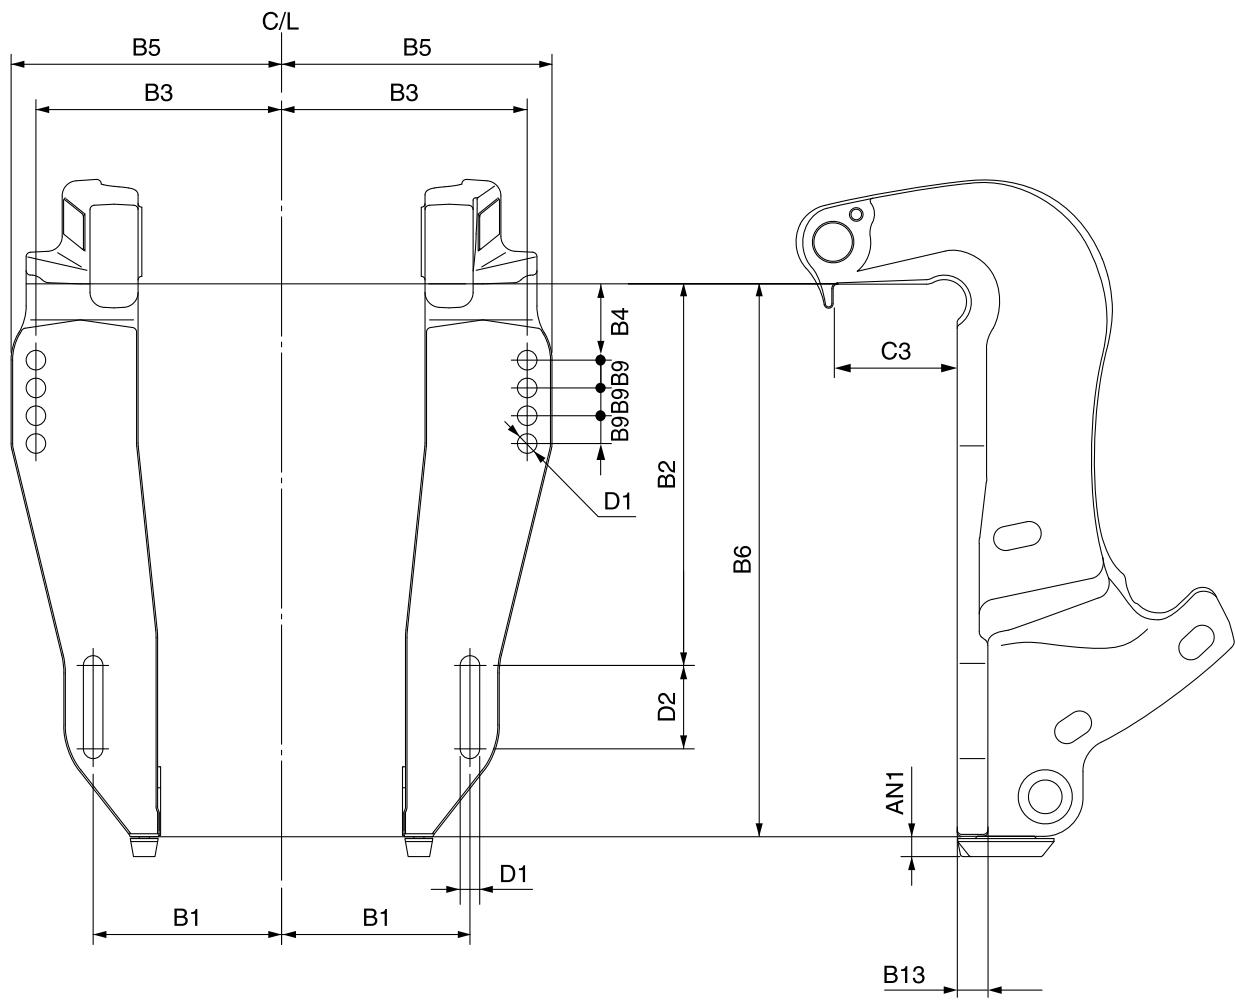

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	13.5 (0.5)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	AN2	—
B3	163.5 (6.4)	B10	—	C3	82 (3.2)		
B4	50.8 (2.0)	B11	—	D1	13 (0.5)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	368 (14.5)	B13	20 (0.79)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**


Global model	F/FL200B	F/FL200C	F/FL225B	F/FL250A	F/FL250H	F/FL225F	F/FL250D	F/FL300B
Unified model		F/LF200A	F/LF225A	F/LF250A		F/LF225CA	F/LF250CA	F/LF300CA
Global model	F250J-X	F/FL225H	F/FL250L	F/FL300C	F200H	F/FL300D		
Unified model	VF250XA	F/LF225B	F/LF250B	F/LF300A	VF200XA			
PTT								

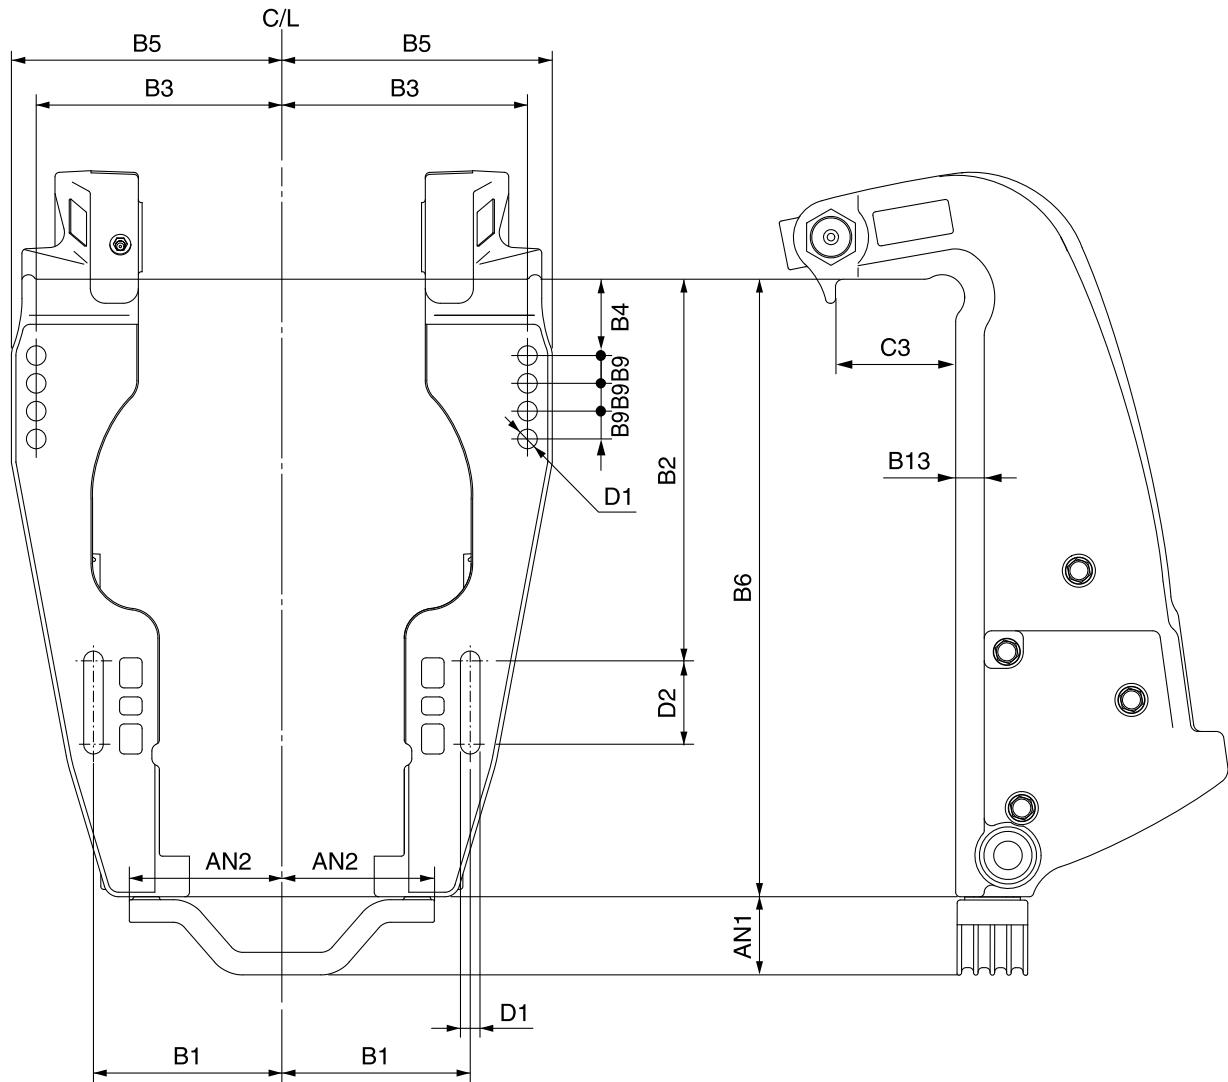

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	52 (2.0)
B2	254 (10.0)	B9	18.5 (0.7)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	79 (3.1)		
B4	50.8 (2.0)	B11	—	D1	13 (0.5)		
B5	180 (7.1)	B12	—	D2	55.5 (2.2)		
B6	411 (16.2)	B13	20 (0.79)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**

Global model	F/FL350A							
Unified model	F/LF350CC							
PTT								

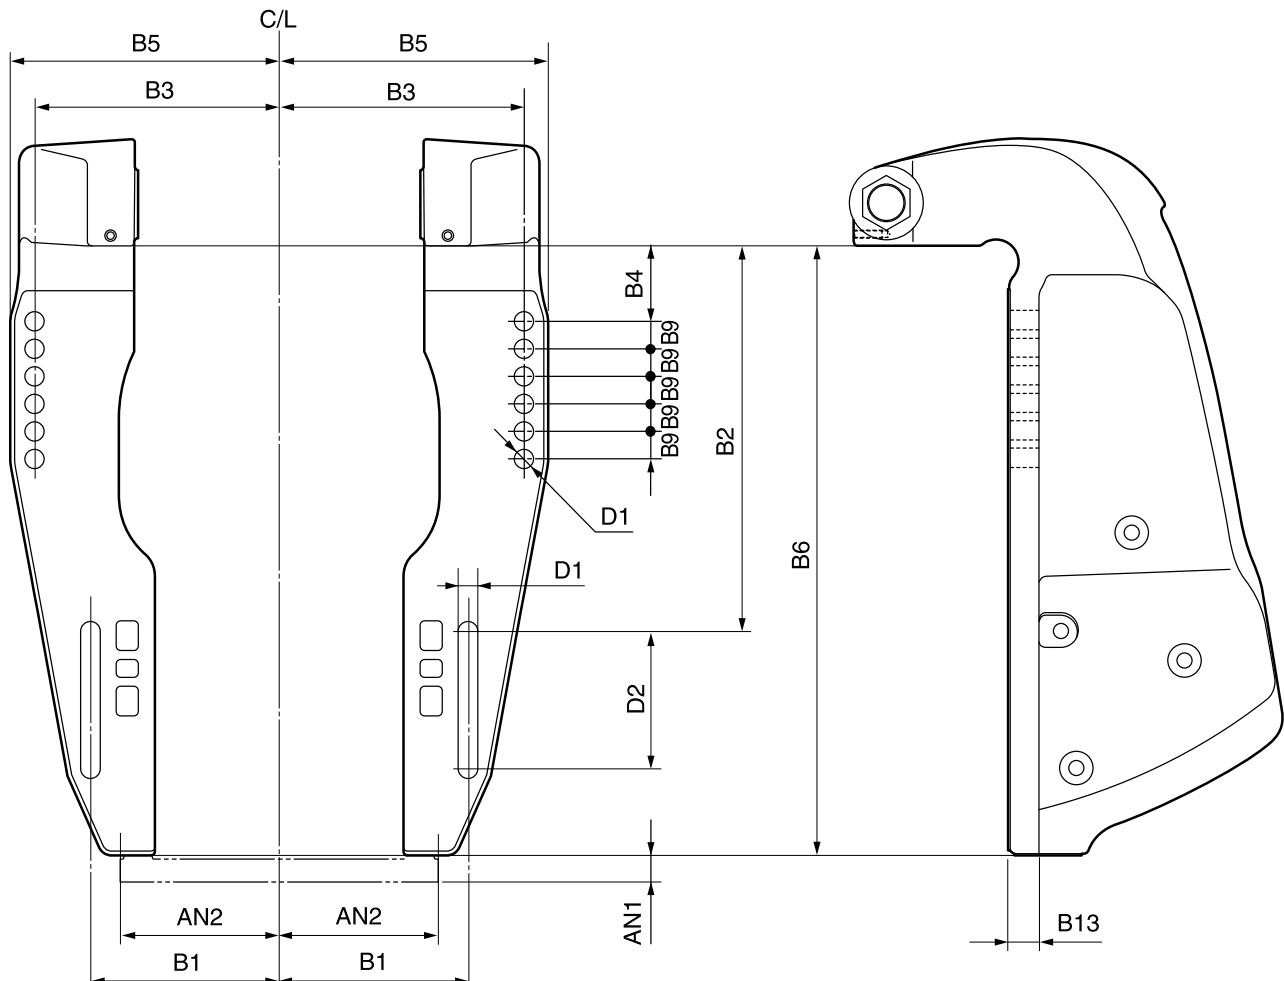


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	C1	—	AN1	17.5 (0.69)
B2	254 (10.0)	B9	18.5 (0.73)	C2	—	AN2	102 (4.0)
B3	163.5 (6.4)	B10	—	C3	—		
B4	50.8 (2.0)	B11	—	D1	13 (0.51)		
B5	180 (7.1)	B12	—	D2	92.6 (3.6)		
B6	406 (16.0)	B13	21 (0.83)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS


Global model	F/FL300G	F/FL250P	F/FL225J					
Unified model	F/LF300CB	F/LF250CB	F/LF225CB					
PTT								

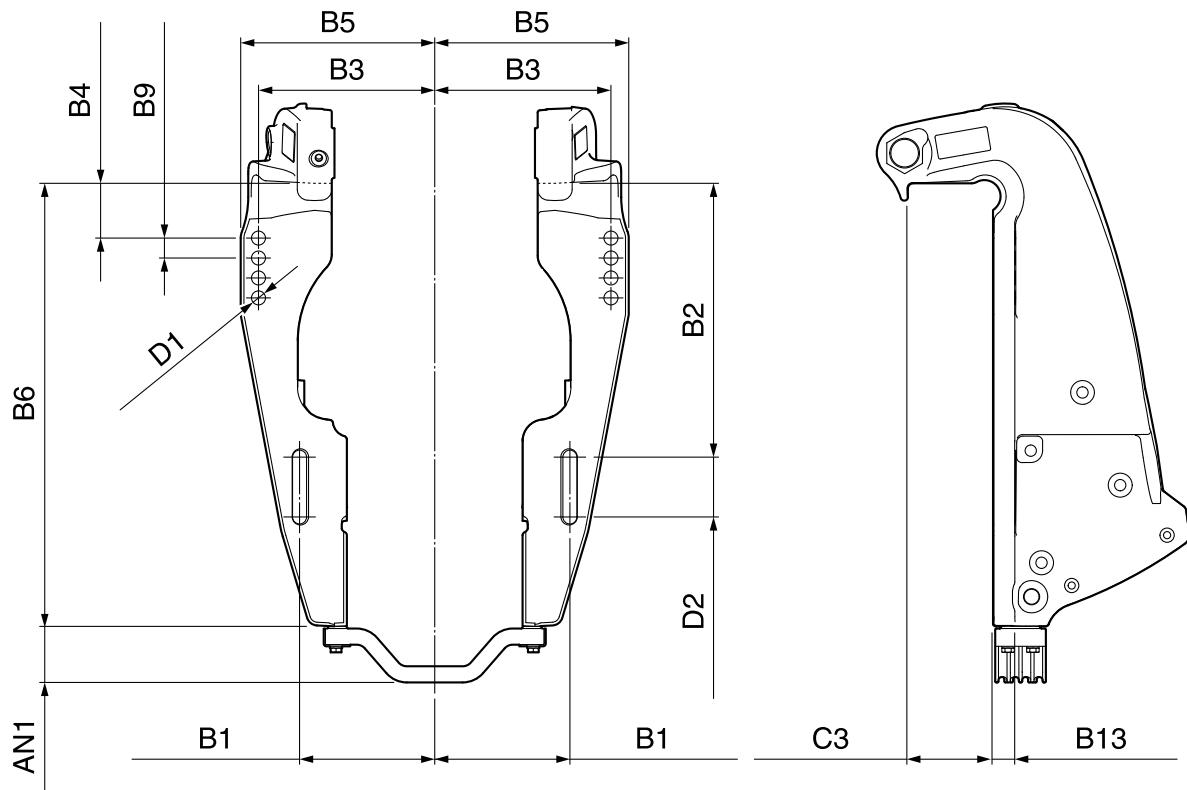

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.94)	B8	—	C1	—	AN1	52.0 (2.05)
B2	254.0 (10.0)	B9	18.5 (0.73)	C2	—	AN2	—
B3	163.5 (6.44)	B10	—	C3	79.0 (3.11)		
B4	50.8 (2.00)	B11	—	D1	13.0 (0.51)		
B5	180.0 (7.09)	B12	—	D2	55.5 (2.19)		
B6	411.0 (16.18)	B13	21.0 (0.83)	D3	—		
B7	—			D4	—		

OUTBOARD MOTOR DIMENSIONS**CLAMP BRACKET DIMENSIONS**

Global model	F/FL300F	F/FL250N						
Unified model	F/LF300SB	F/LF250SB						
PTT								

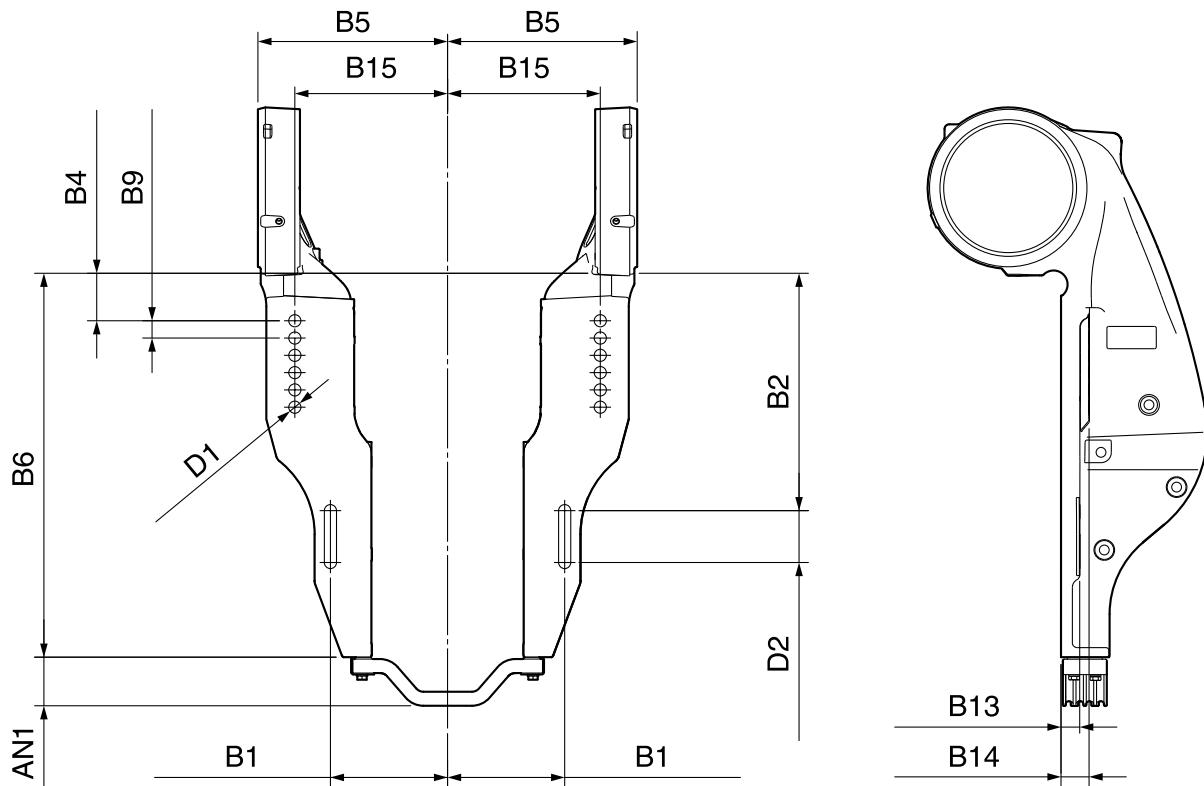


Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.94)	B8	—	B15	163.5 (6.44)	AN1	52.0 (2.05)
B2	254.0 (10.0)	B9	18.5 (0.73)	C1	—	AN2	—
B3	—	B10	—	C2	—		
B4	50.8 (2.00)	B11	—	C3	—		
B5	203.0 (7.99)	B12	—	D1	13.0 (0.51)		
B6	411.0 (16.18)	B13	20.0 (0.79)	D2	55.5 (2.19)		
B7	—	B14	30.0 (1.18)	D3	—		

OUTBOARD MOTOR DIMENSIONS

CLAMP BRACKET DIMENSIONS

Global model	F/FL375A	F/FL425A						
Unified model	XF375	XF425						
PTT								

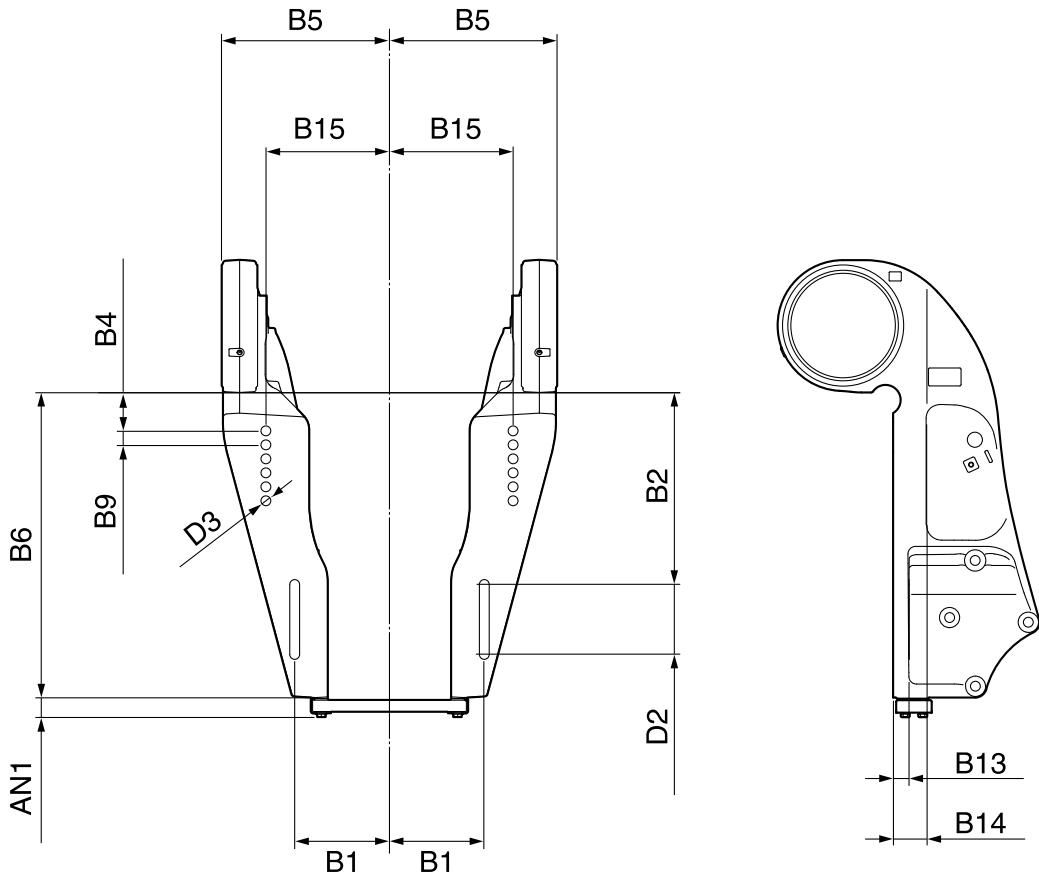

Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)	Symbol	mm (in.)
B1	125.4 (4.9)	B8	—	B15	163.5 (6.4)	AN1	24 (0.9)
B2	254 (10.0)	B9	18.5 (0.7)	C1	—	AN2	—
B3	—	B10	—	C2	—		
B4	50.8 (2.0)	B11	—	C3	—		
B5	222 (8.7)	B12	—	D1	—		
B6	405 (15.9)	B13	21 (0.8)	D2	92.5 (3.6)		
B7	—	B14	45 (1.8)	D3	13 (0.5)		